




Atlas Nail Base Fastener^{HD}

Heavy Duty Nailable Insulation Fastener

DESCRIPTION: Heavy Duty Nailable Insulation Fastener with #4 Heavy Duty Drill Point. Specially engineered for attaching Atlas ACFoam[®] Nail Base and ACFoam[®] CrossVent[®] to thick steel substrates. Atlas Nail Base Fasteners are required for proper mechanical attachment of all ACFoam[®] Nailable Insulation Systems.

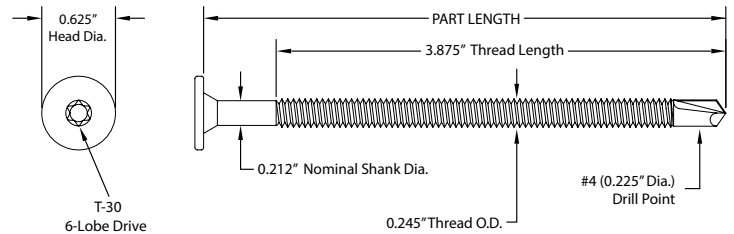

MATERIAL: Case hardened and Tempered Carbon Steel
HEAD STYLE/DRIVE: Pancake Head with T-30 Internal Drive
HEAD DIAMETER: 0.625"
SHANK DIAMETER: 0.212"
THREAD LENGTH: 3.875"
OVERALL LENGTH: 6" thru 13.75"
POINT: #4 (0.225" dia.) Heavy Duty Drill Point
COATING: Epoxy E-Coat (black)
Passes more than 15 cycles (Kesternich) in accordance with DIN 50018

PRODUCT SELECTION

IN	MM	PKG. QTY.
6.0	152	500/PAIL
8.0	203	250/PAIL
9.75	248	250/PAIL
11.75	298	250/PAIL
13.75	349	250/BOX

NOTE: Two T-30 Driver Bits included in each package.

TENSILE STRENGTH	SHEAR STRENGTH	HEAD PULL-THRU VALUE ¹ (¹ / ₁₆ " OSB)
6,000 lbf	3,400 lbf	545 lbf

T-30 DRIVER BIT



WITHDRAWAL VALUES IN STEEL ¹					
Structural Steel	16 Ga.	13 Ga.	12 Ga.	³ / ₁₆ "	¹ / ₄ "
lbf	770	1130	1690	3100	4500

¹"Head Pull-Thru" and "Withdrawal" data reflect average ultimate values.

Note: All tests were conducted by an independent testing laboratory. Test results are offered only as a guide and are not guaranteed in any way by Atlas Roofing Corporation.

Other than the aforementioned representations and descriptions, Atlas Roofing Corporation (hereafter, "Seller") makes no other representations or warranties as to the insulation sold herein. The Seller disclaims all other warranties, express or implied, including the warranty of merchantability and the warranty of fitness for a particular purpose. Seller does, however, have a limited warranty as to the LTR-Value of the insulation, the terms of which are available upon request from the Seller. Seller shall not be liable for any incidental or consequential damages including but not limited to the cost of installation, removal, repair or replacement of this product. Buyer's remedies shall be limited exclusively to, at Seller's option, the repayment of the purchase price or resupply of product manufactured by Atlas in a quantity equal to that of the nonconforming product. Atlas distributors, agents, salespersons or other independent representatives have no authority to waive or alter the above limitation of liability and remedies.