



Expanding Your Solutions



Corporate Headquarters
13191 Crossroads Pkwy N., Ste 325
City of Industry, CA 91746
Phone: 800.775.2362
Fax: 626.330.7598

Manufacturing Facilities
City of Industry, CA
Commerce City, CO
Ft. Worth, TX
Pittsburg, CA

Structural Engineering/Design
1001-A Pittsburgh Antioch Hwy
Pittsburg, CA 94565
Phone: 800.775.2362
Fax: 626.330.7598

Technical Services
13191 Crossroads Pkwy N., Ste 325
City of Industry, CA 91746
Phone: 800.416.2278
Fax: 626.249.5004

DOUBLE "J" CONTROL JOINT (#XJ-15)

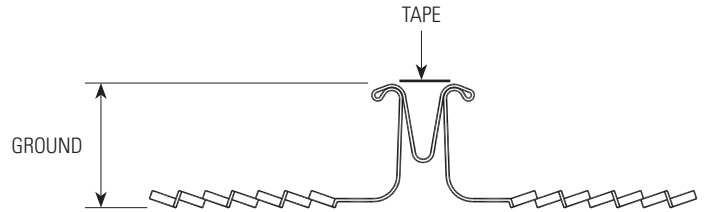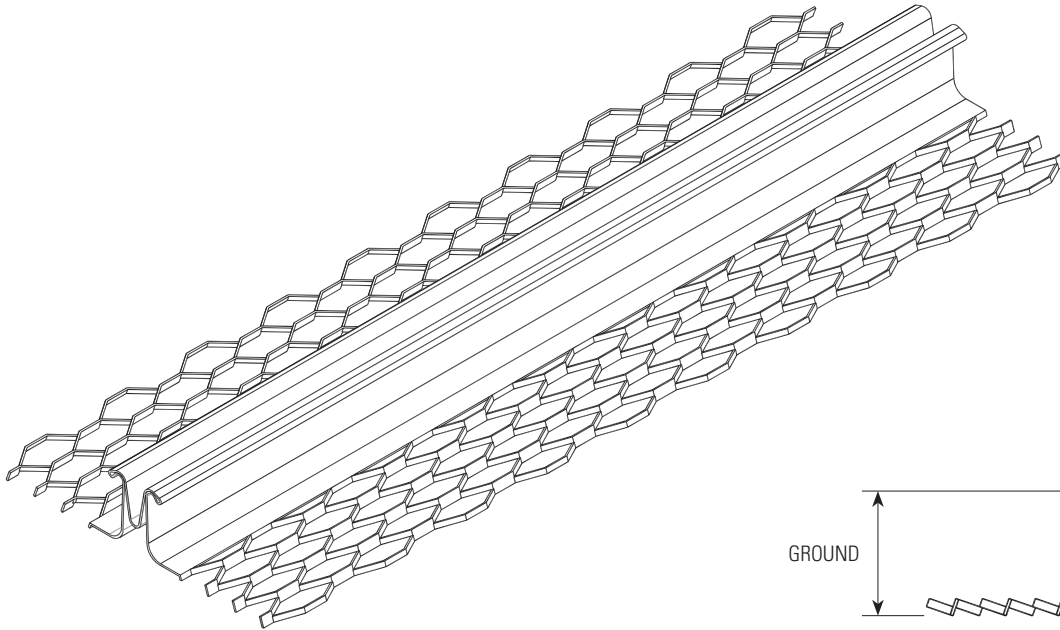

Properties

CEMCO's Double "J" (XJ-15) Control joint relieves stresses and strains in large plaster walls and ceilings. This product has expanded flanges for proper keying and easy application. Its unique design permits the plaster to key underneath the rolled edges for added adhesion while the walls expand and contract under typical conditions. The pull tape on the joint itself provides a clean finish when removed after the finish coat. Double "J" Control Joint is fabricated from 26 gauge galvanized steel in standard G60 coating. G90 coating is available upon request.

Packaging

Product Code	Ground	Pieces / Carton	Length	Feet / Carton	Weight / Carton	Carton / Pallet
JJ12	1/2"	24	10	240	74 lbs.	40
JJ34	3/4"	24	10	240	80 lbs.	40
JJ78	7/8"	24	10	240	84 lbs.	40

Note: 50 bundles per pallet

ASTM & Code Standards:

- ASTM A653
- ASTM A924
- ASTM C840
- ASTM C1063
- IBC: 2021, 2024
- CBC: 2022

LEED v4 for Building and Design Construction

- MR Prerequisite: Construction and Demolition Waste Management Planning.
- MR Credit: Construction and Demolition Waste Management.
- MR Credit: Building Product Disclosure and Optimization – Sourcing of Raw Materials, Option 2.
- MR Credit: Building Product Disclosure and Optimization – Environmental Product Declarations, Options 1 & 2.
- MR Credit: Building Product Disclosure and Optimization – Material Ingredients, Option 1.
- MR Credit: Building Life-Cycle Impact Reduction, Option 4.

CEMCO cold-formed steel framing products contain 30% to 37% recycled steel.

- Total Recycled Content: 36.9%
- Post-Consumer: 19.8%
- Pre-Consumer: 14.4%

Technical Services

Technical Services: 800.416.2278
Structural Engineering/Design: 925.473.9340
www.cemcosteel.com



This technical information reflects the most current information available and supersedes any and all previous publications effective January 09, 2026.