



# Vinylshield™ A, C

## MINERAL FIBER SMOOTH PANEL

A mineral fiber panel that meets federal sanitary requirements, this panel is ideal for sanitary and clean room applications.

### Features & Benefits

- Designed for sanitary and clean room applications or where low particle emissions and maximum cleanliness are required
- Exceeds FGI guidelines for cleanability
- Tested to 2,000+ wash cycles with chemical cleaners/sanitizers
- Satisfies USDA/FSIS guidelines for sanitary applications
- Suited as a clean room component to ISO Class 5
- Vinyl facing provides an easy-to-clean, abuse- and stain-resistant ceiling perfect for restrooms, laboratories, hospitals and sanitary food service areas
- Health Product Declaration (HPD) available for this product
- VinylShield C features vinyl on face and back with sealed edges,
- 30-Year System Warranty when installed with CertainTeed suspension systems
- Build America Buy America (BABA) Act Compliant

### Attributes

 SAG RESISTANT	 BIOSHIELD® MOLD/MILDEW RESISTANT	 EMISSION COMPLIANT CERTIFIED	 WASHABLE W/ SANITIZING CHEMICALS
 LR 0.78	 RECYCLED CONTENT 39-41%		

## LEED® v4

RECYCLED CONTENT		
VINYLSHIELD A CLASS A	41%	
	PRE: 39%	POST: 2%
VINYLSHIELD C CLASS A	39%	
	PRE: 37%	POST: 2%

- ✓ MR: PBT Source Reduction (Healthcare)
- ✓ EQ: Low-Emitting Materials
- ✓ EQ: Daylight
- ✓ MR: Material Ingredients (HPDs)
- ✓ MR: Sourcing Raw Materials
- ✓ MR: Construction and Demolition Waste Management Planning
- ✓ MR: Environmental Product Declarations (EPDs)

LEED® is a registered trademark of the U.S. Green Building Council.


### CERTIFICATIONS & PRODUCT DECLARATIONS

 CERTIFIED ENVIRONMENTAL PRODUCT DECLARATION (e-CPD/EPD)	 HPD AVAILABLE	 BABA COMPLIANT
---	---	--


# Vinylshield™ A, C

## MINERAL FIBER SMOOTH PANEL

### Vinylshield A

		FORMAT	DIMENSIONS (IN.)	NRC	CAC	RECYCLED CONTENT	PIECES/CARTON	SQ. FT./CARTON	LBS./CARTON	CARTONS/PALLET
Trim										
	1102-CRF-1	Panels	24 x 24 x 5/8	—	39	41%	14	56	65	20
	1100-CRF-1	Panels	24 x 48 x 5/8	—	41	41%	8	64	70	18

### Vinylshield C

		FORMAT	DIMENSIONS (IN.)	NRC	CAC	RECYCLED CONTENT	PIECES/CARTON	SQ. FT./CARTON	LBS./CARTON	CARTONS/PALLET
Trim										
	1172-CRF-1	Panels	24 x 24 x 5/8	—	40	39%	14	56	65	20
	1170-CRF-1	Panels	24 x 48 x 5/8	—	42	39%	8	64	70	18

CAN'T FIND A SIZE? Contact your local Sales Representative or call 800-233-8990.

### Accessories

VINYLSHIELD ACCESSORIES	PRODUCT NAME	PIECES/CARTON	USE	
	1170-SEL-1	Mineral Fiber Edge Sealant	1	For re-sealing cut edges; 1 quart container


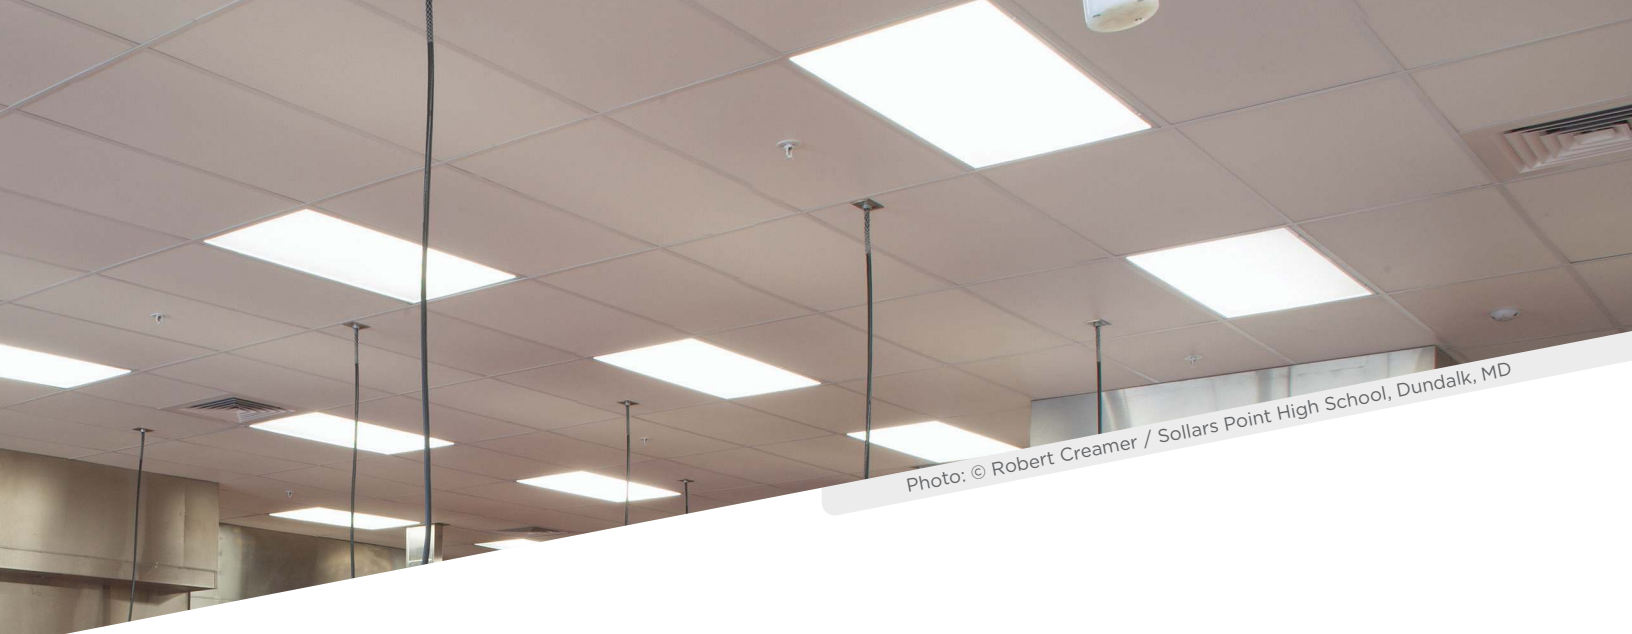


Photo: © Robert Creamer / Sollars Point High School, Dundalk, MD

## Edge Details



Trim  
15/16" EZ Stab  
Classic

## Physical Data

### MATERIAL

Mineral Fiber

### FLAME SPREAD/SMOKE DEV.

Per ASTM E84 — CAN/ULC S102

Flame Spread: 25 or less

Smoke Developed: 50 or less

(Class A per ASTM E1264)

### ASTM E1264 CLASSIFICATION

ASTM E1264-22: Type IV, Form 2, Pattern G

ASTM E1264-23: Type A, Form A2.2, Pattern G

### VOC EMISSIONS

Independently certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.2, 2017.

### MOLD/MILDEW RESISTANCE

BioShield® treatment included for added mold and mildew resistance.

### MAINTENANCE

Wash tested to 2,000+ cycles. Cleanable with sanitizing chemicals.

### WARRANTY

10-year 104/90 Limited Warranty increases to 30 years when installed with CertainTeed suspension systems. Full warranty information can be found at [certainteeted.com/warranty](https://certainteeted.com/warranty).



## CertainTeed

CEILINGS • GYPSUM • INSULATION • ROOFING • SIDING • TRIM  
20 Moores Road, Malvern, PA 19355 800-233-8990 [certainteeted.com](https://certainteeted.com)