

Residential Reference Guide The one-stop guide from North America's Largest Roofing Manufacturer



GAF shingles and roof accessories are made to work together. They provide a system that's built to protect homes—so the people who live inside them can enjoy what matters most.



	LRS	Pages
Technology Index		2
GAF Lifetime [†] Roofing System LF	RS	4-5
GAF Shingles		6–19
Timberline® Lifetime† Shingles	Collec	lion LRS
Timberline® HDZ™	•	8
Timberline® UHD	•	9
Lifetime† Designer Shingles® C	ollection	on LRS
Grand Canyon®	•	11
Grand Sequoia®	•	12
Camelot® II	•	12
Woodland®	•	13
Slateline®	•	13
3-Tab Shingle Collection (Exclu	uded fr	om LRS)
Marquis WeatherMax®		14-15
Shingle Specifications Chart		16-17
GAF Roofing Accessories LRS		18-23
Leak Barriers	•	19
Roof Deck Protection	•	20
Starter Strip Shingles	•	21
Cobra® Attic Ventilation	•	22

Other Products	24-27
Master Flow® Ventilation Products	24
WeatherSide™ Fiber-Cement Siding	25
ThermaCal® Building Envelope Insulation Panels	26
LIBERTY™ Self-Adhering Roofing System	27

Ridge Cap Shingles

23



Trust the diamonds

CAF
LIFETIME
LIMITED
WARRANTY TERM

Install any GAF Lifetime[†] Shingle and get a **Lifetime**[†] **Limited Warranty** on your qualifying shingle. Install any GAF Lifetime Shingle and at least 3 qualifying GAF Accessories, and get a **Lifetime**[†] **Limited Warranty** on your qualifying GAF products.

Whether it's warranty coverage that gives homeowners peace of mind or technology that makes their roof look and perform its best. there's a **GAF** diamond badge behind it.



GAF Advanced Protection® Shingle Technology uses highly advanced design and manufacturing techniques to produce cutting-edge roofing products.



Dura Grip™ Adhesive helps protect your roof investment from winds and wind-driven rain.



StainGuard Plus™ Algae Protection¹ featuring Time-Release Technology is a 25-year limited warranty against blue-green algae discoloration.



StainGuard® Algae Protection² is a 10-year limited warranty against blue-green algae discoloration.



LayerLock™ Technology is a proprietary technology which mechanically fuses the common bond between overlapping shingle layers.



WindProven[™] Limited Wind Warranty³ is a 15-year limited wind warranty with no maximum wind speed limitation — available when you install the LayerLock[™]-labeled Shingles as well as GAF starter strips, roof deck protection, ridge cap shingles, and leak barrier or attic ventilation.



30-Year Limited Warranty Term⁴ gives homeowners protection they can trust.

[†] Lifetime refers to the length of warranty coverage provided and means as long as the original individual owner(s) of a single-family detached residence [or eligible second owner(s)] owns the property where the qualifying GAF products are installed. For other owners/structures, Lifetime coverage is not applicable. For Lifetime coverage on shingles only see GAF Shingle & Accessory Limited Warranty for complete coverage and restrictions. For Lifetime coverage on shingles and accessories see GAF Roofing System Limited Warranty for complete coverage and restrictions. For installations not eligible for the GAF Roofing System Limited Warranty, see the GAF Shingle & Accessory Limited Warranty. Visit gaf.ca/LRS for qualifying GAF products.

¹ StainGuard Plus[™] Time-Release Technology is available only on Shingles sold in packages bearing the StainGuard Plus[™] logo. Products with StainGuard Plus[™] Time-Release Technology are covered by a 25-year limited warranty against blue-green algae discoloration. See *GAF Shingle & Accessory Limited Warranty* for complete coverage and restrictions.

²StainGuard® algae protection is available only on shingles sold in packages bearing the StainGuard® logo. Products with StainGuard® algae protection are covered by a 10-year limited warranty against blue-green algae discoloration. See GAF Shingle & Accessory Limited Warranty for complete coverage and restrictions.

³For installations not eligible for the GAF Roofing System Limited Warranty, see the GAF Shingle and Accessory Limited Warranty for complete coverage and restrictions. Visit gaf.ca/LRS for qualifying GAF products.

 $^{^{\}rm 4}\,{\rm See}$ GAF Shingle & Accessory Limited Warranty for complete coverage and restrictions.

Trust the system that's built to protect


A roof is so much more than shingles. It's layers of protection, working together to help keep your home safe from wind, rain, snow, and even sun.

Install any GAF Lifetime[†] Shingle and at least 3 qualifying GAF Accessories and get a Lifetime[†] limited warranty on your qualifying GAF products plus non-prorated coverage for the first 10 years. For even stronger coverage, ask your GAF factory-certified contractor[†] about enhanced GAF warranties.

Visit **gaf.ca/LRS** for a list of qualifying GAF products.





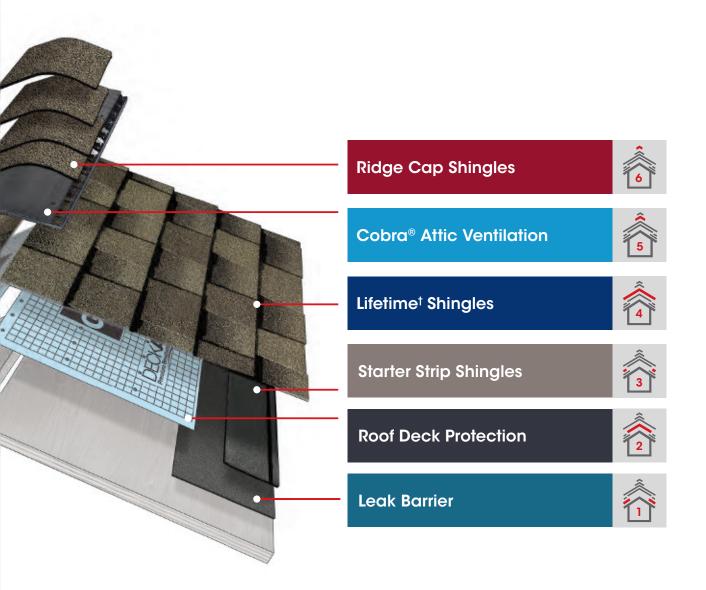

[†] Lifetime refers to the length of warranty coverage provided and means as long as the original individual owner(s) of a single-family detached residence [or eligible second owner(s)] owns the property where the qualifying GAF products are installed. For other owners/structures, Lifetime coverage is not applicable. Lifetime coverage on shingles requires the use of GAF Lifetime Shingles only. Lifetime coverage on shingles and accessories requires the use of any GAF Lifetime Shingle and at least 3 qualifying GAF Accessories. See GAF Roofing System Limited Warranty for complete coverage and restrictions. Visit gaf.ca/LRS for qualifying GAF products. For installations not eligible for the GAF Roofing System Limited Warranty, see the GAF Shingle & Accessory Limited Warranty.

¹ Contractors enrolled in GAF certification programs are not employees or agents of GAF, and GAF does not control or otherwise supervise these independent businesses. Contractors may receive benefits, such as loyalty rewards points and discounts on marketing tools from GAF for participating in the program and offering GAF enhanced warranties, which require the use of a minimum amount of GAF products.



Timberline[®] Lifetime[†] Shingles Collection

More homeowners in North America rely on Timberline® Shingles than any other brand. They offer just the right combination of beauty, performance, and reliability.





For specifications see pages 16-17








Availability

Timberline® H	2	4	
Most Popular Colours:			
Barkwood			•
Canadian Driftwood		•	•
Charcoal			•
Hickory			•
Mission Brown			•
Pewter Gray			•
Shakewood			•
Weathered Wood			•
Regional Colours:			
Birchwood ¹			•
Hunter Green			
Slate		•	•











Timberline[®] Shingles protect millions of families nationwide with great value and a genuine wood-shake look.

Peace of mind has never looked so good.







For more details visit gaf.ca/HDZ



GAF

LIFETIME
LIMITED
WARRANIYTERM

GAF

STAINGUARD
PLUS
ALGAE PROTECTION
TECHNOLOGY

J

Proprietary colour blends and enhanced shadow effects create eye-catching dimensionality on a thick shingle while StainGuard Plus™ Time-Release Technology helps prevent blue-green algae stains.











For more details visit gaf.ca/UHD

Dual Shadow Lines add enhanced dimensionality and take your home's roof—and curb appeal—to new heights. The impact is unmistakable!














For more details visit gaf.ca/DualShadow



Lifetime[†] Designer Shingles Collection

Featuring sophisticated designs, custom colour palettes, and high performance, GAF Lifetime[†] Designer Shingles are also only a fraction of the cost of traditional slate or wood shakes.



Designer Lifetime[†] Shingles

Grand Canyon®	GAF STAINGUARD ALGAE ROTEOTION TECHNOLOGY TECHNOLOGY TECHNOLOGY	Rugged sophistication with striking depth
Grand Sequoia ® pg 12	GAF STAINGUARD ALORE PROTECTION IECTION ICTOR TO TO	Rustic charm meets 21st-century style
Camelot® II pg 12	GAF STAINGUARD ALGAE ROLLING R	Contemporary slate-inspired elegance in an asphalt shingle
Woodland®	GAF STAINGUARD ALSAE ROTEOTION TECHNIQUEST TO THE	The beauty of natural wood shakes in an asphalt shingle
Slateline® pg 13	STAINGUARD AGAE ROTECTION T T T T T T T T T T T T T	An asphalt shingle with the dramatic look of slate

For specifications see pages 16-17









The ultimate choice for a rugged wood-shake look, offering incredible depth and dimension.









For more details visit gaf.ca/GrandCanyon





Artisan-crafted shapes combined with oversized tabs result in a sophisticated beauty unmatched by typical shingles.













For more details visit gaf.ca/GrandSequoia



Designed to complement your home's exterior colour scheme, these shingles give your home the luxury look you want without breaking your budget.













For more details visit gaf.ca/CamelotII











For more details visit gaf.ca/Woodland



Bold shadow lines and tapered cut-outs create the look of slate at a fraction of the cost.











For more details visit gaf.ca/Slateline



3-Tab Shingles

The perfect choice for first-time buyers, these shingles add beauty and performance to any roof.



Marquis WeatherMax®

pg 14-15





Excellent performance and a vivid design make for an exceptional investment

For specifications see pages 16-17

Colour Availability

Marquis WeatherMax®		2	3	
Autumn Brown	•	•	•	
Charcoal	•	•	•	











Outstanding performance and traditional appeal.









Shingle Specifications

Shingle	Warranty	Technology	Shingle Construction				
Timberline® Lifetime† Shingles Collection							
Timberline® HDZ™	t Cor	LATERLOCK TONOLOGY STAINGUARD ACADE TO TONOLOGY TO TOT	ON COMMENSATION DISCUSSION OF STREET COMMENSATION OF STREET				
Timberline® UHD	LIFETIME LIGHT CONTROL OF THE PROPERTY OF THE	STAINGURD DURA CRIP PROTECTI	ÓN				
Lifetime† Designer Shingles	Collection						
Grand Canyon®	LIFETIME DATE OF THE PARTY OF T	STAINCHARD MANAGER PROTECTION SOLICE TO THE PROTECTION OF T	ON CONTRACTOR OF THE PARTY OF T				
Grand Sequoia®	UFFINE USES OF STATE	STANOUARD DURA CRIF ANOLARD ANNEXES AN	ON CONTRACTOR OF THE PARTY OF T				
Woodland®	LIFETIME WESTAMON TIME	STAINGUARD DURK GRIP PROTECTION OF THE PROTECTIO	ON L				
Camelot® II	LIFETIME DATE OF THE PARTY TEN	TAINGUARD DURA GRIP PROTECTION OF THE PROTECTION	ON				
Slateline®	LIFETIME BATTO	STAINGUARD DURA GRIP PROTECTION OF THE PROTECTIO					
3-Tab Shingle							
Marquis WeatherMax®	30-YEAR	DURA GRIP PROTECTION					

[†]Lifetime refers to the length of warranty coverage provided and means as long as the original individual owner(s) of a single-family detached residence [or eligible second owner(s)] owns the property where the qualifying GAF products are installed. For other owners/structures, Lifetime coverage is not applicable. Lifetime coverage on shingles requires the use of GAF Lifetime Shingles only. Lifetime coverage on shingles and accessories requires the use of any GAF Lifetime Shingle and at least 3 qualifying GAF Accessories. See GAF Roofing System Limited Warranty for complete coverage and restrictions. Visit gaf.ca/LRS for qualifying GAF products. For installations not 16 eligible for the GAF Roofing System Limited Warranty, see the GAF Shingle & Accessory Limited Warranty.

¹ See GAF Shingle & Accessory Limited Warranty for complete coverage and restrictions.

² 15-year WindProven™ limited wind warranty on GAF Shingles with LayerLock™ Technology requires the use of GAF Starter Strips, Roof Deck Protection, Ridge Cap Shingles, and Leak Barrier or Attic Ventilation. See GAF Roofing System Limited Warranty for complete coverage and restrictions. Visit gaf.ca/LRS for qualifying GAF products. For installations not eligible for the WindProven™ limited wind warranty, see GAF Shingle & Accessory Limited Warranty for complete coverage and restrictions.

		Approxi	mate						Codes	3			
	Ph	ysical A	sical Attributes			Wi	ind		Nati	onal		Regi	ional
Pieces/Square	Bundles/Square	Nails/Square ⁵	Exposure	Dimensions	UL Listed to ANS/UL 790 Class A and CAN/ULC-S107 Class A	ASTM D7158, Class H	ASTM D3161, Class F	ASTM D3018 Type 1	ASTM D3462°	Classified in accordance with ICC-ES AC438	CSA A123.5	ICC-ES ESR-1475	ICC-ES ESR-3267
64	3	256	5 ⁵ %" (143 mm)	13 ¼" x 39 ¾" (337 x 1,000 mm)	•	•	•	•	•	•	•	•	•
64	4	256	5 ⁵ %" (143 mm)	13 ½" x 39 ¾" (337 x 1,000 mm)	•	•	•	•	•	•	•	•	•
72	6	360	5" 127 mm	17" x 40" (432 x 1,016 mm)	•	•	•	•	•	•	•	•	•
70	5	360	5" (127 mm)	17" x 40" (432 x 1,016 mm)	•	•	•	•	•	•	•	•	
56	4	280	6 ½" (165 mm)	17" x 40" (432 x 1,016 mm)	•	•	•	•	•	•	•	•	•
56	4	280	7 ½" (191 mm)	17" x 34 ½" (432 x 876 mm)	•	•	•	•	•	•	•	•	•
48	3	288	7 ½" (191 mm)	17" x 40" (432 x 1,016 mm)	•	•	•	•	•	•	•	•	•
	64 64 72 70 56	Ph aunhbg/sappung 64 3 64 4 72 6 70 5 56 4	Physical At a special and spec	Physical Attributes automby aut	Physical Attributes 2	Physical Attributes Physical Physical Attributes Physical Attributes	Physical Attributes Fire Will A supplied	Physical Attributes Fire Wind	Second	Physical Affributes	Physical Attributes	Second S	Physical Affributes

³ StainGuard® algae protection is available only on shingles sold in packages bearing the StainGuard® logo. Products with StainGuard® algae protection are covered by a 10-year limited warranty against blue-green algae discoloration. See GAF Shingle & Accessory Limited Warranty for complete coverage and restrictions.

⁴ StainGuard Plus™ Time-Release Technology is available only on shingles sold in packages bearing the StainGuard Plus™ logo. Products with StainGuard Plus™ Time-Release Technology are covered by a 25-year limited warranty against blue-green algae discoloration. See GAF Shingle & Accessory Limited Warranty for complete coverage and restrictions.


⁵Steeper slopes and maximum wind warranties may require more nails.

 $^{^{6}}$ Periodically tested by independent and internal labs to ensure compliance with ASTM D3462 at time of manufacture.



Roofing Accessories

Install any GAF Lifetime[†] Shingle and at least 3 qualifying GAF Accessories and you'll get a Lifetime[†] limited warranty on your qualifying GAF products.



Visit gaf.ca/LRS for a list of qualifying products.

Leak Barriers		Help prevent leaks caused by wind-driven rain and ice dams
Roof Deck Protection	2	Helps shield the roof deck from moisture infiltration
Starter Strip Shingles	3	Help guard against shingle blow-offs at the eaves and rakes
Cobra® Attic Ventilation	5	Helps reduce attic moisture and heat
Ridge Cap Shingles	6	The finishing touch that helps defend against leaks at the hips and ridges

[†] Lifetime refers to the length of warranty coverage provided and means as long as the original individual owner(s) of a single-family detached residence [or eligible second owner(s)] owns the property where the qualifying GAF products are installed. For other owners/structures, Lifetime coverage is not applicable. Lifetime coverage on shingles requires the use of GAF Lifetime Shingles and to coverage on shingles and accessories requires the use of any GAF Lifetime Shingle and at least 3 qualifying GAF Accessories. See GAF Roofing System Limited Warranty for complete coverage and restrictions. Visit gaf.ca/LRS for qualifying products. For installations not eligible for the GAF Roofing System Limited Warranty, see the GAF Shingle & Accessory Limited Warranty.






Leak Barriers

Help prevent leaks caused by wind-driven rain and ice dams.






StormGuard®

WeatherWatch®

- Film-surfaced peel and stick underlayment for asphalt shingles and metal roofing
- Self-seals fasteners and helps protect vulnerable areas of the roof
- 250°F (121.1 °C) high-temperature design. Meets or exceeds the performance criteria of ASTM D1970
- 2 Sq. (200 ft² [18.58 m²]) roll size excludes laps
- Mineral-surfaced peel and stick underlayment for asphalt shingles
- Self-seals fasteners and helps protect vulnerable areas of the roof
- Meets or exceeds the performance criteria of ASTM D1970
- **2** Sq. (200 ft² [18.58 m²]) & 1.5 Sq. (150 ft² [13.94 m²) roll sizes excludes laps

Leak Barrier Application Recommendations:

Strongly recommended around	Optional around	Required by code at ¹	Region ¹
1. Penetrations	E Histor O contra a decar		1 Oaldanaaa
2. Skylights	5. Hips & rake edges	7. Eaves in colder zones Recommended in	1. Colder zone
3. Valleys & dormers	(Distance	warmer zones	0 W.
4. Flashings & transitions	6. Ridges		2. Warmer zone

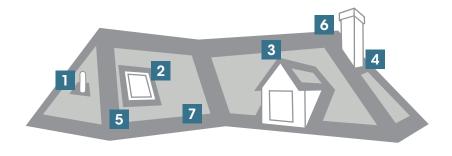



For the full collection visit gaf.ca/LeakBarriers

¹ Always check local building codes for requirements in your area.


² To qualify for this coverage, must be installed with GAF Lifetime Shingles and at least 3 qualifying GAF Accessories. See gaf.ca/LRS for qualifying products and see *GAF Roofing System Limited Warranty* for complete coverage and restrictions.



Roof Deck Protection

Helps shield the roof deck from moisture infiltration.





Deck-Armor[™]



- Premium breathable synthetic underlayment for asphalt shingles and other roof systems
- Nom. 16 perms, high-traction surface helps resist tears
- 48" x 250' (1.22 m x 76.2 m); 10 Sq. (1,000 ft² [92.9 m²]) roll size excludes laps

Tiger Paw™



- Premium synthetic underlayment for asphalt shingles and other roof systems
- High-traction surface helps resist tears, and deck side coating provides moisture control
- 48" x 250' (1.22 m x 76.2 m); 10 Sq. (1,000 ft² [92.9 m²]) roll size excludes laps

FeltBuster®



- High-traction synthetic underlayment for asphalt shingles
- Value-priced, high-traction surface helps resist tearing
- 48" x 250' (1.22 m x 76.2 m); 10 Sq. (1,000 ft² [92.9 m²]) roll size excludes laps

Shingle-Mate™



- Fiberglass-reinforced underlayment for asphalt shingles
- Fiberglass reinforcement lays flat and helps prevent telegraphing through shingles
- 36" x 144' (.914 m x 43.89 m); 4 Sq. (432 ft² [40.13 m²]) roll size excludes laps

Specialty Underlayment






- Fiberglass-reinforced fire-resistant underlayment for asphalt shingles, metal, wood, and other roof systems
- Helps upgrade the UL Fire Rating of many roofing systems (always consult the UL Certification Directory) and helps resist dangerous flame spread
- 42" x 100' (1.07 m x 30.48 m); 3.5 Sq. (350 ft² [32.5 m²]) roll size excludes laps

For the full collection visit gaf.ca/RoofDeckProtection



Help guard against shingle blow-offs at the eaves and rakes.





WeatherBlocker™



- Premium starter strip shingles for all asphalt shingles
- Extra-wide format, pre-perforated design, and factory-applied Dura Grip™ Adhesive
- Full sheets measure 17" x 40" (432 mm x 1,016 mm) and cover 50 lin. ft. (15 lm) per bundle. Half sheets measure 8 1/2" x 40" (216 mm x 1,016 mm) and cover 100 lin. ft. (30 lm) per bundle.

QuickStart®



• Peel and stick starter strip roll for most standard English and metricsized asphalt shingles

- Mineral surfacing with factory-applied Dura Grip™ Adhesive
- 9" x 33' (228 mm x 10 m) roll size

Pro-Start®



Starter strip shingles for most standard English and metric-sized asphalt shingles

- Pre-perforated design with factory-applied Dura Grip™Adhesive
- Full sheets measure 13" x 38" (330 mm x 965 mm) and are split into half sheets measuring 6 $\frac{1}{2}$ " x 38" (165 x 965 mm) to cover 120.33 lin. ft. (36.69 lm) per bundle

StarterMatch®



■ Complementary-colour starter strip shingles for Grand Sequoia® and Grand Canyon® Shingles

- Used in conjunction with WeatherBlocker™
- Full sheets measure 13 ¼" x 40" (337 mm x 1,016 mm) and cover 60 lin. ft. (18.3 lm) per bundle

For the full collection visit gaf.ca/StarterStrip



Cobra® Attic Ventilation

Helps reduce attic moisture and heat.*



Cobra[®]





- Mesh roll ridge vent for all climates
- 10 ½" (267 mm), 8" (203 mm), and 11 ¾" (298 mm) widths; 20' (6.1 m) and 50' (15.24 m) lengths
- Includes 2 ½" (64 mm) Smart Nails™ (Hand Nailable) or 1 ¾" (44 mm) Coil Nails (Nail Gunnable)
- NFA: Hand Nailable 16.9 sq. in./lin. ft. (35,772 mm² per lineal meter); Nail Gunnable - 14.1 sq. in./lin. ft. (29,845 mm² per lineal meter)



Exhaust Vent



- Premium plastic ridge vent for colder climates
- Includes 3" (76 mm) ring shank nails, Snow Guard™ Filter and EasyTear® Sizing
- 11 ½" (292 mm) and 9" (229 mm) widths; 4' (1.2 m) length, 40 lin. ft. (12.2 lm) per box
- NFA: 18 sq. in./lin. ft. (38,100 mm² per lineal meter)

Cobra® RidgeRunner®



- Plastic roll ridge vent for all climates
- Includes 1 ¾ (44 mm) coil nails, Weather Fighter® Filter and EasyTear® Sizing
- 11 ½" (292 mm) width; 20' (6.1 m) length
- NFA: 12.5 sq. in./lin. ft. (26,458 mm² per lineal meter)

Cobra[®] **Hip Vent**



- Plastic hip vent for all climates
- Includes 1 ¾" (44 mm) coil nails and Dual Weather Fighter® Filter
- 11 ½" (292 mm) width; 4' (1.2 m) length, 40 lin. ft. (12.2 lm) per box
- NFA: 9 sq. in./lin. ft. (19,050 mm² per lineal meter)

Intake Ventilation

Cobra IntakePro®



- Tapered roll intake vent for all climates
- Includes 1 3/4" (44 mm) coil nails and end cap fabric
- 11" (279 mm) width; 20' (6.1 m) length
- NFA: 9 sq. in./lin. ft. (19,050 mm² per lineal meter)
- 1. See photo for product placement

For more details visit gaf.ca/Cobra

¹ To qualify for this coverage, must be installed with GAF Lifetime Shingles and at least 3 qualifying GAF Accessories. See gaf.ca/LRS for qualifying products and see GAF Roofing System Limited Warranty for complete coverage and restrictions.



The finishing touch that helps defend against leaks at the hips and ridges.





TimberTex®	STAINGUARD ALGAE PROTECTION	 Premium double-layer ridge cap shingles for use with Timberline® HDZ,™ UHD, with: and GAF Designer Lifetime Shingles Pre-perforated design and factory-applied Dura Grip™ Adhesive 12" (305 mm) width, 8" (203 mm) exposure, covers 20 lin. ft. (6.1 lm) per bundle Available in all areas of Canada
Seal-A-Ridge®	STAINGUARD ALEAE ROJECTION	 Traditional look ridge cap shingles for use with Timberline® HDZ™ and UHD Shingles Pre-perforated design with: and factory-applied Dura Grip™Adhesive 12" (305 mm) width, 6 ¾ (169 mm) exposure, covers 25 lin. ft. (7.6 lm) per bundle Available in all of Canada except British Columbia
TimberCrest®		 Premium SBS-modified bullnose ridge cap shingles for use with Timberline® HDZ™ UHD, and GAF Designer Lifetime Shingles Pre-folded/flexed design with: and factory-applied Dura Grip™ Adhesive 10" (254 mm) and 8" (203 mm) widths, 8" (203 mm) exposure, covers 20 lin. ft. (6.1 lm) per box Available in British Columbia
Ridglass®		 ■ High-profile SBS-modified ridge cap shingles for use with Timberline® HDZ™ and UHD Shingles ■ Pre-folded design with: and factory-applied Dura Grip™ Adhesive ■ 10" (254 mm) and 8" (203 mm) widths, 8" (203 mm) exposure, covers 31 lin. ft. (9.4 lm) per box ■ Available in the British Columbia
Seal-A-Ridge® AS	STAINGUARD ALEAR PROTECTION	 UL Class 4 impact resistance, pre-perforated design with: and factory-applied Dura Grip™ Adhesive For use with GAF ArmorShield® Series Shingles. 12" (305 mm) width, 5" (127 mm) exposure, covers 25 lin. ft. (7.6 lm) per bundle



Ventilation products that help minimize heat and moisture in attics, while helping to resist mold and mildew.







Power attic vents - roof mount		 Exhaust large amounts of heat and moisture from the attic High-efficiency PSC motors Thermostat control included on all models. Optional combo humidistat/thermostat control available on select models Available in popular colours to complement most finished roofs Also available in gable mount
Solar-powered vents	2	 Helps reduce electricity costs associated with operating a fully electric powered vent¹ Available in both solar-powered and unique dual-powered models Solar-powered models run off the sun's power, while dual-powered models switch automatically between sun and house power Thermostat or combo humidistat/thermostat control available on select models
Roof louvers	3	 Allow heat and moisture to escape the attic on roofs with limited ridge Styles: Slant-back, square-top, dome Construction: Aluminum, galvanized, plastic, aluminum granule-coated Net Free Area per Vent: Options from 37 - 144 sq. in. (23,871 - 92,903 mm²)
Aluminum ridge vent	4	 Allows heat and moisture to escape the attic Construction: Aluminum with built-in baffle Net Free Area: 21.5 Sq. in. per lin. ft. (45,508 mm² per lineal meter)
Wind turbines		 Use wind power to pull heat and moisture from the attic Sizes: 12" (305 mm) & 14" (356 mm) Construction: Aluminum internally braced, galvanized internally, or externally braced
Soffit/undereave intake vents		 Allow cooler dry air to enter the attic Styles: Continuous, oval, rectangular, EmberShield® closeable Net Free Area per Vent: Options from 22-68 Sq. in. (14,194-43,871 mm²)
Other vents and accessories	Manuscon Manuscon	Also available: Master Flow® Gable Wall Louvers, Goose Neck Vents, Vent Caps, Chimney Caps, Zinc Strips, Whole House Fans, and Foundation Vents

For the full collection visit gaf.ca/MasterFlow



The one and only solution for replacing old asbestos siding.



Siding -	contains	NO	asbestos1
----------	----------	----	-----------

Siding - contains NO asbes	tos ¹		
Purity™ Shingle		Textured surface with straight, wavy, or thatched edge	■ Size: 12" x 24" (305 mm x 609 mm) ■ Exposure: Straight and Wavy 11" (279 mm), Thatched 10 ½" (267 mm)
Profile Shingle		Striated surface with straight edge	■ Size: 9" x 32" (227 mm x 813 mm) ■ Exposure: 8" (203 mm) ■ Size: 12" x 24" (305 mm x 609 mm) ■ Exposure: 11" (279 mm) ■ Size: 14 ⁵ / ₆ " x 32" (371 mm x 813 mm) ■ Exposure: 13 ⁵ / ₆ " (346 mm)
Emphasis™ Shingle		Extra-thick wood grain look surface with thatched edge	■ Size: 14 ⁵ / ₈ " x 25 ⁵ / ₃₂ " (371 mm x 639 mm) ■ Exposure: 13" (330 mm)
Accessories			
Siding Backer Strips		Help protect the vertical seams between each piece of siding against weather infiltration	■ 9" (227 mm) ■ 12" (305 mm) ■ 14" (357 mm)
Hot-dipped Galvanized Siding Nails		Help provide maximum holding power and an excellent finished look	■ White, ring shank nails ■ 1 ¾" (44 mm)
Pre-primed Individual Corners		Complete the outside corners of your WeatherSide™ Siding job	■ 9" (227 mm) ■ 12" (305 mm) ■ 14" (357 mm) ■ Emphasis™ corners

Visit gaf.ca/WeatherSide



Help reduce heat drive into conditioned/living spaces, and ventilated options exhaust excess moisture to reduce the risk of condensation in the roofing system.



Ventilated Roof Insulation Panels

ThermaCal® 1



- For asphalt shingle and metal roof systems
- Nominal 4' x 8' (1.21 m x 2.44 m) panels with single layer of sheathing (7/16" OSB [11.1 mm] standard); other options available
- Includes air space and tongue-and-groove polyiso foam to reduce heat loss through panel joints
- Pre-spaced sheathing eliminates the need for H-clips and allows for sheathing expansion

ThermaCal® 2



- For slate, tile, and maximum loading roof systems
- Nominal 4' x 8' (1.21 m x 2.44 m) panels with two layers of sheathing (7/₁₆" OSB [11.1 mm] standard); other options available
- Includes air space and tongue-and-groove polyiso foam to reduce heat loss through panel joints
- Pre-spaced sheathing eliminates the need for H-clips and allows for sheathing expansion

Non-Ventilated Roof Insulation Panels

ThermaCal®



- For metal roof systems
- Nominal 4' x 8' (1.21 m x 2.44 m) panels with single layer of sheathing (7/16" OSB [11.1 mm] standard); other options available
- Tongue-and-groove polyiso foam to reduce heat loss through panel joints
- Pre-spaced sheathing eliminates the need for H-clips and allows for sheathing expansion

Exterior Wall Insulation Panels

ThermaCal® Wall




- Nominal 4' x 8' (1.21 m x 2.44 m) panels with one layer of sheathing (7/16" OSB [11.1 mm] standard); other options available
- Includes tongue-and-groove polyiso foam (8' [2.44 m] sides only) to reduce heat loss through panel joints
- Pre-spaced sheathing (8' [2.44 m] sides) allows for precision fit and sheathing expansion

Nail Base Insulation Panel Fasteners

ThermaCal® **Light-duty drill** point fasteners

ThermaCal® Thread point fasteners



- Designed for attaching ThermaCal® Insulation Panels to steel roof decks/substrates
- Manufactured with case-hardened and tempered carbon steel
- Designed for attaching ThermaCal® Insulation Panels to wood roof decks/substrates
- Manufactured with case-hardened and tempered carbon steel


For the full collection visit gaf.ca/ThermaCal



Self-adhering low-slope roofing systems. Perfect for porches, garages, car ports, and sunrooms!





















Talk to GAF first

The partners you count on to support your roofing business are ready to champion your growth in whatever direction you want to go. GAF offers a full line of low-slope and steep-slope roofing systems. Technical support. Expert training. And excellent warranties and guarantees backed by North America's largest roofing manufacturer. If you're ready to grow, talk to GAF, first. gaf.ca/TalktoGAF