
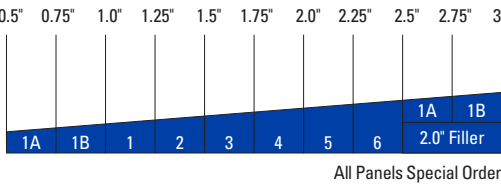
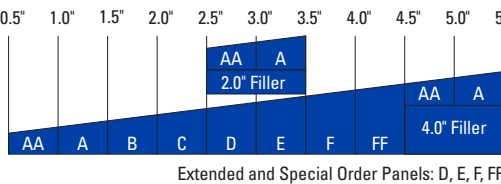
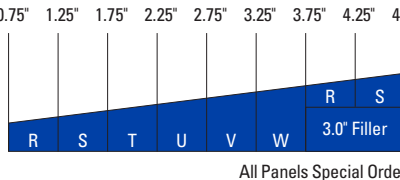


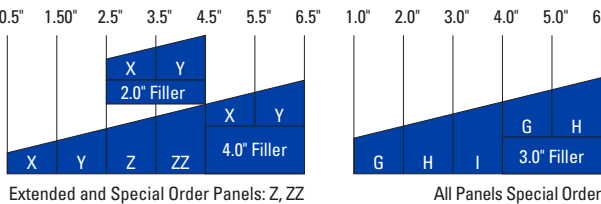



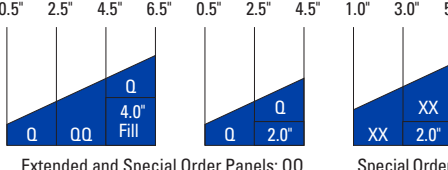

TAPERED POLYISO INSULATION

Panel Designation	Slope (in./ft)	Dimension (in.)		LTTR* Value Nominal	Pieces per Unit	Square Feet per Unit	Board Feet per Unit	Slope Profiles	
		Thin	Thick						
1/16 in./ft (5.2 mm/m)									
1A	1/16	0.5	0.75	3.6	70	1,120	700	 All Panels Special Order	
1B	1/16	0.75	1	5.0	50	800	700		
1	1/16	1	1.25	6.4	38	608	684		
2	1/16	1.25	1.5	7.8	32	512	704		
3	1/16	1.5	1.75	9.3	28	416	676		
4	1/16	1.75	2	10.7	22	352	660		
5	1/16	2	2.25	12.1	20	320	680		
6	1/16	2.25	2.5	13.6	18	288	684		
1/8 in./ft (10.4 mm/m)									
AA	1/8	0.5	1	4.3	64	1,024	768	 Extended and Special Order Panels: D, E, F, FF	
A	1/8	1	1.5	7.1	38	608	760		
B	1/8	1.5	2	10.0	26	416	728		
C	1/8	2	2.5	12.9	20	320	720		
D**	1/8	2.5	3	15.9	16	256	704		
E**	1/8	3	3.5	18.9	14	224	728		
F**	1/8	3.5	4	22.1	12	192	720		
FF**	1/8	4	4.5	25.3	10	160	680		
R	1/8	0.75	1.25	5.7	44	704	704	 All Panels Special Order	
S	1/8	1.25	1.75	8.6	30	480	720		
T	1/8	1.75	2.25	11.4	22	352	704		
U	1/8	2.25	2.75	14.4	16	256	640		
V	1/8	2.75	3.25	17.4	14	224	672		
W	1/8	3.25	3.75	20.5	12	192	672		
3/16 in./ft (15.6 mm/m)									
J	3/16	1	1.75	7.8	32	512	704		 All Panels Special Order  All Panels Special Order
K	3/16	1.75	2.5	12.1	20	320	680		
L**	3/16	2.5	3.25	16.6	16	256	736		
M**	3/16	3.25	4	21.2	12	192	696		
JJ	3/16	0.5	1.25	5.0	52	832	728		
KK	3/16	1.25	2	9.3	28	448	728		
LL**	3/16	2	2.75	13.6	18	288	691		
MM**	3/16	2.75	3.5	18.2	14	224	694		
1/4 in./ft (20.8 mm/m)									
G	1/4	1	2	8.6	30	480	720	 Extended and Special Order Panels: Z, ZZ	
H	1/4	2	3	14.4	18	256	640		
I**	1/4	3	4	20.5	12	192	672		
X	1/4	0.5	1.5	5.7	48	768	768		
Y	1/4	1.5	2.5	11.4	24	384	768		
Z**	1/4	2.5	3.5	17.4	16	256	768		
ZZ**	1/4	3.5	4.5	23.6	12	192	768		
3/8 in./ft (31.2 mm/m)									
SS	3/8	0.5	2	7.1	36	576	720	 All Panels Special Order	
TT**	3/8	2	3.5	15.9	16	256	704		
1/2 in./ft (41.6 mm/m)									
Q	1/2	0.5	2.5	8.6	32	512	768	 Extended and Special Order Panels: QQ Special Order	
QQ**	1/2	2.5	4.5	20.5	12	192	672		
XX	1/2	1	3	11.4	22	352	704		

* (hr•ft²•°F/Btu)
Please refer to the Tapered ENRGY 3® data sheet for typical physical properties.

** Extended panels require less adhesive and less labor.