

STEGO[™] TERM BAR


A STEGO INDUSTRIES, LLC INNOVATION | VAPOUR RETARDERS 07 26 00, 03 30 00 | VERSION: 3 MAR 2022



STEGO TERM BAR

MANUFACTURER

Stego Industries, LLC 216 Avenida Fabricante, Suite 101 San Clemente, CA 92672 USA Sales, Technical Assistance +1 (877) 464-7834 international@stegoindustries.com stegoindustries.com

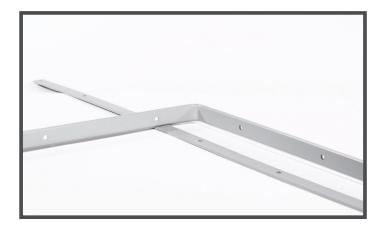

3.

PRODUCT DESCRIPTION

USES: Stego Term Bar is a semi-flexible plastic termination bar used for mechanically securing Stego™ Wrap or other materials to concrete, masonry, or wood.

COMPOSITION: Stego Term Bar is made from post-industrial recycled PVC.

SIZE: Stego Term Bar is 1066.8 mm x 28.6 mm (42" x 1.125").

4.) TECHNICAL DATA	
TABLE 4.1: PHYSICAL PROPERTIES OF STEGO TERM BAR	
PROPERTY	RESULTS
Dimensions	1066.8 mm x 28.6 mm (42" x 1.125")
Colour	Grey
Material	Recycled PVC
Weight	113.3 grams (4 oz)

5. INSTALLATION

UNDER SLAB: Nail through Stego Term Bar and Stego Wrap to secure material as needed. If the beveled edge is facing the wall, a pocket/lip is created for mastic/sealant to be used if required. Pre-drilled nail holes are provided every 150 mm for ease of installation.

To cut Stego Term Bar, score with a utility knife or wire snips. Stego Term Bar can be bent back and forth and then broken at desired locations as well.

Stego Term Bar is flexible enough to bend around corners and contours in the wall for easy installation.

For additional information, please refer to Stego's complete installation instructions.

STEGO[™] TERM BAR

A STEGO INDUSTRIES, LLC INNOVATION | VAPOUR RETARDERS 07 26 00, 03 30 00 | VERSION: 3 MAR 2022

6. AVAILABILITY & COST

Stego Term Bar is available through our network of building supply distributors. For current cost information, contact your local Stego Wrap distributor or Stego Industries' Sales Representative.

7. WARRANTY

Stego Industries, LLC believes to the best of its knowledge, that specifications and recommendations herein are accurate and reliable. However, since site conditions are not within its control, Stego Industries does not guarantee results from the use of the information provided herein. Stego Industries, LLC does offer a limited warranty on Stego Wrap. Please see **stegoindustries.com/legal**

MAINTENANCE

Store above 16°C (60°F). Term Bar will become less flexible at lower temperatures.

TECHNICAL SERVICES

Technical advice, custom CAD drawings, and additional information can be obtained by contacting Stego Industries or by visiting the website.

Email:international@stegoindustries.comContact Number:+1 (877) 464-7834Website:stegoindustries.com

10. FILING SYSTEMS: stegoindustries.com



+1 (877) 464-7834 | stegoindustries.com

DATA SHEETS ARE SUBJECT TO CHANGE. FOR MOST CURRENT VERSION, VISIT STEGOINDUSTRIES.COM