FILAMENTS®

Fabric Panels

Filaments Anchorage - Pumpkin (Special Order Color)

Key Selection Attributes

- Good sound absorption, fabric-covered square Tegular panels
- InterfaceFABRIC™ – made of 100% recyclable material
- Coordinates with Formations™ Clouds and some office furniture collections

Color Selection

Due to printing limitations, shade may vary from actual product.

Colored ceiling materials are dye-lotted and should be segregated by dye lot. Do not mix.

ANCHORAGE

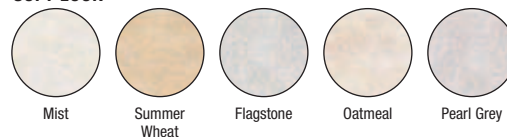|			
Slate	Angora	Goose	Birch
Wolf	Vanilla		

LIDO

Cape May	Oak Bluffs	Hermosa	Huntington

NITRO

Tonic	Spritzer	Gingerale	Crystal	Cream Soda

NETWORK

Horizon	Frost	Powder	Sunbeam	Putty

SOFT LOOK

|				
Mist	Summer Wheat	Flagstone	Oatmeal	Pearl Grey

Add a bit of bold! Coordinate with Soundsoak® Acoustical Walls, SoundScapes® Shapes and Canopies, Infusions® Accent Canopies, Infusions Partitions, Infusions Lay-in Panels, and Formations Clouds, and some office furniture collections for a custom look. Color coordinated grid in RAL colors and custom colors available.
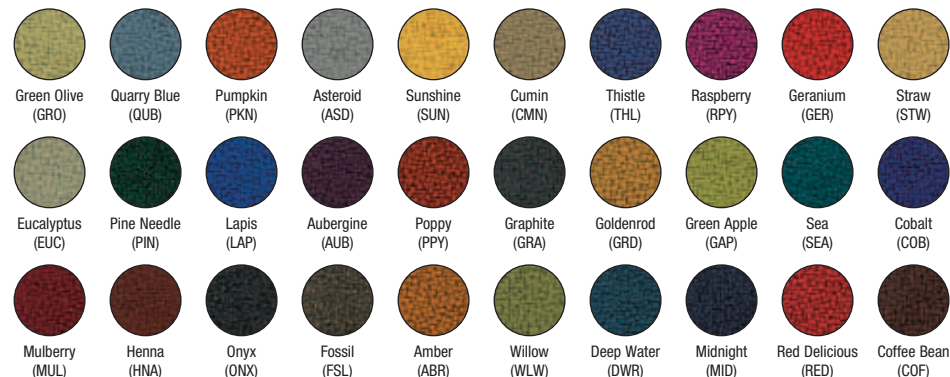
Detail

Filaments Network

Filaments Network with Prelude® 15/16" Exposed Tee Grid

Anchorage – Special Order Colors

Green Olive (GRO)	Quarry Blue (QUB)	Pumpkin (PKN)	Asteroid (ASD)	Sunshine (SUN)	Cumin (CMN)	Thistle (THL)	Raspberry (RPY)	Geranium (GER)	Straw (STW)
Eucalyptus (EUC)	Pine Needle (PIN)	Lapis (LAP)	Aubergine (AUB)	Poppy (PPY)	Graphite (GRA)	Goldenrod (GRD)	Green Apple (GAP)	Sea (SEA)	Cobalt (COB)
Mulberry (MUL)	Henna (HNA)	Onyx (ONX)	Fossil (FSL)	Amber (ABR)	Willow (WLW)	Deep Water (DWR)	Midnight (MID)	Red Delicious (RED)	Coffee Bean (COF)

Note: Specify Special Order Items by adding color suffix to Master Item Number 4790XXX.
Example: Specify 4790QUB for Special Order Item Quarry Blue.

FILAMENTS®

Fabric Panels

\

LEED® Credits

Energy	Waste Mgmt	Recycled Content	Local Materials	Renewable Materials	Daylight & Views
	✔	✔	✔	✔	

Location Dependent

LEED for Schools

Acoustics	Low Emitting or CHPS
	✔

$$$$$

Visual Selection

Performance Selection   Dots represent highest level of performance.

Factory Mutual Certified

Edge Profile	Suspension Detail Dwg. Pgs. 226-228	Item No.	Dimensions	Colors	Acoustics NRC	CAC	Fire Rating	Sag Resist	VOC Formal-dehyde	Durability

Anchorage – Additional colors available as specials. Minimum order quantity of 520 SF. (Master item 4790 listed below. Color suffixes can be found on opposite page.)

Edge Profile	Suspension	Item No.	Dimensions	Colors	NRC	CAC	Fire Rating	Sag Resist	VOC Formal-dehyde	Durability
15/16" Square Tegular	18	4749	2' x 2' x 3/4"	Slate	0.55	35	Class A	Standard	Low	Standard
	18	4750	2' x 2' x 3/4"	Wolf	0.55	35	Class A	Standard	Low	Standard
	18	4751	2' x 2' x 3/4"	Angora	0.55	35	Class A	Standard	Low	Standard
	18	4752	2' x 2' x 3/4"	Goose	0.55	35	Class A	Standard	Low	Standard
	18	4753	2' x 2' x 3/4"	Vanilla	0.55	35	Class A	Standard	Low	Standard
	18	4754	2' x 2' x 3/4"	Birch	0.55	35	Class A	Standard	Low	Standard
	18	4790_ _ _*	2' x 2' x 3/4"	Special Order Colors	0.55	35	Class A	Standard	Low	Standard

Lido

15/16" Square Tegular	18	4745	2' x 2' x 3/4"	Hermosa	0.65 ●	35	Class A	Standard	Low	Standard
	18	4746	2' x 2' x 3/4"	Cape May	0.65 ●	35	Class A	Standard	Low	Standard
	18	4747	2' x 2' x 3/4"	Oak Bluffs	0.65 ●	35	Class A	Standard	Low	Standard
	18	4748	2' x 2' x 3/4"	Huntington	0.65 ●	35	Class A	Standard	Low	Standard

Network

15/16" Square Tegular	18	4760	2' x 2' x 3/4"	Horizon	0.55	35	Class A	Standard	Low	Standard
	18	4761	2' x 2' x 3/4"	Frost	0.55	35	Class A	Standard	Low	Standard
	18	4762	2' x 2' x 3/4"	Powder	0.55	35	Class A	Standard	Low	Standard
	18	4763	2' x 2' x 3/4"	Putty	0.55	35	Class A	Standard	Low	Standard
	18	4764	2' x 2' x 3/4"	Sunbeam	0.55	35	Class A	Standard	Low	Standard

Nitro

15/16" Square Tegular	18	4755	2' x 2' x 3/4"	Tonic	0.55	35	Class A	Standard	Low	Standard
	18	4756	2' x 2' x 3/4"	Spritzer	0.55	35	Class A	Standard	Low	Standard
	18	4757	2' x 2' x 3/4"	Gingerale	0.55	35	Class A	Standard	Low	Standard
	18	4758	2' x 2' x 3/4"	Cream Soda	0.55	35	Class A	Standard	Low	Standard
	18	4759	2' x 2' x 3/4"	Crystal	0.55	35	Class A	Standard	Low	Standard

Soft Look®

15/16" Radiused Tegular	69	4711	2' x 2' x 7/8"	Summer Wheat	0.60	33	Class A	Standard	Low	Standard
	69	4712	2' x 2' x 7/8"	Flagstone	0.60	33	Class A	Standard	Low	Standard
	69	4713	2' x 2' x 7/8"	Mist	0.60	33	Class A	Standard	Low	Standard
	69	4718	2' x 2' x 7/8"	Oatmeal	0.60	33	Class A	Standard	Low	Standard
	69	4723	2' x 2' x 7/8"	Pearl Grey	0.60	33	Class A	Standard	Low	Standard

* Specify Special Order Items by adding color suffix to Master Item Number 4790. Example: Specify 4790ASD for Special Order Item Asteroid.

Suspension Systems

15/16"

Prelude® XL®

Grid Color Selection   Due to printing limitations, shade may vary from actual product.

White (WH) • Cream (CR) • Haze (HA) • Vanilla (VA) • Camel (CM) • Oyster (YS) • Platinum (PL) • Adobe (AD) • Silver Grey (SG) • Gun Metal Grey (MY) • Slate (ST) • Wolf (WK)

Special Order Grid Colors

Select any RAL Color

For coordinating RAL grid colors, refer to page 208 or our web site armstrong.com/ceilings (Search: painted grid).

Custom grid colors also available. Contact your local Armstrong Sales Representative for more information.

Physical Data

Material
Wet-formed mineral fiber covered with woven fabric
Soft Look items: non-woven fabric

Surface Finish
Woven fabric
Soft Look items: Needle-punched; nonwoven fabric

Fire Performance
Factory Mutual approved. Specification tested per ASTM E84 and CAN/ULC S102. Flame Spread Index 25 or less. Smoke Developed Index 50 or less.

ASTM E1264 Classification
Type XI, Form 2, Pattern Z
(Woven fabric finish, Soft Look – non-woven)

VOC/Formaldehyde Emissions
Meets CA Dept. of Health Services Standard Practice for the testing of VOC Emissions depending on ceiling use and building parameters. Contact TechLine to evaluate performance.

Insulation Value
R Factor – 1.4 (BTU units)
R Factor – 0.24 (Watts units)
Soft Look items:
R Factor – 2.0 (BTU units)
R Factor – 0.35 (Watts units)

Warranty
Refer to warranty details in the back of this catalog

Application Considerations
Lido, Network, and Nitro fabrics are directional. Fabric ceiling panels are dye-lotted and should be segregated by dye lot. Do not mix. For fabric ceilings cleaning instructions, refer to LA-297159 Filaments Installation Tip Sheet.

Weight; Square Feet/Carton
1.28 lbs/SF; 40 SF/ctn
Soft Look items: 0.95 lbs/SF; 40 SF/ctn

TechLineSM 877 ARMSTRONG

Armstrong®

98

ALTERNATIVE MATERIALS