




PROPER VENTILATION IS VITAL

Protection against damage to the roofing materials and structure increase comfort inside the home and energy savings.



Triple 3-1/3" InvisiVent and Hidden Vent offers at least 50% more ventilation than most standard vinyl soffit, providing more than 10" of net-free intake area.

This means that not only will InvisiVent provide a balanced ventilation system, but will do so with an overhang as short as 10".



Ridge Vents (exhaust)

a balance of air intake and exhaust that creates a uniform flow of air through the attic.

This system creates a condition in which the roof temperature is equalized from top to bottom, supplying a uniform air flow along the entire underside of the roof deck.

Hidden vents provide a smooth, flat non-perforated surface versus most vented soffits with unsightly perforations.



Triple 3-1/3" InvisiVent

Soffit Vents (intake)



Standard vented soffit

TRIPLE 3-1/3" SOLID

Perfect for Vertical Siding Applications, Too.

Solid Triple 3-1/3" vertical siding panels are the ideal solution for accent areas where a vented panel is not necessary. The flat face design creates a straighter panel with the look of smooth, painted wood. Deep dovetails between panel faces contribute extra rigidity, while forming a clear, sharp edge that is pleasing to the eye. Ideal as an accent or coordinating panel, Solid Triple 3-1/3" is available in the same color palette as Triple 3-1/3" InvisiVent.



Triple 3-1/3"


- InvisiVent® and solid styles.†
- The only vinyl soffit to provide more than 10 inches of net-free intake area.
- Concealed intake vents provide a smooth appearance.
- Matte finish looks like freshly painted wood.
- Deep 3/4" panel projection creates sharp definition.
- 13 low-gloss colors.
- Heavy-duty .044" thickness for rigidity.

Perimeter Triple 3-1/3"

- Solid and hidden vent styles.†
- 14 low-gloss colors.
- .040" thickness.
- Hidden vent style provides up to 9.65" of net-free intake area.

Chamfer Board™ Double 5"

- Solid and fully vented soffit.†
- Extra thick .044" construction.
- Designed for vertical siding, porch ceiling and soffit application.
- 8 low-gloss colors.
- 6.4" of net-free air per sq. ft.-fully vented.



3-1/3" 3-1/3" 3-1/3"

3-1/3" 3-1/3" 3-1/3"

3/4"

5/8"

Perma CO

Ironmax[™] Double 5"

- Solid and fully vented styles.†
- Extra-thick .046" construction for optimum strength and flat face appearance.
- Designed for vertical siding, porch ceiling and soffit applications.
- Unique post-formed lock design helps ensure secure installation.
- 32 low-gloss woodgrain colors (sable brown, pacific blue, ivy green, autumn red, charcoal gray and forest for soffit applications only).
- 6.4" of net-free air per sq. ft. fully vented.

Beaded Triple 2"

- Wainscot style in solid and invisibly vented.†
- Designed for vertical siding, porch ceiling and soffit applications.
- Smooth finish appearance of professionally applied paint.
- Extra-long slip-lock design helps provide secure installation.
- 8 low-gloss colors.
- .039" thickness.
- 1.6" of net-free air per sq. ft. invisibly vented.

Universal Triple 4"


- Solid, fully vented and center vented styles.†
- Designed for vertical siding, porch ceiling and soffit applications.
- Matte finish.
- Post-formed lock design helps provide secure installation.
- 35 low-gloss colors.
- .040" thickness.
- 5.9" of net-free air per sq.ft. fully vented.
- 2" of net-free air per sq. ft. center vented.

Value Triple 4" & Double 5" Soffit

9 colors in Triple 4": colonial white, snow, heritage cream, herringbone, desert tan, light maple, sterling gray, savannah wicker and natural clay 5 colors in Double 5": colonial white, desert tan, savannah wicker, sterling gray and natural clay


All CertainTeed Soffits Feature:

- Virtually maintenance free, never needs painting.
- Class 1(A) fire rating.
- Lifetime limited warranty.



Color performance, impact resistance and durability are assured through our exclusive PermaColor™ System, a blend of our own Certavin™ resin, superior micro-ingredients and state-of-the-art pigment chemistry.		Triple 3-1/3"	imeter Triple 3-1/3"	er Board" Double 5"	ronmax" Double 5"	Beaded Triple 2"	Universal Triple 4"	iple 4" & Double 5" (Soffit Use Only)	
**	Arbor Blend				•				
**	Arctic Blend				•				
**	Weathered Blend				•				
**	Frontier Blend		70	-	•	==	= 1		
**	Timber Blend	-	1	1	•				
*	Canyon Blend				•				
*	Meadow Blend				•	3			
*	Glacier Blend				•				
**	Musket Brown (soffit only)						•		
	Autumn Red				●Ħ		•		
	Terra Cotta						•		
	Mountain Cedar						•		
	Sable Brown				●Ħ		•		
	Hearthstone						•		
	Suede						•		
	Spruce						•		
	Forest				● ††		•		
	Ivy Green				●H		•		
	Pacific Blue				●Ħ		•		
	Flagstone						•		
	Charcoal Gray		•		•#		•		
	Granite Gray	•	•	•	•		•		
	Sterling Gray	•	•	•	•	•	•	•	
	Bermuda Blue						•		
	Oxford Blue				•		•		
	Seagrass	•	•		•		•		
	Cypress	•	•	•	•		•		
	Green Tea						•		
	Linen				•		•		
	Silver Ash				•		•		Ì
	Warm Sand				•		•		
	Herringbone	•	•		•		•	•	
	Sandstone Beige	•	•		•	•	•		
	Desert Tan	•	•		•	•	•	•	
	Natural Clay	•	•	•	•	•	•	•	
	Savannah Wicker	•	•	•	•	•	•	•	
	Light Maple	•	•	•	•		•	•	
	Buckskin				•		•		
	Sandpiper						•		ĺ
	Heritage Cream	•	•	•	•	•	•	•	ĺ
	Autumn Yellow						•		
	Snow	•	•		•	•	•	•	
	Colonial White	•	•	•	•	•	•	•	
** PREMIUM COLORS * DELUXE COLORS # SOFFIT USE ONLY									



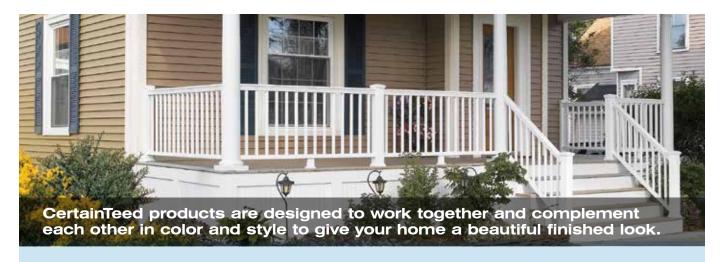



Polymer Shakes & Shingles



Insulated Sidina



Vinyl Siding



Fiber Cement Siding



PVC Exterior Trim & Beadboard



Vinyl Carpentry® Trim



Fence



Decking and Railing



Housewrap



Professional: facebook.com/CertainTeedFreedomofChoice Consumer: facebook.com/CertainTeedLivingSpaces

[Be Certain] Confidence worth building on.™

ASK ABOUT OUR OTHER CERTAINTEED® PRODUCTS AND SYSTEMS:

ROOFING • SIDING • TRIM • DECKING • RAILING • FENCE • FOUNDATIONS GYPSUM • CEILINGS • INSULATION • PIPE

www.certainteed.com http://blog.certainteed.com CertainTeed Corporation P.O. Box 860

Valley Forge, PA 19482

Professional: 800-233-8990 Consumer: 800-782-8777

© 1/14 CertainTeed Corporation, Printed in U.S.A. Code No. CTS150

