




www.acudor.com
 U.S.A.: info@acudor.com / 800.722.0501
 CANADA: info@acudor.ca / 844.228.3671
 INTERNATIONAL: info@acudorintl.com
 (905) 428.2240

ADWT

AIRTIGHT / WATERTIGHT

QTY.	NOMINAL SIZE	A	B	C	D	E	F	SCREWS
	12 x 12 (305 x 305)	9.65 (245)	9.65 (245)	14.75 (375)	14.75 (375)	12.00 (305)	12.00 (305)	2
	14 x 14 (355 x 355)	11.65 (296)	11.65 (296)	16.75 (425)	16.75 (425)	14.00 (355)	14.00 (355)	2
	18 x 18 (457 x 457)	15.65 (397)	15.65 (397)	20.75 (527)	20.75 (527)	18.00 (457)	18.00 (457)	2
	24 x 24 (610 x 610)	21.65 (550)	21.65 (550)	26.75 (679)	26.75 (679)	24.00 (610)	24.00 (610)	2
	24 x 36 (610 x 914)	33.65 (855)	21.65 (550)	26.75 (679)	38.75 (984)	24.00 (610)	36.00 (914)	3
	30 x 30 (762 x 762)	27.65 (702)	27.65 (702)	32.75 (832)	32.75 (832)	30.00 (762)	30.00 (762)	5
	30 x 48 (762 x 1219)	45.65 (1159)	27.65 (702)	32.75 (832)	50.75 (1289)	30.00 (762)	48.00 (1219)	5
	36 x 48 (914 x 1219)	45.65 (1159)	33.65 (855)	38.75 (984)	50.75 (1289)	36.00 (914)	48.00 (1219)	5

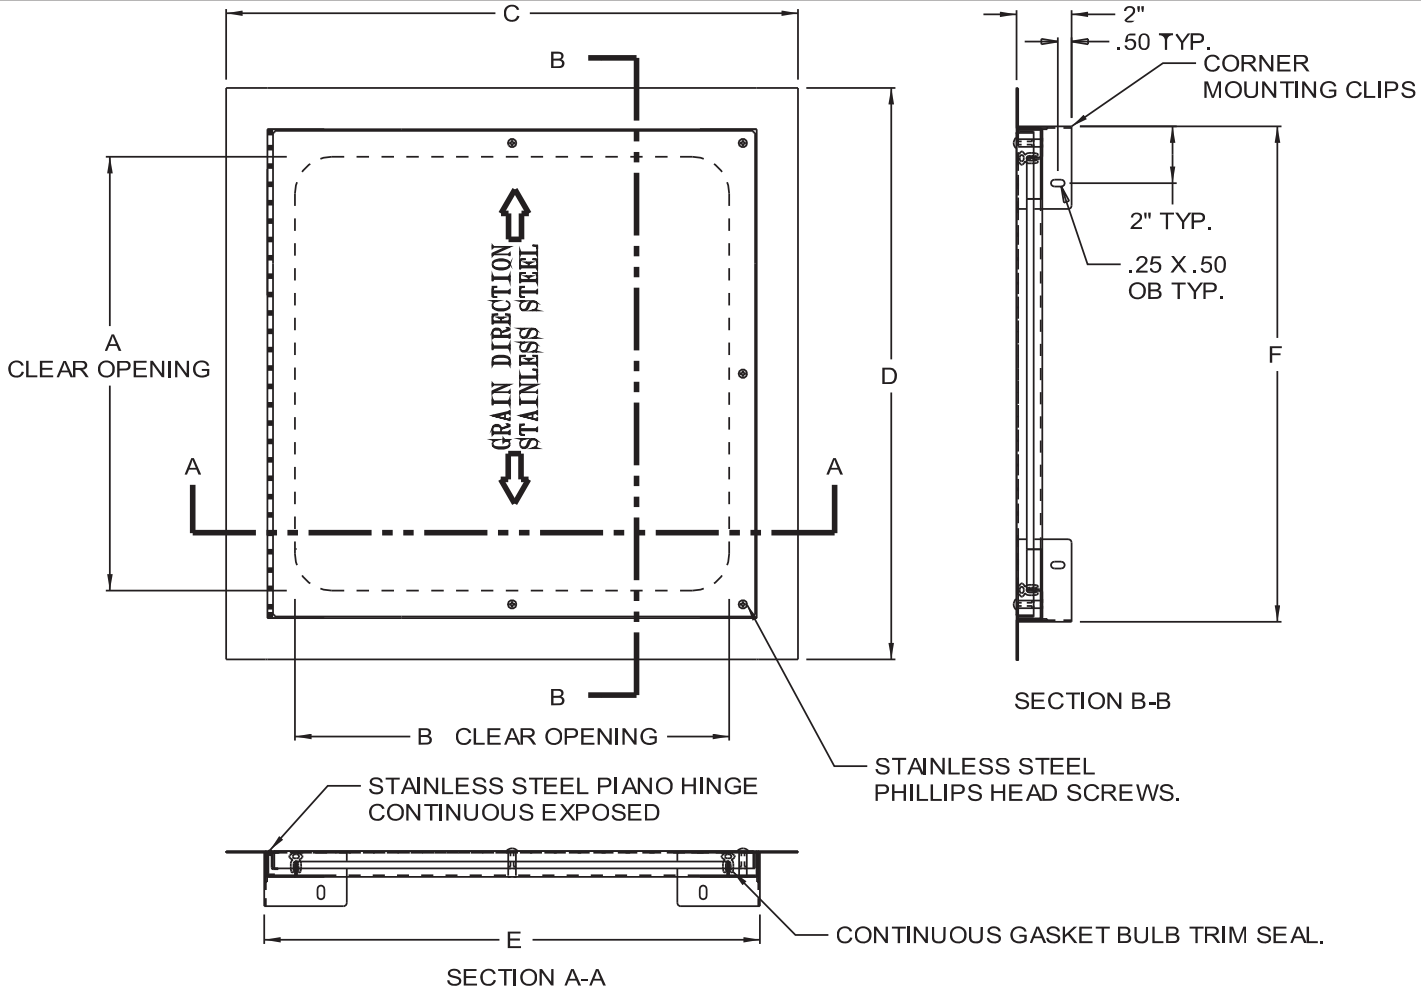

THIS DOOR HAS BEEN TESTED AS FOLLOWS:
 AIR INFILTRATION & EXFILTRATION : LEAKAGE ≤ 0.01 CFM/FT²: ASTM E 283/E283M-19
 WATER RESISTANCE : NO LEAKAGE AT 15.04 PSF: ASTM E 331-00 (2016)

STANDARD FEATURES:
 FRAME FULLY WELDED TO PREVENT LEAKAGE.
 CONTINUOUS GASKET BULB TRIM SEAL.
 STAINLESS STEEL PHILLIPS HEAD SCREWS

ASTM E283/E283M-19: "Standard Test Method for Determining Rate of Air Leakage Through Exterior Windows, Curtain Walls, and Doors Under Specified Pressure Differences Across the Specimen", for Air Infiltration & Exfiltration at 300Pa (6.27 psf) with result of maximum leakage ≤ 0.1 L/s/m² (0.01 cfm/ft²)
 ASTM E331-00(2016): "Standard Test Method for Water Penetration of Exterior Windows, Skylights, Doors, and Curtain Walls by Uniform Static Air Pressure Difference", for Water Penetration resistance at 720Pa (15.04 psf) with result of no leakage.

OPTIONS:

- | | | | |
|--|---|--|-------------------------------------|
| <input type="checkbox"/> LOCK | <input type="checkbox"/> SCREW TYPE | <input type="checkbox"/> MATERIAL | <input type="checkbox"/> FINISH |
| <input type="checkbox"/> CYLINDER LOCK AND KEY | <input type="checkbox"/> ALLEN HEAD SCREW | <input type="checkbox"/> STAINLESS STEEL | <input type="checkbox"/> MILD STEEL |
| | <input type="checkbox"/> SPANNER HEAD SCREW | <input type="checkbox"/> OTHER | <input type="checkbox"/> OTHER |
| | <input type="checkbox"/> OTHER | | |

JOB NAME:

APPROVED BY:

CUSTOMER:

DATE: