


VINYL FOUNDATION WEEP SCREED

FOR STUCCO AND PLASTER INSTALLATIONS

AMICO Vinyl Foundation Weep Screed provides a straight and true screed surface at the base of stucco walls while allowing moisture to escape the back of the stucco membrane.

Product Submittal	Product Number	Ground Description
	AMFWS-425-380	3/8"
	* AMFWS-425-500	1/2"
	* AMFWS-425-580	5/8"
	AMFWS-425-750	3/4"
	AMFWS-425-780	7/8"
Manufactured with a 3 1/2" Nailing Flange as Required by IBC 2510, 2511		
Overall Height of Weep Screed 4 1/4"		
Standard Length is 10-Feet		

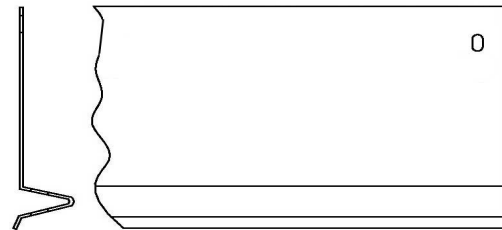

Vinyl Foundation Weep Screed

FINISH

The finish on all AMICO vinyl stucco accessories is compatible with standard lathing and paint finishes.

* COLORS

Standard color is white. This profile can be specified and ordered with the exposed area in tan, brown or gray.



tan

brown

gray

This bead is required by most building codes in the United States. Check with local building codes for the proper clearance for the weep screed placement above grade.

REFERENCES

PVC complies with ASTM D4316 and ASTM D1784

Meets IBC 2510 and IBC 2511

Refer to ASTM C1063 for support spacing, lath selection, fastener selection and further information regarding the proper installation of metal lath and accessories.

Meets Buy American Procurement Requirements

Made in the United States of America

LEED: 100% post industrial recyclable content

All butt joints, intersections, and ends should be joined, embedded and sealed in a quality sealant compatible with exterior paint finish.

All information contained herein is accurate as known at the time of publication. Specifications may change and AMICO reserves the right to change product specifications without notice and without incurring obligations.

ALABAMA METAL INDUSTRIES CORPORATION

3245 Fayette Avenue ♦ Birmingham, AL 35208 ♦ Telephone 800/366-2642

Facsimile 205/786-6527