


# METAL DIAMOND MESH LATH

## FLAT LATH

Manufactured from prime quality steel sheets that are slit and expanded to form small diamond shaped openings. This large number of openings provides more plaster keys, providing better scratch coat bonding in either pumped or troweled applications. Each sheet has square ends and smooth parallel edges on sides for fast, easy handling and bending for curved surfaces. G60 galvanized finish to ASTM A653 and ASTM C847.

Weight sq. yard	Finish	Sheet Weight	Nominal Sheet Size	Sheet/ bundle	Bundles/ Pallet	Pallet Weight	Part #
2.5 lbs.	Galvanized	5.0 lbs.	27" x 97"	10	50	2500 lbs.	L250FG2797
3.4 lbs.	Galvanized	6.8 lbs.	27" x 97"	10	50	3400 lbs.	L340FG2797
2.5 lbs.	Stainless 304*	5.0 lbs.	27" x 97"	10	10	500 lbs.	L250FSE2797
3.4 lbs.	Stainless 304*	6.8 lbs.	27" x 97"	10	10	680 lbs.	L340FSE2797
3.4 lbs.	Stainless 316*	6.8 lbs.	27" x 97"	10	10	680 lbs.	L340FSM2797

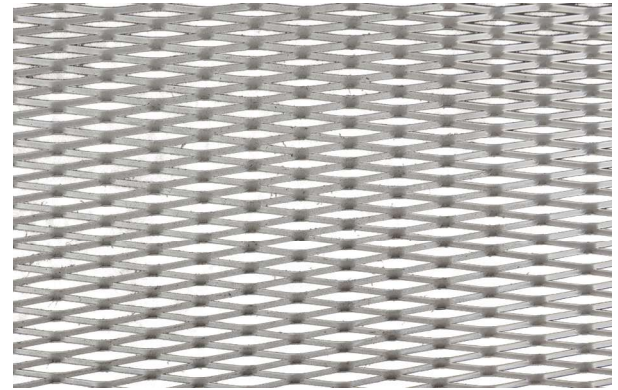

\*AMICO has added stainless steel lath to its industry-leading lath product offering, enabling architects, contractors, and customers of all sizes and scopes to order the maximum protection of stainless steel lath in a cost effective, timely manner.


## SELF-FURRED LATH

Used extensively in exterior stucco and stone work over sheathing and as a plaster base over masonry walls. Self-furring dimples or embossed "V"grooves hold the lath minimum 1/4" away from solid surfaces to aid in the keying of stucco to the lath. AMICO self-furred lath does not require additional self-furring mechanisms to function as required by ASTM C1063.

## DIMPLED LATH

(Dimple spacing 5 1/4" on length with offset rows 5 1/4" apart on

Weight sq. yard	Finish	Sheet Weight	Nominal Sheet Size	Sheet/ bundle	Bundles/ Pallet	Pallet Weight	Part #
2.5 lbs.	Galvanized	5.0 lbs.	27" x 97"	10	25	1250 lbs.	L250DG2797
3.4 lbs.	Galvanized	6.8 lbs.	27" x 97"	10	25	1700 lbs.	L340DG2797
2.5 lbs.	Stainless 304*	5.0 lbs.	27" x 97"	10	10	500 lbs.	L250DSE2797
3.4 lbs.	Stainless 304*	6.8 lbs.	27" x 97"	10	10	680 lbs.	L340DSE2797
3.4 lbs.	Stainless 316*	6.8 lbs.	27" x 97"	10	10	680 lbs.	L340DSM2797

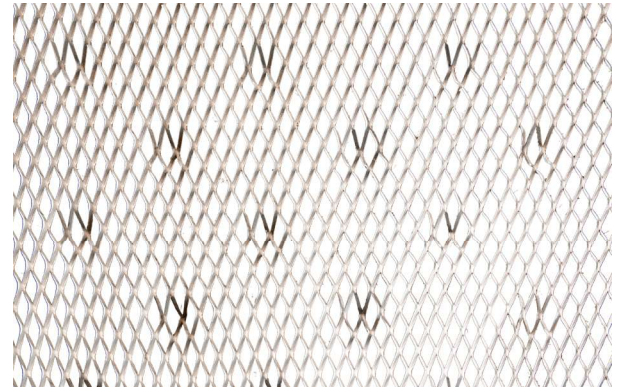

## V-GROOVED LATH

Weight sq. yard	Finish	Sheet Weight	Nominal Sheet Size	Sheet/ bundle	Bundles/ Pallet	Pallet Weight	Part #
2.5 lbs.	Galvanized	5.0 lbs.	27" x 97"	10	25	1250 lbs.	L250VGG2797
3.4 lbs.	Galvanized	6.8 lbs.	27" x 97"	10	25	1700 lbs.	L340VGG2797

As per current revisions of ASTM C1063, metal lath applied to solid substrates must have 1/4" self-furring properties, built into the lath sheet. Therefore, AMICO recommends the use of self-furred (SF) lath over solid substrates, as required by current codes. Self-furring lath is not required over framing members less than 1-5/8" wide or over open framing.

