


## X-2 REINFORCED CORNER BEAD Zinc Alloy 3 1/4" Expanded Metal Flanges


FOR STUCCO AND PLASTER INSTALLATIONS.  
This is a heavy reinforced metal corner bead for protecting exposed outside corners in commercial and institutional applications and providing a reliably straight ground for screeding. The 3 1/4" expanded mesh wings are reinforced with stiffener strips for added strength.

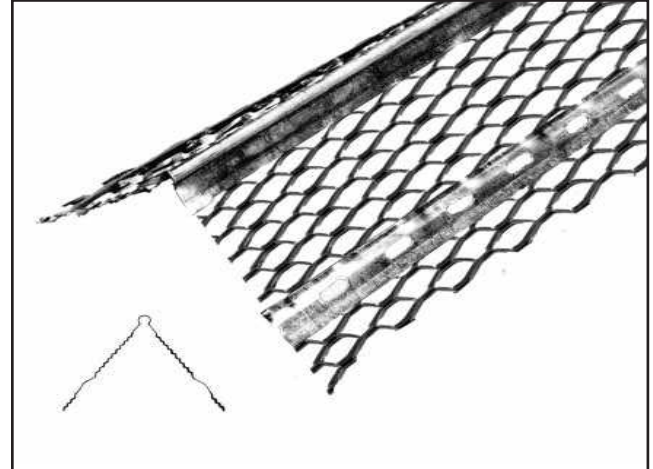

Submitted Product	Product Number	Product Dimensions
	X-2	3 1/4" x 3 1/4"
Standard Package Lengths are 10-ft.		

### DESCRIPTION

X-2 Corner Bead is known for its superior strength an external corner reinforcement accessory made by expanding metal and bent to reinforce portland cement stucco at external corners and to also establish grounds. X-2 Corner Beads for outside corners have a smooth round nose bead with Diamond Mesh wings for the keying of plaster right up to the nose of the bead.

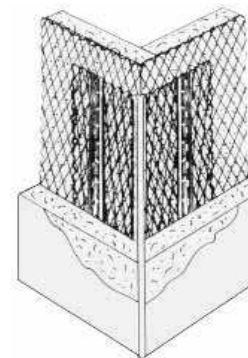

### Materials

Zinc Alloy

Refer to ASTM C1063 for support spacing, lath selection, fastener selection and further information regarding the proper installation of metal lath.

ASTM and most codes require hot dipped galvanized lath for all exterior applications.

Meets Buy American Procurement Requirements.  
Made in the United States of America

All information contained herein is accurate as known at the time of publication. Specifications may change and AMICO reserves the right to change product specifications without notice and without incurring obligations.

### ALABAMA METAL INDUSTRIES CORPORATION

3245 Fayette Avenue ♦ Birmingham, AL 35208 ♦ Telephone 800/366-2642 ♦ Facsimile 205/786-6527  
email [fmayer@gibraltar1.com](mailto:fmayer@gibraltar1.com)

