

CALLA®
Square Lay-in
smooth texture



CAD/Revit® drawings at:
armstrongceilings.com/cadrevit



DESIGNFlex®
A New World of Choice
for Ceiling Systems

plus capabilities
to do more



armstrongceilings.com/capabilities
See more photos at:
armstrongceilings.com/photogallery

▲ Calla® Square Lay-in panels with Prelude® XL® 15/16" suspension system

Smooth, drywall-like finish with both Sustain® and Total Acoustics® panel performance for flexible space;
Offers excellent noise reduction and sound blocking in one product.

KEY SELECTION ATTRIBUTES


- DesignFlex® options include made-to-order sizes and colors available to ship in 3 weeks
- Get total noise control and floor plan versatility with Total Acoustics® ceiling panels: NRC + CAC = Total Acoustics performance
- Calla® panels are part of the Sustain® portfolio, and meet the most stringent industry sustainability compliance standards today
- CleanAssure™ family of products – includes disinfectable panels, suspension systems, and trim
- Mold- and mildew-resistant surface
- Excellent combination of acoustical performance; NRC up to 0.90, and CAC 35
- USDA-Certified Biobased Product – 91%
- Washable, Scratch-resistant, Soil-resistant
- Product can be recycled through the Armstrong Ceilings Recycling Program
- Compatible with the TechZone® Ceiling Systems
- 30-Year Limited System Warranty against visible sag, mold, and mildew
- 10-Year replacement panel available for items 2820, 2821



COLORS Due to printing limitations, shade may vary from actual product.



These colors are pre-qualified to meet Sustain® portfolio requirements.

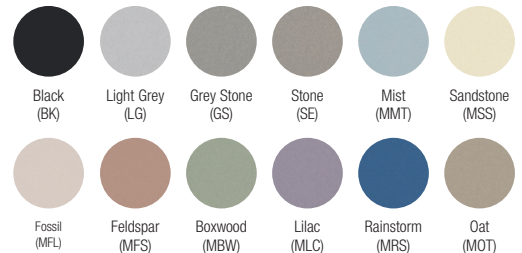

Other made-to-order colors must be evaluated if sustainability criteria is required. Lead time will increase.

DETAILS (Other Suspension Systems compatible. Refer to listing on next page.)



CALLA®

Square Lay-in
smooth texture

USDA
CERTIFIED
BIOBASED
PRODUCT
PRODUCT 91%

SUSTAIN®
High Performance
Sustainable Ceiling Systems

Declare.

GREENGUARD
Gold Certified
(details below)

LEED®
WELL™ | LBC

UP TO 76% RECYCLED
CONTENT


- energy management
- construction waste mgmt
- regional materials
- design for flexibility
- EPD
- recyclable/producer resp.
- biobased materials
- recycled content
- sourcing of raw materials
- material ingredient reporting
- low emitting materials
- lighting quality
- acoustics

Calculate sustainability with Green Genie™
armstrongceilings.com/greengenie

LOCATION DEPENDENT

VISUAL SELECTION

PERFORMANCE SELECTION Dots represent high level of performance.


armstrongceilings.com/suspdwgs	Susp. Dwg.	Item No.	Dimensions (Inches)	UL Classified Acoustics		Total Acoustics ¹ NRC CAC	Articulation Class AC	Fire Performance Class	Light Reflect* 0.85	Anti-Mold/Mildew	Sag Resistant	Certified Low VOC Emissions	CleanAssure™ Disinfectable Panels		DURABILITY				Recycle Program 30-Yr Warranty	
				NRC	CAC								Fog	Wash*	Impact	Scratch*	Soil			
CALLA® 15/16" Square Lay-in 	1	2820	24 x 24 x 1"	0.85	35	BEST ()))	170	Class A	0.85
		2820BK	24 x 24 x 1"	0.85	35	BEST ()))	170	Class A	N/A
		2821	24 x 48 x 1"	0.85	35	BEST ()))	170	Class A	0.85
		2821BK	24 x 48 x 1"	0.85	35	BEST ()))	170	Class A	N/A
		2854	30 x 30 x 1"	0.85	35	BEST ()))	170	Class A	0.85
		2857	24 x 60 x 1"	0.85	35	BEST ()))	170	Class A	0.85
		2864	24 x 72 x 1"	0.85	35	BEST ()))	170	Class A	0.85
Made-to-Order Sizes			Width 4" – 30"	Length 9" – 72"	N/A	N/A	N/A	Class A	0.85	

1 Ctn Min
FASTSIZE
3 WEEKS
order to ship

Visit the product page online and see "Configure an Item" to verify capabilities. Questions? email Techline@armstrongceilings.com

¹ Total Acoustics® ceiling panels have an ideal combination of sound absorption and sound blocking in one product. GOOD (NRC 0.60-0.65; CAC 35+) BETTER (NRC 0.70-0.75; CAC 35+) BEST (NRC 0.80+; CAC 35+)
* Advertised values for light reflectance, wash and scratch resistance are applicable to white tiles only

SUSPENSION SYSTEMS



Prelude® XL®

PHYSICAL DATA

Material
Wet-formed mineral fiber with acoustically transparent membrane

Surface Finish
Acoustically transparent membrane with factory-applied latex paint

Fire Performance
Class A: ASTM E84 and CAN/ULC S102 surface burning characteristics. Flame Spread Index of 25 or less. Smoke Developed Index of 50 or less (UL labeled).

ASTM E1264 Classification
Type IV, Form 2, Pattern E; Fire Class A

Humidity/Sag Resistance
HumiGuard® Plus ceiling panels are recommended for areas subject to high humidity, up to, but not including, standing water and outdoor applications.

Anti-Mold/Mildew
Ceiling tiles with BioBlock® performance resist the growth of mold and mildew on the tile surface.

VOC Emissions
GREENGUARD Gold Certified
Third-party certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.2, 2017. This standard is the guideline for low emissions in LEED®, WELL Building Standard™, Living Building Challenge® (LBC), CalGreen Title 24, ANSI/ASHRAE/USGBC/IES Standard 189; ANSI/GBI Green Building Assessment Protocol.

Design Considerations
Physical product samples for standard and custom colors are available upon request. Please refer to the physical product sample prior to making a final selection. While we strive to ensure exact color matches, various factors such as differences in materials, texture, substrate porosity, painting processes, lighting, and observer subjectivity can all affect how paint colors appear on ceiling and wall panels, suspension systems, and trim products. Due to these and other differences, ceiling and wall panels, trim products, and suspension systems with the same color name will coordinate but may not be an exact color match. Product is dye-lotted. Order sufficient initial quantities and attic stock to minimize possible color variation.

Acoustical Performance
CAC testing conducted using Prelude® XL® suspension system. NRC test conducted using white panels. Painted panels may experience a slight reduction in NRC due to the color painting process.



High Recycled Content
Classified as containing greater than 50% total recycled content. Total recycled content based on product composition of post-consumer and pre-consumer (post-industrial) recycled content per FTC guidelines.

Insulation Value
R Factor – 2.9 (BTU units)
R Factor – 0.445 (Watts units)

Cleaning and Disinfecting
Cleaning and CDC recommended disinfecting options available on armstrongceilings.com/cleaning

30-Year Performance Guarantee & Warranty
When installed with Armstrong® Suspension System. Details at armstrongceilings.com/warranty

Weight; Square Feet/Carton
2820, 2820BK – 1.0 lbs/SF; 40 SF/ctn
2821, 2821BK – 1.0 lbs/SF; 48 SF/ctn
2854 – 1.0 lbs/SF; 50 SF/ctn
2857 – 1.0 lbs/SF; 80 SF/ctn
2864 – 1.0 lbs/SF; 72 SF/ctn

Minimum Order Quantity
1 carton

MINERAL FIBER – Standard

