

CALLA®
Tegular
smooth texture



CAD/Revit® drawings at:
armstrongceilings.com/cadrevit



DESIGNFlex®
A New World of Choice
for Ceiling Systems

*Now available in
new nature-inspired
color palette*



▲ Calla® Square Tegular panels with Suprafine® 9/16" suspension system


Smooth, drywall-like finish with both Sustain® and Total Acoustics® panel performance for flexible spaces; Excellent noise reduction and sound blocking in one product.

KEY SELECTION ATTRIBUTES

- DesignFlex® options include shapes, made-to-order sizes, and colors available to ship in 3 weeks
- Get total noise control and floor plan versatility with Total Acoustics® ceiling panels: NRC + CAC = Total Acoustics performance
- Coordinating standard color collection available across materials including suspension systems, Axiom® trims, and Tectum® DesignArt™ ceiling and wall panels
- Calla® panels are part of the Sustain® portfolio, and meet the most stringent industry sustainability compliance standards today
- Excellent combination of acoustical performance; NRC up to 0.90, and CAC 35
- CleanAssure™ family of products – includes disinfectable panels, suspension systems, and trim
- Mold- and mildew-resistant surface
- USDA-Certified Biobased Product – 91%
- Washable, Impact-resistant, Scratch-resistant, Soil-resistant
- Product can be recycled through the Armstrong Ceilings Recycling Program
- Compatible with the TechZone® Ceiling Systems
- Available with factory-cut holes for USAI® trimless downlight fixture integration
- 30-Year Limited System Warranty against visible sag, mold, and mildew
- 10-Year replacement panel available for item 2824, 2822, 2825, 2823



COLORS Due to printing limitations, shade may vary from actual product.

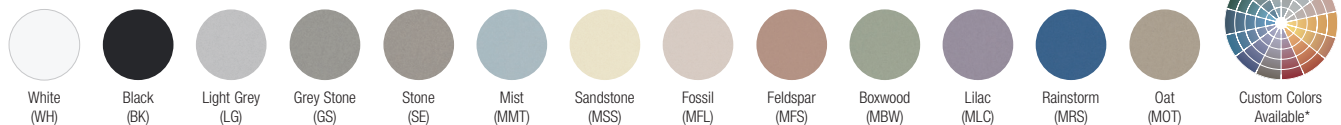

Standard colors are pre-qualified to meet Sustain® portfolio requirements. Custom colors may need to be evaluated if sustainability criteria is required.

DETAILS (Other Suspension Systems compatible. Refer to listing on next page.)



TechLine 877 276-7876
armstrongceilings.com/calla



CALLA®
Tegular
smooth texture

USDA
CERTIFIED
BIOBASED
PRODUCT
PRODUCT 91%

SUSTAIN®
High Performance
Sustainable Ceiling Systems

Declare.

GREENGUARD
Gold Certified
(details below)

LEED®
WELL™ LBC

UP TO 76% RECYCLED CONTENT

- energy management
- construction waste mgmt
- regional materials
- design for flexibility
- EPD
- recyclable/excise producer resp.
- biobased materials
- recycled content
- sourcing of raw materials
- material ingredient reporting
- low emitting materials
- lighting quality
- acoustics

Calculate sustainability with Green Genie™
armstrongceilings.com/greengenie

LOCATION DEPENDENT

VISUAL SELECTION

armstrongceilings.com/suspdwgs	Susp. Dwg.	Item No.	Dimensions (Inches)
CALLA® 15/16" Square Tegular		2822	24 x 24 x 1" □
		2822BK	24 x 24 x 1" □
		2823	24 x 48 x 1" □
		2823BK	24 x 48 x 1" □
		2855	30 x 30 x 1" □
		2858	24 x 60 x 1" □
		2865	24 x 72 x 1" □

1 Ctn Min
FASTSIZE
3 WEEKS
order to ship

Made-to-Order Sizes	Width	Length
	4" – 30"	9" – 72"


Visit the product page online and see "Configure an Item" to verify capabilities. Questions? email Techline@armstrongceilings.com

¹ Total Acoustics® ceiling panels have an ideal combination of sound absorption and sound blocking in one product.
GOOD (NRC 0.60-0.65; CAC 35+) BETTER (NRC 0.70-0.75; CAC 35+) BEST (NRC 0.80+; CAC 35+)
* Advertised values for light reflectance, wash and scratch resistance are applicable to white tiles only

PERFORMANCE SELECTION Dots represent high level of performance.

UL Classified Acoustics	Total Acoustics ¹	Articulation Class	Fire Performance	Light Reflect*	Anti-Mold/Mildew	Sag Resistant	Certified Low VOC Emissions	CleanAssure™ Disinfectable Panels	DURABILITY					
NRC + CAC	NRC CAC	AC	Class	Light	Mildew	Resistant	Low VOC	Fog	Wash*	Impact	Scratch*	Soil	Recycle Program	30-Yr Warranty
0.85 •	35 •	BEST ()))	170 •	Class A	0.85 •	•	•	•	•	•	•	•	•	•
0.85 •	35 •	BEST ()))	170 •	Class A	N/A	•	•	•	N/A	•	N/A	•	•	•
0.85 •	35 •	BEST ()))	170 •	Class A	0.85 •	•	•	•	•	•	•	•	•	•
0.85 •	35 •	BEST ()))	170 •	Class A	N/A	•	•	•	N/A	•	N/A	•	•	•
0.85 •	35 •	BEST ()))	170 •	Class A	0.85 •	•	•	•	•	•	•	•	•	•
0.85 •	35 •	BEST ()))	170 •	Class A	0.85 •	•	•	•	•	•	•	•	•	•
0.85 •	35 •	BEST ()))	170 •	Class A	0.85 •	•	•	•	•	•	•	•	•	•

SUSPENSION SYSTEMS



PHYSICAL DATA

Material
Wet-formed mineral fiber with acoustically transparent membrane

Surface Finish
Acoustically transparent membrane with factory-applied latex paint

Fire Performance
ASTM E84 and CAN/ULC S102 surface burning characteristics. Flame Spread Index of 25 or less. Smoke Developed Index of 50 or less (UL labeled).

ASTM E1264 Classification
Type IV, Form 2, Pattern E; Fire Class A

Humidity/Sag Resistance
HumiGuard® Plus ceiling panels are recommended for areas subject to high humidity, up to, but not including, standing water and outdoor applications.

Anti-Mold/Mildew
Ceiling tiles with BioBlock® performance resist the growth of mold and mildew on the tile surface.

VOC Emissions
GREENGUARD Gold Certified
Third-party certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.2, 2017. This standard is the guideline for low emissions in LEED®, WELL Building Standard™, Living Building Challenge® (LBC), CalGreen Title 24, ANSI/ASHRAE/USGBC/IES Standard 189; ANSI/GBI Green Building Assessment Protocol.

Design Considerations
Physical product samples for standard and custom colors are available upon request. Please refer to the physical product sample prior to making a final selection. While we strive to ensure exact color matches, various factors such as differences in materials, texture, substrate porosity, painting processes, lighting, and observer subjectivity can all affect how paint colors appear on ceiling and wall panels, suspension systems, and trim products. Due to these and other differences, ceiling and wall panels, trim products, and suspension systems with the same color name will coordinate but may not be an exact color match. Product is dye-lotted. Order sufficient initial quantities and attic stock to minimize possible color variation.

PRODUCT CERTIFIED FOR LOW CHEMICAL EMISSIONS
UL.COM/GG
UL 2818



High Recycled Content
Classified as containing greater than 50% total recycled content. Total recycled content based on product composition of post-consumer and pre-consumer (post-industrial) recycled content per FTC guidelines.

Insulation Value
R Factor – 2.9 (BTU units)
R Factor – 0.445 (Watts units)

Cleaning and Disinfecting
Cleaning and CDC recommended disinfecting options available on armstrongceilings.com/cleaning

30-Year Performance Guarantee & Warranty
When installed with Armstrong® Suspension System. Details at armstrongceilings.com/warranty

Weight; Square Feet/Carton
2822, 2822BK – 1.0 lbs/SF; 40 SF/ctn
2823, 2823BK – 1.0 lbs/SF; 48 SF/ctn
2855 – 1.0 lbs/SF; 50 SF/ctn
2858 – 1.0 lbs/SF; 80 SF/ctn
2865 – 1.0 lbs/SF; 72 SF/ctn

Minimum Order Quantity
1 carton

TechLine 877 276-7876
armstrongceilings.com/calla



MINERAL FIBER – Standard



CALLA®

Tegular
smooth texture



GREENGUARD
Gold Certified
(details below)



LEED® WELL™ LBC

UP TO **76%** RECYCLED CONTENT

- energy management
- construction waste mgmt
- regional materials
- design for flexibility
- EPD
- recyclable/extended producer resp.
- biobased materials
- recycled content
- sourcing of raw materials
- material ingredient reporting
- low emitting materials
- lighting quality
- acoustics

Calculate sustainability with Green Genie™
armstrongceilings.com/greengenie

LOCATION DEPENDENT

VISUAL SELECTION

armstrongceilings.com/suspdwgs	Susp. Dwg.	Item No.	Dimensions (Inches)
CALLA® 9/16" Square Tegular		2824	24 x 24 x 1"
		2825	24 x 48 x 1"
		2825BK	24 x 48 x 1"
		2856	30 x 30 x 1"
		2859	24 x 60 x 1"
		2866	24 x 72 x 1"

1" Thick – 9/16" Square Tegular

Made-to-Order Sizes	Width	Length
	4" – 30"	9" – 72"

1 Ctn Min
FASTSIZE
3 WEEKS
order to ship

Visit the product page online and see "Configure an Item" to verify capabilities. Questions? email Techline@armstrongceilings.com

PERFORMANCE SELECTION


Dots represent high level of performance.

UL Classified Acoustics	Total Acoustics ¹	Articulation Class	Fire Performance	Light Reflect*	Anti-Mold/Mildew	Sag Resistant	Certified Low VOC Emissions	CleanAssure™ Disinfectable Panels	DURABILITY					
NRC + CAC	NRC CAC	AC	Class	Reflect*	Mildew	Resistant	VOC	Fog	Wash*	Impact	Scratch*	Soil	Recycle Program	30-Yr Warranty
0.85	35	BEST	170 Class A	0.85	•	•	•	•	•	•	•	•	•	•
0.85	35	BEST	170 Class A	0.85	•	•	•	•	•	•	•	•	•	•
0.85	35	BEST	170 Class A	0.85	•	•	•	•	N/A	•	N/A	•	•	•
0.85	35	BEST	170 Class A	0.85	•	•	•	•	•	•	•	•	•	•
0.85	35	BEST	170 Class A	0.85	•	•	•	•	•	•	•	•	•	•
0.85	35	BEST	170 Class A	0.85	•	•	•	•	•	•	•	•	•	•

¹ Total Acoustics® ceiling panels have an ideal combination of sound absorption and sound blocking in one product. **GOOD** (NRC 0.60-0.65; CAC 35+) **BETTER** (NRC 0.70-0.75; CAC 35+) **BEST** (NRC 0.80+; CAC 35+)
* Advertised values for light reflectance, wash and scratch resistance are applicable to white tiles only

When specifying or ordering, please include color suffix (e.g., 2824 B K - 9/16" Square Tegular, 24" x 24" in Black):
White (WH) Black (BK) Feldspar (MFS) Rainstorm (MRS)
Light Grey (LG) Oat (MOT) Lilac (MLC)
Grey Stone (GS) Sandstone (MSS) Boxwood (MBW)
Stone (SE) Fossil (MFL) Mist (MMT)

SUSPENSION SYSTEMS



PHYSICAL DATA

Material
Wet-formed mineral fiber with acoustically transparent membrane

Surface Finish
Acoustically transparent membrane with factory-applied latex paint

Fire Performance
Class A: ASTM E84 and CAN/ULC S102 surface burning characteristics. Flame Spread Index of 25 or less. Smoke Developed Index of 50 or less (UL labeled).

ASTM E1264 Classification
Type IV, Form 2, Pattern E; Fire Class A

Humidity/Sag Resistance
HumiGuard® Plus ceiling panels are recommended for areas subject to high humidity, up to, but not including, standing water and outdoor applications.

Anti-Mold/Mildew
Ceiling panels with BioBlock® performance resist the growth of mold and mildew on the panel surface.

VOC Emissions
GREENGUARD Gold Certified
Third-party certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.2, 2017. This standard is the guideline for low emissions in LEED®, WELL Building Standard™, Living Building Challenge® (LBC), CalGreen Title 24, ANSI/ASHRAE/USGBC/IES Standard 189; ANSI/GBI Green Building Assessment Protocol.



Design Considerations
Physical product samples for standard and custom colors are available upon request. Please refer to the physical product sample prior to making a final selection. While we strive to ensure exact color matches, various factors such as differences in materials, texture, substrate porosity, painting processes, lighting, and observer subjectivity can all affect how paint colors appear on ceiling and wall panels, suspension systems, and trim products. Due to these and other differences, ceiling and wall panels, trim products, and suspension systems with the same color name will coordinate but may not be an exact color match. Product is dye-lotted. Order sufficient initial quantities and attic stock to minimize possible color variation.

Acoustical Performance
CAC testing conducted using Prelude® XL® suspension system for 15/16" edge detail and Silhouette® suspension system for 9/16" edge detail. NRC test conducted using white panels. Painted panels may experience a slight reduction in NRC due to the color painting process.

High Recycled Content
Classified as containing greater than 50% total recycled content. Total recycled content based on product composition of post-consumer and pre-consumer (post-industrial) recycled content per FTC guidelines.

Insulation Value
R Factor – 2.9 (BTU units)
R Factor – 0.445 (Watts units)

Cleaning and Disinfecting
Cleaning and CDC recommended disinfecting options available on armstrongceilings.com/cleaning

30-Year Performance Guarantee & Warranty
When installed with Armstrong® Suspension System. Details at armstrongceilings.com/warranty

Weight; Square Feet/Carton
2824 _____ – 1.0 lbs/SF; 40 SF/ctn
2825, 2825BK – 1.0 lbs/SF; 48 SF/ctn
2856 – 1.0 lbs/SF; 50 SF/ctn
2859 – 1.0 lbs/SF; 80 SF/ctn
2866 – 1.0 lbs/SF; 72 SF/ctn

Minimum Order Quantity
1 carton



MINERAL FIBER – Standard