

# SOUNDSCAPES® Blades

Linear Acoustical Wall Panels  
fine texture



**FAST134**  
Select Items Ship Fast  
armstrongceilings.com/fast134



SoundScapes® Blades wall panels in Riverstone (DRV), and SoundScapes Blades wave designs in Mist (DMT) and Rainstorm (DRS)

CAD/Revit® drawings at:  
armstrongceilings.com/cadrevit



Ceiling application

Linear acoustical panels help reduce reverberation time in your space.

## KEY SELECTION ATTRIBUTES




- Now available in 15 colors inspired by nature
- Direct attach to wall using Axiom® Wall Molding
- White embedded hanging clips
- Sound absorption up to 0.80 NRC dependent on blade spacing
- Custom panel options available
- Select products included in the FAST134 program – ready to ship in 4 weeks or less. See up-to-date lead times at [armstrongceilings.com/fast134](http://armstrongceilings.com/fast134)
- Made in the U.S.A. of domestic and global content
- Build America, Buy America (BABA) Act compliant


**COLORS** Due to printing limitations, shade may vary from actual product.



Painted

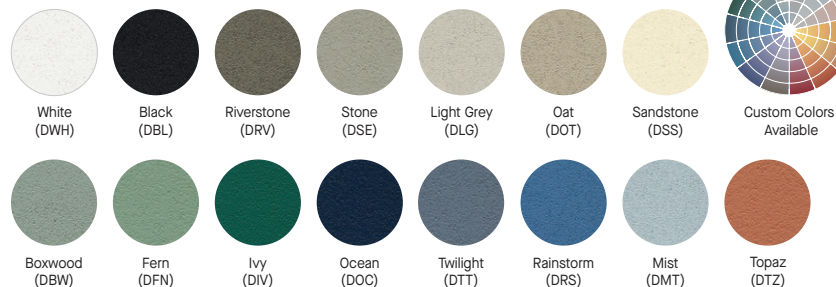

For premium and custom capabilities, contact [ASQuote@armstrongceilings.com](mailto:ASQuote@armstrongceilings.com)

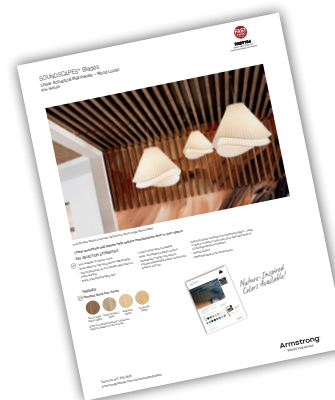

*Wood Looks Available!*

# SOUNDSCAPES® Blades

Linear Acoustical Wall Panels  
fine texture

LEED® WELL LBC

43% RECYCLED CONTENT

For LEED contribution contact TechLine

energy management

construction waste mgmt

regional materials

design for flexibility

EPD

recyclable/pre-processed materials

biobased materials

recycled content

sourcing of raw materials

material ingredient reporting

low emitting materials

lighting quality

acoustics

LOCATION DEPENDENT

## VISUAL SELECTION

Shown in elevation view

Item No. ♦	Description	Dimensions (Inches)
SOUNDSCAPES® Blades 8250F03RH05_ _ _ (formerly item no. 7190)	Rectangular Vertical Panel	5 × 46 × 2" 
8250F03RH06_ _ _ (formerly item no. 7191)	Rectangular Vertical Panel	5 × 94 × 2" 

FAST  
4 WEEKS  
or Less

FAST134 program items ready to ship from manufacturer in 4 weeks or less.  
Up-to-date lead times and product options (sizes and colors) at [armstrongceilings.com/fast134](https://armstrongceilings.com/fast134)

NOTE: Scrimmed top edges offered as "Premium."  
♦ Add 3-letter color suffix to end of item number (e.g., 8250F03RH05 D W H = White)

## ACOUSTIC INFORMATION


	6" O.C.	12" O.C.	18" O.C.	24" O.C.
Panel Depth 5"	0.80	0.50	0.40	0.30

NOTE: Tested per ASTM C423 without infill panels. Spacing of blades, blade depth, and acoustical infill panels will impact acoustical performance. Contact TechLine for a custom reverberation time report at [techline@armstrongceilings.com](mailto:techline@armstrongceilings.com)

## INSTALLATION OPTIONS

Item No. ♦	Description	PCS/CTN
Direct-Attach with Axiom® Wall Molding AXM34STR3_ _ _	10' Straight Wall Molding (360° Paint Recommended; order by the piece)	

♦ When specifying or ordering items with a color, add the two-letter suffix to the end of the item number (e.g. AXM34STR3 B L)

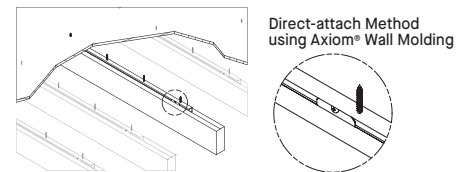

## PHYSICAL DATA

**Material**  
2" thick fiberglass with DuraBrite® scrim on face and sides.

**Surface Finish**  
Colors: DuraBrite scrim with factory-applied paint on face and sides. Standard White has energy-saving, high light-reflective finish (LR 0.86). Top of panel is unfinished with white embedded hanging clips.

**Fire Performance**  
SoundScapes® Blades panel material is ASTM E84 Class A: Flame Spread 25 or under and Smoke Developed 50 or less.

CAN/ULC S102 surface burning characteristics.  
Flame Spread Rating 25 or less. Smoke Developed Classification 50 or less.

**Design Support**  
For custom design assistance contact ProjectWorks® Design Services or visit [armstrongceilings.com/projectworks](https://armstrongceilings.com/projectworks)

**Anti-Mold/Mildew**  
Ceiling tiles with BioBlock® performance resist the growth of mold and mildew on the tile surface.

**Design Considerations**  
SoundScapes Blades panels maintain a natural bow that may be noticeable when installed 2" or less apart.

Special care in installation and handling must be taken with color panels to avoid surface damage to the paint finish. Custom colors are available.

5" SoundScapes Blades can now be used on walls, but are not recommended for use in high-traffic or high-impact areas. For best results, install above 7" from floor level.

SoundScapes Blades panels can be ordered with scrim on top edge as a premium.

**Seismic Restraint**  
SoundScapes Blades are approved for all seismic areas when installed per the seismic guidelines in the Armstrong Ceilings installation instructions.

**FAST134 Program Considerations**  
Size of Job Matters: Big jobs, over 2500 SF or 50 pieces for shapes/vertical elements will have longer lead times.

Location Matters: Transit time not included. We are ready to ship in 1 week on FAST1 items. However, transit to the states west of Wyoming may add time.

Distributor Truck Schedule Matters: We rely on distribution to help move products around the country. When speed matters, work with your local distributor to ensure FAST134 service.

Stock vs Made-to-Order Matters: FAST3 & FAST4 items are made-to-order and will ship direct to distributor. FAST1 (stocked items) will go through distribution and depend on distributor truck schedules.

**Warranty**  
Details at [armstrongceilings.com/warranty](https://armstrongceilings.com/warranty)

**Panel Weight**  
8250F03RH05 – 2.2 LBS per panel  
8250F03RH06 – 4.3 LBS per panel

**Panels/ Carton**  
4

**Minimum Order Quantity**  
1 carton

