

ATLAS® ROLL ROOFING PRODUCTS


**WORLD'S LARGEST PRODUCER OF
ROOFING UNDERLAYMENTS**



DATA SHEET

PREFERRED BY ROOFING PROFESSIONALS.

Atlas has you covered on every part of the job, even what goes under your roofing. We are proud to offer the largest and most innovative variety of premium underlayment and roll-roofing products. They are manufactured to ensure easy installation as well as to perfectly complement virtually all roofing systems.

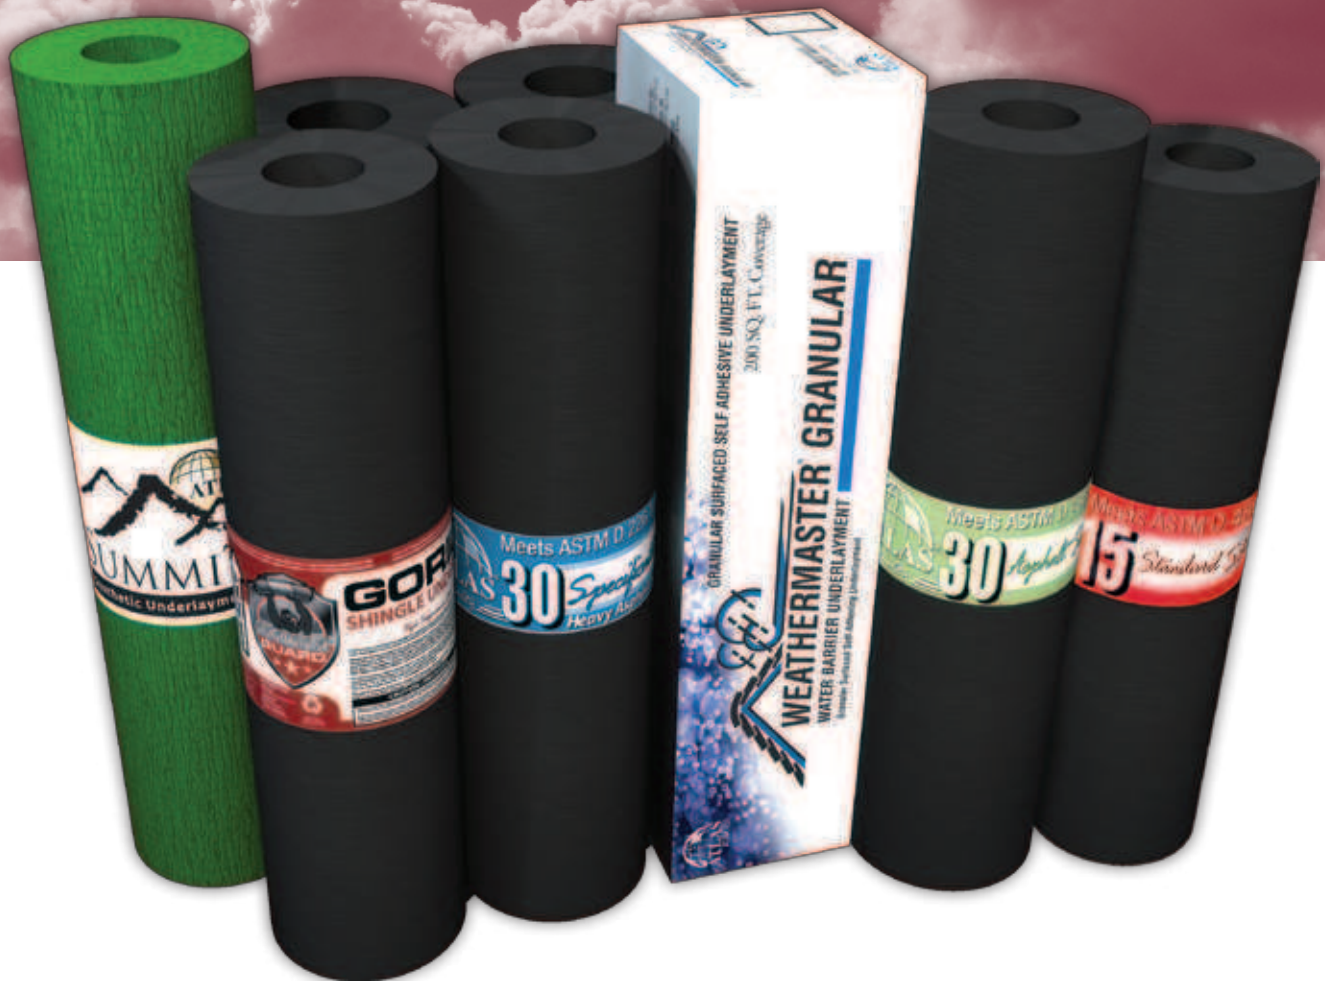

CORPORATE SALES & MARKETING
2000 RiverEdge Parkway, Suite 800
Atlanta, Georgia 30328

www.ATLASROOFING.com

SALES OFFICES

Ardmore, OK
(800) 261-2852
FAX (580) 223-6894

Daingerfield, TX
(800) 270-2852
FAX (903) 645-2291

Franklin, OH
(800) 260-2852
FAX (937) 746-6040

Hampton, GA
(800) 251-2852
FAX (770) 946-5249

Meridian, MS
(800) 933-2721
FAX (601) 483-7344



Made in U.S.A.



Atlas offers homeowners double the coverage of their Premium Protection Period on any Atlas Signature Select® Roofing System. This product qualifies for use in the Atlas Signature Select® Roofing System when used in combination with other qualifying Atlas products. For more information please visit: www.AtlasSignatureSelect.com



DATA SHEET

ROOFING UNDERLAYMENT

Product	ASTM	Codes and Compliances	Description	Width	Length	Approx. Roll Coverage	
Asphalt Roll Roofing							
#90 Mineral Surface Roll Roofing	—	Florida Building Code Approved	Miami-Dade County Compliance Req.	The top surface of this organic-based roll is imbedded with mineral granules. Can be used alone as a primary roof covering.	36"	36'	1
		FL 11915	N/A				
Slate/Tile Underlayment	D-6380 Class M	FL 11915	N/A	Premium Slate Granule Surfaced Tile Underlayment Organic Felt Based	36"	36'	1
Standard Asphalt Saturated Organic Felt							
#15 Saturated Felt	D-4869 Type I	FL 11915	N/A	Standard Shingle Underlayment Saturated Felt	36"	144'	4
#30 Saturated Felt	D-4869 Type III	FL 11915	N/A	Heavy Shingle Underlayment Saturated Felt	36"	72'	2
Specification Asphalt Saturated Organic Felt							
#15 Specification Felt	D-4869 Type II	FL 11915	N/A	Specification Shingle Underlayment Saturated Felt	36"	144'	4
#15 Specification Felt, Perforated	D-4869 Type II	FL 11915	N/A	Specification Perforated Shingle Underlayment Saturated Felt	36"	144'	4
#30 Specification Felt	D-4869 Type IV	FL 11915	N/A	Specification Shingle Underlayment Saturated Felt	36"	72'	2
	D-226						
Split and Jumbo Rolls - Asphalt Saturated Organic Felt							
#30 Standard, Split Rolls - 18" x 72' Master Roll = 2 Split Rolls	D-4869 Type III	FL 11915	N/A	Wood Shake Shingle Underlayment 36" Perforated and Split at 18" Saturated Felt	36"	72'	2
#30 Jumbo, 18" x 120' Shake Felt Underlayment (Split Rolls)	D-4869 Type III	FL 11915	N/A	Wood Shake Shingle Underlayment 36" Perforated and Split at 18" Saturated Felt	36"	120'	1.66
Glass Fiber Reinforced Asphalt Saturated Felt							
Gorilla Guard®	D-6757	FL 11915	N/A	Premium Glass Reinforced Shingle Underlayment	36"	141.5'	4
Synthetic Shingle Underlayment							
Summit®	D-6757	FL 11915	NOA No. 07.927.05	Light Weight, Extremely Strong, Woven Polypropylene Fabric with UV & Water Resistive Coatings, 6 Month Exposure, Synthetic Shingle Underlayment	48"	250'	10
Modified Bitumen Roll Roofing							
WeatherMaster® Granular	D-1970	FL 11915	NOA No. 08-1006.03	Granular Surfaced Peel & Stick SBS Reinforced Underlayment	36"	33.3'	1
					36"	72.1'	2
WeatherMaster® PolySeal	D-1970	FL 11915	NOA No. 08-1006.03	Peel & Stick, Polysurfaced, High temp, SBS Modified Asphalt Roof Underlayment	36"	66.6'	2
WeatherMaster® TU Ultra	D-1970	FL 11915	NOA No. 08-0108.03	Peel & Stick, Woven Polyester Surfaced SBS, Heavy Tile Underlayment	36"	66.6'	2
Shingle Starter Products							
Starter Strip With Sealant	D-3462	N/A	N/A	Asphalt coated, Glass mat Reinforced Shingle Starter Strips	7"	36"	120 Lineal Ft.
					10"	22 11/16"	79 Lineal Ft.
					12"	36"	42 Lineal Ft.

