

Neoprene Sponge Rubber Joint Material

Description:

BoMetals Supply of Sponge Rubber Joint Material is a Closed Cell Neoprene Sponge expansion joint filler. It is the ultimate solution for masonry expansion joints for brick and block. **Sponge Rubber Joint Material** meets and exceeds all ASTM D 1056 specifications for Closed Cell Sponge Neoprene expansion joints in residential, commercial, and industrial applications. Neoprene Sponge Rubber is available in multiple densities/types to meet a wide range of specifications


Use:

BoMetals Supply of Sponge Rubber Joint Material helps prevent clogging of expansion joint with mortar and is the accepted material for brick and block expansion joint fillers. It can be used in almost any residential, commercial or industrial application.

BoMetals Supply of Sponge Rubber Joint Material can be custom cut for your jobsite needs and is available with or without PSA (Pressure Sensitive Adhesive).

Features:

- **Sponge Rubber Joint Material** – A high quality, closed cell Neoprene Sponge Rubber
- **Flexibility** – Will not break or crack when used in masonry joints
- **Accepted** – Currently used by both residential and commercial contractors
- **PSA** – Available with or without Pressure Sensitive Adhesive
- **Economical** – Easily cut and handled on any jobsite, and available in 50' rolls or flat strips

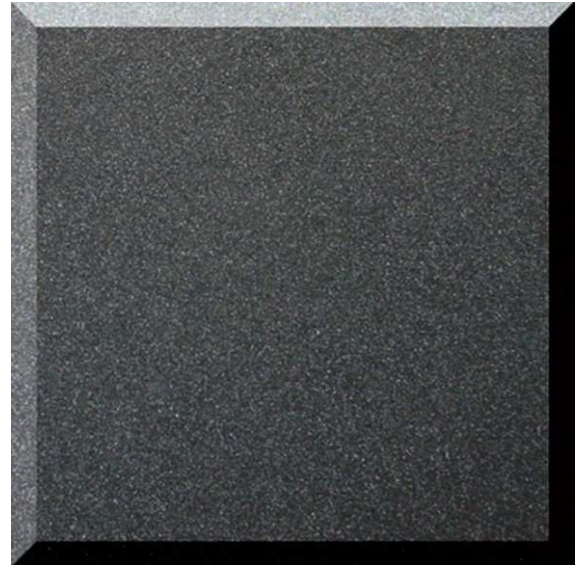

Sponge Rubber Joint Material	
Color	Black
Density, Apr. (lbs/ft ³)	4.5 PCF
Polymer	Neoprene /SBR
SAE J18 July 92	2A1
ASTM D-1056-67	SCE 41
ASTM D-1056-68 & 78	RE 41
ASTM D-1056-85, 91, 98 & 00	2A1
Compression Deflection 25% PSI Compression Varies with thickness	2 – 5 PSI
Water Absorption by weight Max ASTM Method D 1056	5% (10% Allowed)
Flame Resistance FMVSS302	Pass

***Multiple Densities/Types available. Please inquire about availability and job specification