



Expanding Your Solutions

**Corporate Headquarters**  
13191 Crossroads Pkwy N., Ste 325  
City of Industry, CA 91746  
Phone: 800.775.2362  
Fax: 626.330.7598

**Manufacturing Facilities**  
City of Industry, CA  
Commerce City, CO  
Ft. Worth, TX  
Pittsburg, CA

**Structural Engineering/Design**  
1001-A Pittsburgh Antioch Hwy  
Pittsburg, CA 94565  
Phone: 800.775.2362  
Fax: 626.330.7598

**Technical Services**  
13191 Crossroads Pkwy N., Ste 325  
City of Industry, CA 91746  
Phone: 800.416.2278  
Fax: 626.249.5004

## 3/8" SELF-FURRED RIB LATH WITHOUT PAPER

### Introduction

CEMCO's 3/8" Hi-Rib Lath is the most rigid of all metal laths. With full 3/8" ribs longitudinally spaced at 4" apart. Hi-Rib lath is able to span up to 24" on center. This lath can be used in both vertical and horizontal applications. Please consult CEMCO's Technical Services for specifics. All CEMCO expanded metal lath is produced from standard G60 hot-dipped galvanized steel. G90 is available upon special request.

### Packaging

| Product Code | Sheet Size | Pieces/Bundle | Weight/Sq. Yd. (lbs.) | Yards/Bundle | Yards/Pallet | Bundle/Pallet |
|--------------|------------|---------------|-----------------------|--------------|--------------|---------------|
| RG8          | 27" x 97"  | 10            | 3.4                   | 20           | 1000         | 50            |

### ASTM's & Code Standards


- ASTM A653
- ASTM C841 (Installation)
- ASTM C847
- ASTM A924
- ASTM C1063 (Installation)
- IBC/IRC: 2024
- CBC/CRC: 2022
- ICC ESR-1623
- ANSI A42.3, ANSI A42.4
- U.S. HUD 4930.1

### LEED v4 for Building and Design Construction

- MR Prerequisite: Construction and Demolition Waste Management Planning.
- MR Credit: Construction and Demolition Waste Management.
- MR Credit: Building Product Disclosure and Optimization – Sourcing of Raw Materials, Option 2.
- MR Credit: Building Product Disclosure and Optimization – Environmental Product Declarations, Options 1 & 2.
- MR Credit: Building Product Disclosure and Optimization – Material Ingredients, Option 1.
- MR Credit: Building Life-Cycle Impact Reduction, Option 4.

### CEMCO cold-formed steel framing products contain 30% to 37% recycled steel.

- Total Recycled Content: 36.9%
- Post-Consumer: 19.8%
- Pre-Consumer: 14.4%

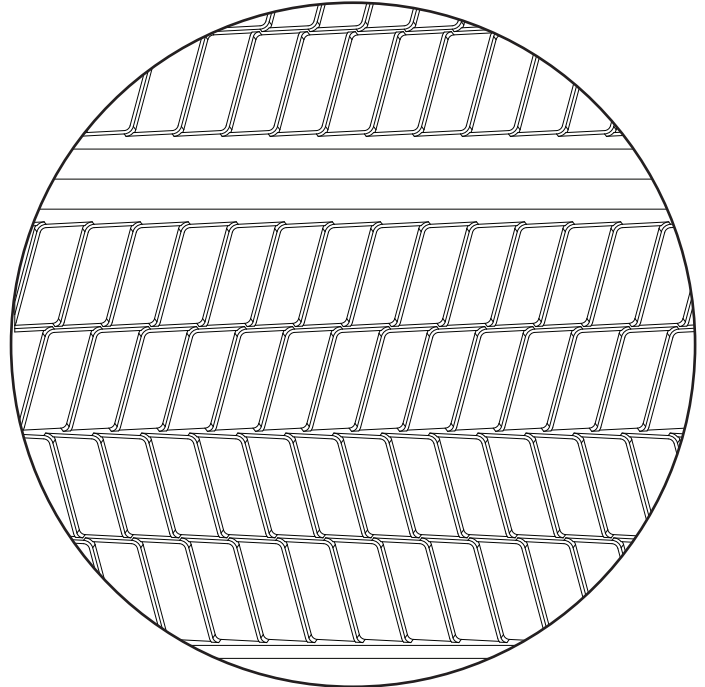


TOP DETAIL

PROFILE



PROFILE  
DETAIL

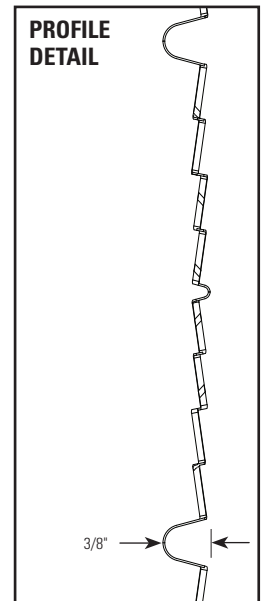

### Technical Services

Technical Services: 800.416.2278  
Structural Engineering/Design: 925.473.9340  
www.cemcosteel.com



This technical information reflects the most current information available and supersedes any and all previous publications effective January 09, 2026.