


# 9/16" EZ Stab Elite Narrow System

The slim face width complements modern design and offers flexibility and added strength.


## Features & Benefits

- Increased frequency (3" O.C.) of patented Latitude Holes™ provides installation flexibility
- Narrow style 9/16" (15 mm) face integrates with narrow reveal edge panels
- EZ Stab clip technology allows for a fast and strong connection on cross tees with enhanced removability
- Centering tabs prevent gaps around the edge, enabling integration with trim edge panels
- Enhanced stitching increases stiffness, reducing bending or twisting
- Suitable for all seismic applications
- ICC certified (ESR-3336) and City of Los Angeles Building Code compliant via ESR-3336 LABC Supplement
- Grid features G30 hot-dipped galvanized steel web construction for corrosion resistance
- Intermediate- and heavy-duty load-bearing capabilities/classification
- Available in Standard White and Black. Additional color options are offered through our Post-Paint process.
- Build America, Buy America (BABA) options available


## Main Runner

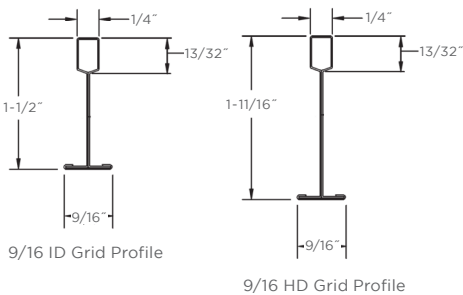

## Wall Angle

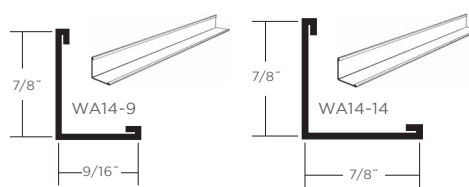

## Shadow Molding

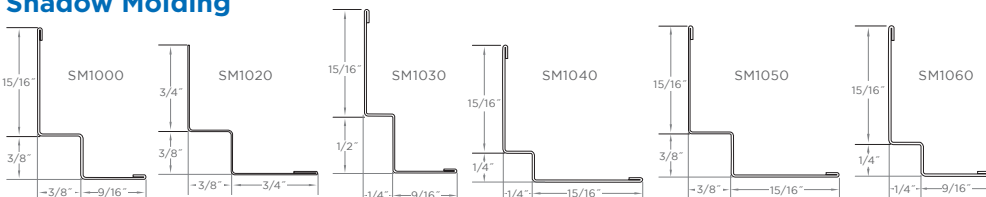

## LEED® v4

RECYCLED CONTENT	up to 60%
------------------	-----------

- ✓ MR: PBT Source Reduction (Healthcare)
- ✓ MR: Material Ingredients (HPDs)
- ✓ EQ: Low-Emitting Material
- ✓ MR: Sourcing Raw Materials
- ✓ MR: Environmental Product Declarations (EPDs)
- ✓ MR: Construction and Demolition Waste Management Planning

LEED® is a registered trademark of the U.S. Green Building Council.

## CERTIFICATIONS & PRODUCT DECLARATIONS



EPD AVAILABLE



HPD AVAILABLE

**Declare**<sup>SM</sup>  
Living Building Challenge Red List Free<sup>®</sup>



BABA OPTIONS



# 9/16" EZ Stab Elite Narrow System

	GRID FACE (IN.)	DIMENSIONS (IN.)	SLOT SPACING (IN.)	PIECES/CARTON	FT./CARTON	SEISMIC DESIGN CATEGORY	STRUCTURAL CLASSIFICATION (ASTM C635)	RECYCLED CONTENT PRE*	RECYCLED CONTENT POST*	RECYCLED CONTENT TOTAL*	ALLOWABLE UNIFORM LOAD (PLF)	ALLOWABLE CONCENTRATED LOAD AT MIDSPAN (LBF)**
<b>Main Runners</b>												
EZES12-12-18	9/16	144 x 1-1/2 x 9/16	6 O.C.	20	240	A-C	ID	25%	35%	60%	13.15	32.88
EZES12-12-19	9/16	144 x 1-11/16 x 9/16	6 O.C.	20	240	A-F	HD	25%	34%	59%	17.97	44.93
<b>Cross Tee</b>												
EZES0.33-12-12	9/16	4 x 1-1/2 x 9/16	—	60	20	—	—	25%	34%	39%	—	—
EZES0.5-12-12	9/16	6 x 1-1/2 x 9/16	—	60	30	—	—	25%	34%	39%	—	—
EZES1-12-12	9/16	12 x 1-1/2 x 9/16	—	60	60	—	—	25%	34%	59%	210.53	131.58
EZES2-12-12	9/16	24 x 1-1/2 x 9/16	—	60	120	—	—	24%	36%	60%	27.97	34.96
EZES2-12-19	9/16	24 x 1-11/16 x 9/16	—	60	120	—	HD	25%	34%	59%	50.00	62.50
EZES2.5-12-12	9/16	30 x 1-1/2 x 9/16	—	60	150	—	—	24%	36%	60%	—	—
EZES4-12-12	9/16	48 x 1-1/2 x 9/16	12 O.C.	60	240	—	—	24%	36%	60%	8.44	21.09
EZES4-12-19	9/16	48 x 1-11/16 x 9/16	12 O.C.	60	240	—	HD	25%	34%	59%	17.97	44.93
EZES5-12-12	9/16	60 x 1-1/2 x 9/16	12 O.C.	20	100	—	—	24%	36%	60%	4.44	13.88
EZES5-12-12-5s	9/16	60 x 1-1/2 x 9/16	6, 20, 30, 40, 54	20	100	—	—	24%	36%	60%	—	—
EZES6-12-12	9/16	72 x 1-1/2 x 9/16	12 O.C.	20	120	—	—	24%	36%	60%	2.76	10.35
EZES8-12-12	9/16	96 x 1-1/2 x 9/16	12 O.C.	20	160	—	—	24%	36%	60%	1.00	5.00
<b>Wall Angle</b>												
WA14-9	9/16	144 x 7/8 x 9/16	—	40	480	—	—	19%	69%	88%	—	—
WA14-14	7/8	144 x 7/8 x 7/8	—	40	480	—	—	19%	69%	88%	—	—
WA14-14-10	7/8	120 x 7/8 x 7/8	—	40	400	—	—	19%	69%	88%	—	—
WA32-32	2	120 x 2 x 2	—	20	200	—	—	19%	69%	88%	—	—
WA32-32-12	2	144 x 2 x 2	—	20	240	—	—	19%	69%	88%	—	—
WA32-15	2	120 x 15/16 x 2	—	20	200	—	—	19%	69%	88%	—	—
WA32-15-12	2	144 x 15/16 x 2	—	20	240	—	—	19%	69%	88%	—	—
<b>Flexible Wall Angle*</b>												
FWA14-9	9/16	96 x 1-1/8 x 9/16	—	63	504	—	—	19%	69%	88%	—	—
FWA14-14	7/8	96 x 1-1/8 x 7/8	—	63	504	—	—	19%	69%	88%	—	—
*Flexible Wall Angle is made of Rigid PVC												
<b>Shadow Molding</b>												
SM1000	—	120 x 15/16 x 3/8 x 3/8 x 9/16	—	40	400	—	—	19%	69%	88%	—	—
SM1020+	—	120 x 3/4 x 3/8 x 3/8 x 3/4	—	40	400	—	—	19%	69%	88%	—	—
SM1030	—	120 x 15/16 x 1/2 x 1/4 x 9/16	—	40	400	—	—	9%	44%	53%	—	—
SM1040	—	120 x 15/16 x 1/4 x 1/4 x 15/16	—	40	400	—	—	9%	44%	53%	—	—
SM1050	—	120 x 15/16 x 3/8 x 3/8 x 15/16	—	40	400	—	—	9%	44%	53%	—	—
SM1060	—	120 x 15/16 x 1/4 x 1/4 x 9/16	—	40	400	—	—	9%	44%	53%	—	—

	GRID FACE (MM)	DIMENSIONS (MM)	SLOT SPACING (MM)	PIECES/CARTON	FT./CARTON	SEISMIC DESIGN CATEGORY	STRUCTURAL CLASSIFICATION (ASTM C635)	RECYCLED CONTENT PRE*	RECYCLED CONTENT POST*	RECYCLED CONTENT TOTAL*	ALLOWABLE UNIFORM LOAD (PLF)	ALLOWABLE CONCENTRATED LOAD AT MIDSPAN (LBF)**
<b>Main Runner Metric</b>												
EZES3600M-12-18	14	3600 x 38 x 14	150	20	72	—	ID	25%	35%	60%	13.15	32.88
<b>Cross Tee Metric</b>												
EZES1200M-12-12	14	1200 x 38 x 14	300	60	72	—	ID	25%	35%	60%	8.66	21.31
EZES600M-12-12	14	600 x 38 x 14	0	60	36	—	ID	25%	35%	60%	29.68	36.51

\*SM1020 is not hemmed along 3/4" side

\*Maximum recycled content percentage. Recycled content varies by manufacturing location.

\*\*Allowable concentrated loads at midspan are determined in accordance with AC308 Section 3.2.













For each framing member, the allowable concentrated load must not be combined with the allowable uniform load. To specify Main Runners, Cross Tees, Wall Angles or Shadow Molding in black, order by item number followed by BLK. Example EZES12-12-18 BLK  
Flex Wall Angle will fit a 5-1/2" radius or larger

# 9/16" EZ Stab Elite Narrow System

## Build America Buy America Compliant











	GRID FACE (IN.)	DIMENSIONS (IN.)	SLOT SPACING (IN.)	PIECES/CARTON	FT./CARTON	SEISMIC DESIGN CATEGORY	STRUCTURAL CLASSIFICATION (ASTM C635)	RECYCLED CONTENT PRE*	RECYCLED CONTENT POST*	RECYCLED CONTENT TOTAL*	ALLOWABLE UNIFORM LOAD (PLF)	ALLOWABLE CONCENTRATED LOAD AT MIDSPAN (LBF)**
<b>Main Runners</b>												
USA-EZES12-12-18	9/16	144 x 1-1/2 x 9/16	6 O.C.	20	240	A-C	ID	42%	51%	93%	13.15	32.88
USA-EZES12-12-19	9/16	144 x 1-1/2 x 9/16	6 O.C.	20	240	A-F	HD	42%	51%	93%	17.97	44.93
<b>Cross Tee</b>												
USA-EZES2-12-12	9/16	24 x 1-1/2 x 9/16	—	60	120	—	—	42%	51%	93%	21.97	34.96
USA-EZES2-12-19	9/16	24 x 1-1/2 x 9/16	—	60	120	—	HD	42%	51%	93%	50.00	62.50
USA-EZES4-12-12	9/16	48 x 1-1/2 x 9/16	12 O.C.	60	240	—	—	42%	51%	93%	8.44	21.09
USA-EZES4-12-19	9/16	48 x 1-1/2 x 9/16	12 O.C.	60	240	—	HD	42%	51%	93%	17.97	44.93
<b>Wall Angle</b>												
USA-WA14-9	9/16	144 x 7/8 x 9/16	—	40	480	—	—	42%	51%	93%	—	—
USA-WA14-14	7/8	144 x 7/8 x 7/8	—	40	480	—	—	42%	51%	93%	—	—

## Maximum Fixture Weight

ITEM NUMBER	CONFIGURATION		FIXTURE		HANGER SPACING		MAXIMUM WEIGHT	
	A	B	A	B	A	B	A	B
<b>Main Runner to Main Runner - Drawing Key: Main Runner (I) Cross tee (---) Hanger wire (+)</b>								
EZES4-12-12			24" x 48"	24" x 48"	48"	48"	41.00 lbs.	32.00 lbs.
EZES4-12-19			24" x 48"	24" x 48"	48"	48"	56.00 lbs.	56.00 lbs.
EZES4-12-12			24" x 48"	24" x 48"	48"	48"	41.00 lbs.	32.00 lbs.
EZES4-12-19			24" x 48"	24" x 48"	48"	48"	56.00 lbs.	56.00 lbs.
EZES4-12-12			24" x 24"	24" x 24"	48"	48"	26.00 lbs.	26.00 lbs.
EZES4-12-19			24" x 24"	24" x 24"	48"	48"	53.50 lbs.	56.00 lbs.

Cross tees tested as follows: EZES4-12-12 tested at 8.44 lbs/LF to 1/360 of 4' span; EZES4-12-19 tested at 17.97 lbs/LF to 1/360 of 4' span.

## Accessories

	ITEM NUMBER	PRODUCT NAME	DIMENSIONS L" X W" X H" (MM)	COLOR	PIECES/CARTON	LBS./CARTON	
SEISMIC		SLEEVE916	9/16" Sleeve	4 x 9/16 x 1/64 (102 x 15 x 1)	White	100	1
		CTSPC-2	Seismic Perimeter Clip	3-1/16 x 2-1/4 x 1-1/16 (78 x 58 x 27)	Metal	100	9
		CTSTJ	Seismic Transition Joint Clip	3-1/2 x 3-1/2 x 1-3/16 (89 x 89 x 31)	Metal	100	10
STANDARD		AHD	Adjustable Hold Down Clip	1-1/8 x 1/2 x 1-11/16 (29 x 13 x 43)	Black	1000	16
		HW12	Hanger Wire 12' (3660 mm) 12 Gage (2.05 mm)	144 x 12 gage x 12 gage (3658 x 12 gage x 12 gage)	Metal	141	50
		EZSLOTTER	Slot Punch	11 x 3-1/4 x 1 (280 x 83 x 26)	Metal	1	2.5
		SFYK	SmartFit Yoke	8.55 x 1.25 x 9.56 (217 x 32 x 243)	Metal	20	9
		IC-9	9/16" Inside Corner	3 x 3 x 1/16 (76 x 76 x 1.52)	White	100	10
	OC-9	9/16" Outside Corner	3 x 3 x 1/16 (76 x 76 x 1.52)	White	100	10	
	STBAR-2	CTC 2' Stabilizer Bar	2x5; 2x6; 2x8 For all 2x5, 2x6, 2x8 applications; typically 1 pc./panel for 2x5, 2x6, 2 pc./panel for 2x8	Metal	40	—	

**NOTE:** For additional accessories, refer to Acoustical and Drywall Suspension Systems Accessories listing.

# 9/16" EZ Stab Elite Narrow System

## Physical Data

### CROSS TEE/MAIN RUNNER MATERIAL

Hot dipped galvanized steel (G30)

### FACE DIMENSION

9/16"

### CROSS TEE/MAIN RUNNER INTERFACE

Stepped-end/Override

### DUTY CLASSIFICATION

Heavy duty and Intermediate duty  
per ASTM C635

### CROSS TEE/MAIN RUNNER

**SURFACE FINISH**  
Painted Steel Cap

### PROFILE HEIGHT

ID: 1-1/2"  
HD: 1-11/16"

### VOC EMISSIONS

Independently certified compliant with  
California Department of Public Health  
CDPH/EHLB/Standard Method  
Version 1.2, 2017.

### END DETAIL

Main Runner: Integral Stab  
Cross Tee: Staked-on Stab Clip

### SEISMIC CATEGORY

A, B, C, D, E, F

### WARRANTY

10-year Limited Suspension Systems  
warranty increases to 30 years when  
installed with CertainTeed ceiling panels.  
Full warranty information can be found  
at [certainteed.com/warranty](https://certainteed.com/warranty).

## Seismic Performance

### MAIN RUNNERS:

All main runners

### MINIMUM LBS. TO PULLOUT

**COMPRESSION/TENSION:**  
180 lbs.

### CROSS TEES:

All cross tees

## ICC Evaluation Service, Inc., Report Compliance

Suspension systems manufactured by CertainTeed ceilings have been reviewed and are approved by listing in ICC-ES Evaluation Report ESR-3336. CertainTeed suspension systems have been reviewed and are approved by listing in the City of Los Angeles Building Code ESR-3336 LABC Supplement. Evaluation Reports are subject to reexamination, revision and possible cancellation. Refer to [certainteed.com](https://certainteed.com) for current reports.



### CertainTeed

CEILINGS • GYPSUM • INSULATION • ROOFING • SIDING • TRIM  
20 Moores Road, Malvern, PA 19355 800-233-8990 [certainteed.com](https://certainteed.com)