

# Aquarock™

## DESIGNER SERIES

Gypsum Ceilings

### Features & Benefits:

- Made with proprietary Enhanced Glass Reinforced Gypsum substrate.
- Moisture resistant.
- Mold resistant core.
- Sag resistant.
- Vinyl faced.
- Exceptional indoor/outdoor performance in ceiling applications up to 95% relative humidity.
- Suitable for use as a component in certain clean room assemblies (ISO 14644-1 Class 5/Fed. Std. 209E Class 100/M3.5).
- Perfect for exterior soffits and canopies, parking garages, pools, spas, commercial kitchens, and locker, shower or therapy rooms.
- Scrubbable USDA/FSIS accepted Clean Room Facing (CRF) vinyl facing seals out moisture.
- Non-combustible core panel resists damage from blunt impact and chemical fumes.
- Approved by Canadian Food Inspection Agency (CFIA) for use in food establishments.


### Applications:

- Exterior Soffits
- Exterior Canopies
- Parking Garages
- Pools
- Spas
- Commercial Kitchens
- Locker Rooms
- Shower Rooms
- Food Processing

### Relative Installed Cost:

\$\$\$\$

**CertainTeed**  
SAINT-GOBAIN

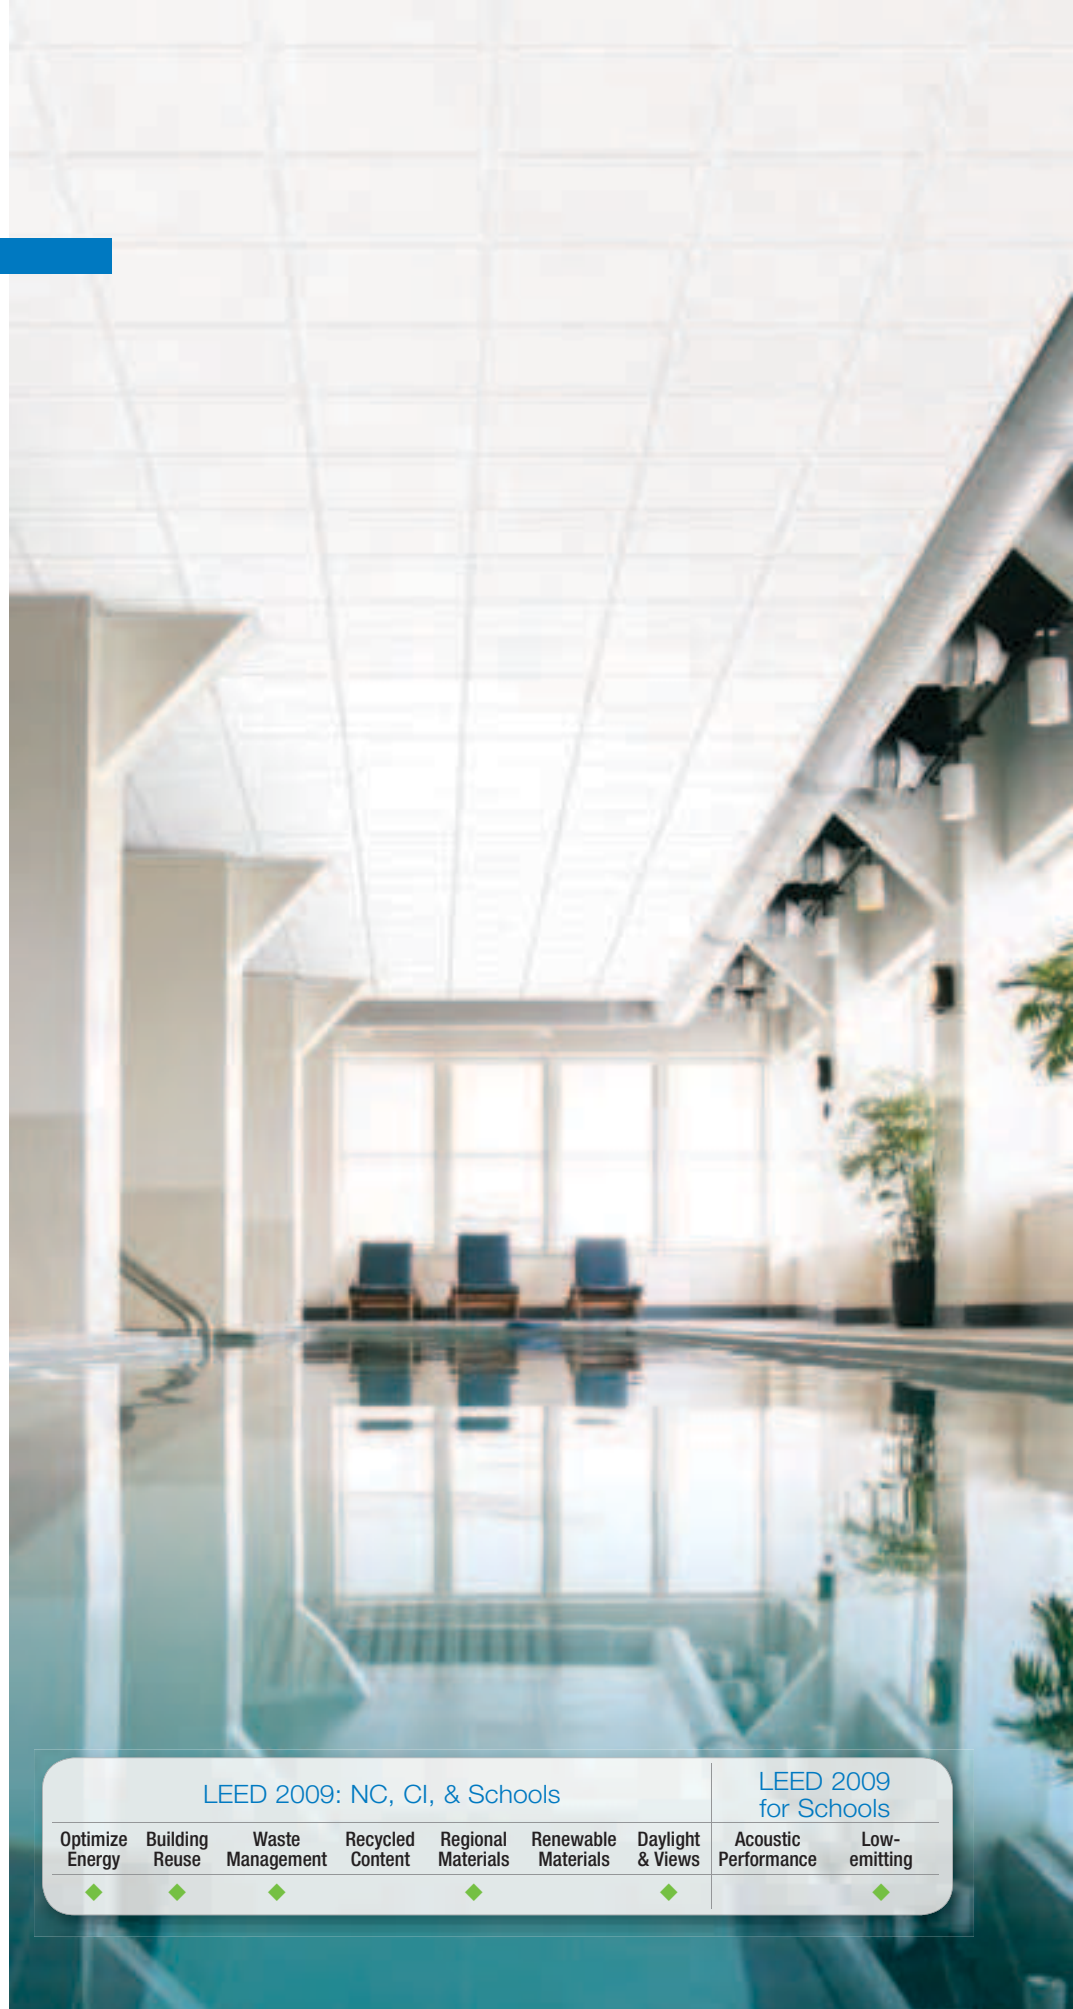

#### LEED 2009: NC, CI, & Schools

Optimize Energy	Building Reuse	Waste Management	Recycled Content	Regional Materials	Renewable Materials	Daylight & Views
◆	◆	◆		◆		◆

#### LEED 2009 for Schools


Acoustic Performance	Low-emitting
	◆

Attributes:

ITEM NUMBER	NOMINAL SIZE (Inches)	EDGE DETAIL	NRC	CAC	LR	RECYCLED CONTENT %
SAFETONE® CLASS A						
White CRF						
1182-CRF-1SV	24 x 24 x 1/2	Trim	—	40	0.78	0
1180-CRF-1SV	24 x 48 x 1/2	Trim	—	42	0.78	0

ASTM E 1264 Classification: Type XX, Pattern G, Fire Class A

Edge Detail:



TRIM EDGE  
(Square) 15/16" Grid

Finish:



WHITE CRF  
CRF-1

Product Features at a Glance:

