

#66X Expanded Flange Casing Bead (XXCB)

Expanded flange casing bead or plaster stop

Used as a stucco/plaster stop to provide a screed edge and protective finish trim while terminating plaster or thin stone in a clear, straight line at doors, windows, and other openings. The #66X is recommended as an edge divider between plaster and other dissimilar materials. An expanded flange makes tie-on applications easier.

Not recommended at base of wall in lieu of an FHA-7 Foundation Weep Screed. Designed for use under extreme reinforcement conditions where a standard short flange casing bead will be inadequate. #66X Casing Beads are available with or without weep holes and available in zinc alloy for advanced corrosion resistance.

Galvanized steel products should not be used with Portland cement stucco containing calcium chloride additives or magnesium oxychloride cement stucco. The selection of the appropriate type of material for accessories shall be determined by the surrounding climatic and environmental conditions such as salt air, high humidity, and industrial pollution.

Product Data & Ordering Information:

Material: 26 Gauge, G60 Hot-Dipped galvanized steel
 Also available in 99.97% pure Zinc, compliant with ASTM B69
 Dimensions: 1/4" to 1-1/4" Grounds, 10' lengths

Ground	Length	Pcs./Ctn.	Ft./Ctn.	Wt./Ctn.	Ctn./Skid
1/4"	10'	30	300	46 lbs.	20
3/8"	10'	30	300	46 lbs.	20
1/2"	10'	30	300	46 lbs.	20
5/8"	10'	30	300	49 lbs.	20
3/4"	10'	30	300	49 lbs.	20
7/8"	10'	30	300	54 lbs.	20
1"	10'	30	300	56 lbs.	20
1-1/4"	10'	30	300	60 lbs.	20

ASTM & Code Standards:

- Material: ASTM C1063
- Installation: C1063 (exterior), ASTM C841 (interior) and EMLA-920
- Thin stone ASTM C1780.
- SDS & Product Certification Information

Storage:

All stored materials shall be kept dry. Materials shall be stacked off the ground, supported on a level platform, and protected from the weather and surface contamination conforming to ASTM C1063.

Limitations:

Galvanized steel products should not be used with magnesium oxychloride cement stucco or Portland cement stucco containing calcium chloride additives. The selection of the appropriate type of material for accessories shall be determined by the surrounding climatic and environmental conditions such as salt air, industrial pollution and high humidity.



Sustainability Credits:

For more details and LEED letters contact Technical Services at 888-437-3244 or visit www.clarkdietrich.com/LEED

LEED v4 MR Credit -- Building Product Disclosure and Optimization: EPD (1 point) - Sourcing of Raw Materials (1 point) - Material Ingredients (1 point) - Construction and Demolition Waste Management (up to 2 points) - Innovation Credit (up to 2 points).

LEED 2009 Credit MR 2 & MR 4 -- ClarkDietrich's steel products are 100% recyclable and have a national average recycled content of 34.2% (19.8% post-consumer and 14.4% pre-consumer). If seeking a higher number to meet Credit MR 5, please contact us at (info@clarkdietrich.com / 888-437-3244)

09.22.36 (Metal Lath)

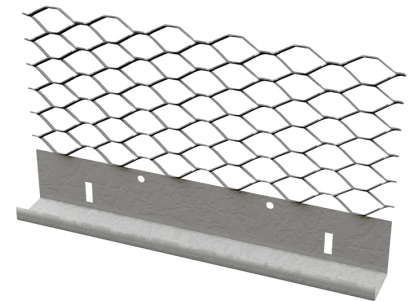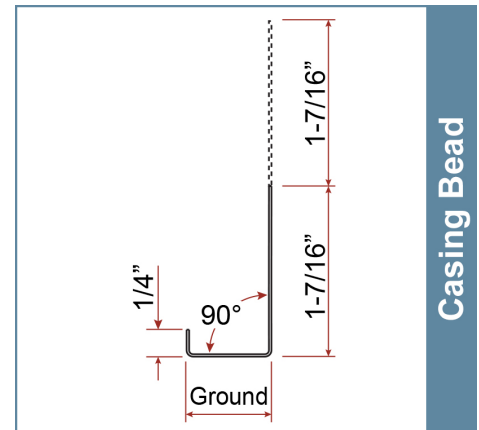

Casing Bead

Project Information

Name:
Address:

Contractor Information

Name:
Contact:
Phone:
Fax:

Architect Information

Name:
Contact:
Phone:
Fax: