

Commercial Strapping - CS2.5-150-33

Multipurpose pre-punched commercial coil stock used for bracing, bridging or tension strapping

Coil Strapping is made in a variety of widths, each with a unique layout of pre-punch holes for a variety of fastening options to meet different application requirements.

Product Data & Ordering Information:

| | |
|-----------------|--|
| Material: | 50 ksi |
| Coating: | G60 |
| Thickness: | 33mil (20 ga) 0.0346" Design thickness 0.0329" Minimum thickness |
| Width: | 2-1/2" |
| Packaging: | 150 foot Boxed Coil |
| Product Weight: | 42.5 lbs/coil |

Allowable Tension Load for: CS2.5-150-33 33mil (20 ga) - 2-1/2" Wide Commercial Strapping


| Stud / Joist / Framing Thickness | 33mil (20ga) 33ksi | 43mil (18ga) 33ksi | 54mil (16ga) 50ksi | 68mil (14ga) 50ksi | Allowable Strap Tension |
|-------------------------------------|-----------------------|-----------------------|-----------------------|-----------------------|-------------------------|
| #10 Fasteners per Each End of Strap | 10 | 7 | 7 | 7 | 1650 lbs |

ASTM & Code Standards:


- Sheet steel meets or exceeds requirements of ASTM A1003
- Galvanized coating meets or exceeds requirements of ASTM A653
- SDS & Product Certification Information available at www.clarkdietrich.com/SupportDocs

Alternative Products:


- Flat Strapping

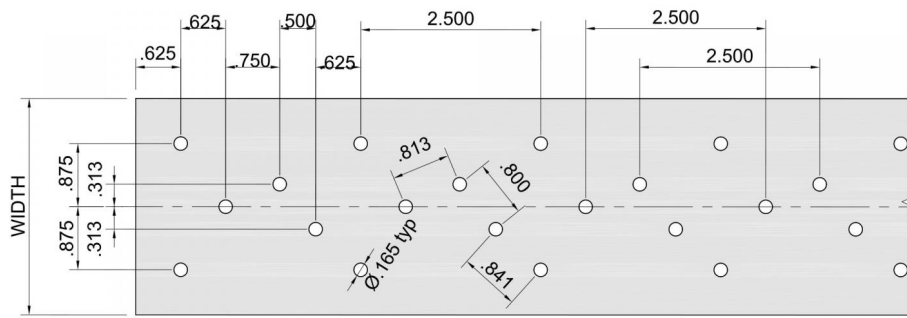

05.40.00 (Cold-Formed Metal Framing)

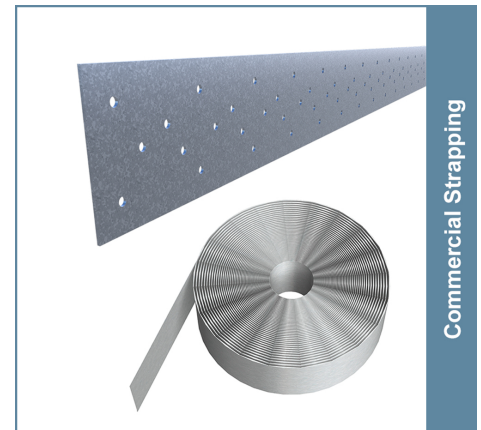

- Widths Available: 1", 1-1/2", 2", 2-1/2" & 3"
- Available in 20, 18, 16 & 14 gauge
- Pre-punched for fast and accurate fastener attachment

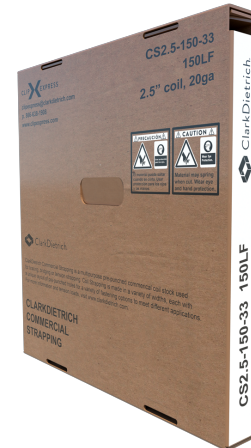

Sustainability Credits:

For more details and LEED letters contact Technical Services at 888-437-3244 or visit www.clarkdietrich.com/LEED

LEED v4 MR Credit -- Building Product Disclosure and Optimization: EPD (1 point) - Sourcing of Raw Materials (1 point) - Material Ingredients (1 point) - Construction and Demolition Waste Management (up to 2 points) - Innovation Credit (up to 2 points).

LEED 2009 Credit MR 2 & MR 4 -- ClarkDietrich's steel products are 100% recyclable and have a national average recycled content of 34.2% (19.8% post-consumer and 14.4% pre-consumer). If seeking a higher number to meet Credit MR 5, please contact us at (info@clarkdietrich.com / 888-437-3244)

Project Information

Name:
Address:

Contractor Information

Name:
Contact:
Phone:
Fax:

Architect Information

Name:
Contact:
Phone:
Fax: