

Product category: ProSTUD® 25 Drywall Stud
Product name: 250PDS125-15 50ksi G40EQ - Punched
2-1/2" ProSTUD 25 (15mil)
Coating: G40EQ
Color coding: None

Geometric Properties

Web depth	2.500 in	Weight	0.288 lb/ft
Flange width	1.250 in	Punchout width	0.750 in
Stiffening lip	0.250 in	Punchout length	1.750 in
Design thickness	0.0158 in	Minimum thickness	0.0150 in
Yield stress, Fy	50 ksi		

Gross Section Properties of Full Section, Strong Axis

Cross sectional area (A)	0.085 in ²
Moment of inertia (Ix)	0.088 in ⁴
Radius of gyration (Rx)	1.020 in
Gross moment of inertia (Iy)	0.018 in ⁴
Gross radius of gyration (Ry)	0.459 in

Effective Section Properties, Strong Axis

Effective area (Ae)	0.033 in ²
Moment of inertia for deflection (Ixe)	0.080 in ⁴
Section modulus (Sxe)	0.044 in ³
Allowable bending moment (Ma)	1,198 in-lbs
Allowable shear force in web (Unpunched) (Vag)	147 lb
Allowable shear force in web (Punched) (Vanet)	141 lb

Torsional Properties

St. Venant torsion constant (J x 1000)	0.0070 in ⁴
Warping constant (Cw)	0.023 in ⁶
Distance from shear center to neutral axis (Xo)	-0.959 in
Radii of gyration (Ro)	1.473 in
Torsional flexural constant (Beta)	0.576
Unbraced Length (Lu)	24.5 in

Code Approvals & Performance Standards

Calculated properties are based on:

AISI S100-16 North American Specification for the Design of CFS Structural Members

- Effective properties incorporate the strength increase from the cold work of forming as applicable per AISI A7.2.
- Tabulated gross properties, including torsional properties, are based on full-unreduced cross section of the studs, away from punchouts.
- For deflection calculations, use the effective moment of inertia.
- Allowable moment includes cold work of forming.
- Allowable moment is taken as the lowest value based on local or distortional buckling. Distortional buckling strength is based on a k-phi = 0.

AISI S220-15 North American Standard for CFS Framing - Nonstructural Members

- Section A4 - Material - Chemical & mechanical requirements (Referencing ASTM A1003/A1003M)
- Section A5 - Corrosion Protection (Referencing ASTM A653/A653M)
- Section A6 - Products - Thickness, shapes, tolerances, identification
- Section C - Installation - (Referencing ASTM C754)

ClarkDietrich's nonstructural framing comply with:

- IBC-2018 - International Building Code
- Intertek CCRR-0207, LA RR #26019, NYC - OTCR
- SFIA Code Compliance Certification Program
- ASTM E72 Standard Test Methods of Conducting Strength Tests of Panels for Building Construction
- SDS & Product Certification Information is available at www.clarkdietrich.com/SupportDocs

Notes:

- East Coast Punch Pattern: Center of knockouts are 12" from the leading edge then 48" o.c.
- West Coast Punch Pattern: Center of knockouts are 24" from the leading edge then 24" o.c.


Sustainability Credits:

For more details and LEED letters contact Technical Services at 888-437-3244 or visit www.clarkdietrich.com/LEED

LEED v4 MR Credit -- Building Product Disclosure and Optimization: EPD (1 point) - Sourcing of Raw Materials (1 point) - Material Ingredients (1 point) - Construction and Demolition Waste Management (up to 2 points) - Innovation Credit (up to 2 points).

LEED 2009 Credit MR 2 & MR 4 -- ClarkDietrich's steel products are 100% recyclable and have a national average recycled content of 34.2% (19.8% post-consumer and 14.4% pre-consumer). If seeking a higher number to meet Credit MR 5, please contact us at (info@clarkdietrich.com / 888-437-3244)

09.22.16 (Non-Structural Metal Framing)

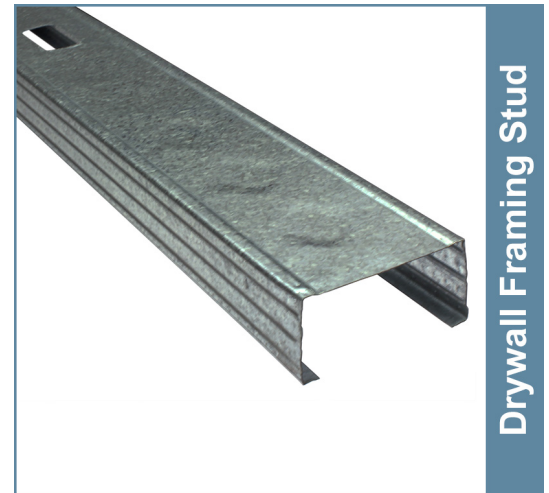

* Embossments in web are only placed on sections 2-1/2" and wider.

UL® Testing Standard

- UL® 263, ASTM E119
- Over 50 UL® design listings
- UL® file number R26512
- U.S. Patent No. 9,010,070





Product category: ProSTUD® 25 Drywall Stud
Product name: 250PDS125-15 50ksi G40EQ - Punched
 2-1/2" ProSTUD 25 (15mil)

2-1/2" ProSTUD 25 (15mil) Drywall Stud - COMPOSITE Limiting Heights (AC86-2019)

(1 layer) 5/8" Type X Gypsum Board

Spacing (inches)	5 psf			7.5 psf			10 psf		
	L/120	L/240	L/360	L/120	L/240	L/360	L/120	L/240	L/360
12	17'-2"	14'-8"	13'-0"	15'-0"	12'-10"	11'-4"	13'-3"f	11'-8"	10'-4"
16	15'-7"	13'-4"	11'-9"	13'-3"f	11'-8"	10'-4"	11'-5"f	10'-7"	9'-1"
24	13'-3"f	11'-8"	10'-4"	10'-10"f	10'-2"	8'-6"	9'-4"f	8'-11"	-

Composite Table Notes:

- Allowable composite limiting heights were determined in accordance with ICC-ES AC86-2019.
- Additional composite wall testing and analysis requirements of the SFIA Code Compliance Certification Program were observed.
- In accordance with current building codes and AISI design standards, the 1/3 Stress Increase for strength was not used.
- The composite limiting heights provided in the tables are based on a single layer of 5/8" Type X gypsum board from the following manufacturers: American, CertainTeed, Georgia Pacific, Continental, National, PABCO, and USG.
- The gypsum board must be applied full height in the vertical orientation to each stud flange and installed in accordance with ASTM C754 using minimum No. 6 Type S Drywall screws spaced as listed below:
- Screws spaced a maximum of 16 in on-center to framing members (including top & bottom track) spaced at 16 in or 12 in on-center.
- Screws spaced a maximum of 12 in on-center to framing members (including top & bottom track) spaced at 24 in on-center.
- No fasteners are required for attaching the stud to the track except as detailed in ASTM C754.
- Stud end bearing must be a minimum of 1 inch.
- f: Adjacent to the height value indicates that flexural stress controls the allowable wall height.
- s: Adjacent to the height value indicates that shear/end reaction controls the allowable wall height.

2-1/2" ProSTUD 25 (15mil) Drywall Stud - NON-COMPOSITE Limiting Heights (FULLY BRACED)

Spacing (inches)	5 psf			7.5 psf			10 psf		
	L/120	L/240	L/360	L/120	L/240	L/360	L/120	L/240	L/360
12	12'-8"	10'-2"	8'-11"	10'-4"	8'-11"	7'-9"	8'-11"	8'-1"	7'-1"
16	10'-11"	9'-3"	8'-1"	8'-11"	8'-1"	7'-1"	7'-9"	7'-4"	6'-5"
24	8'-11"	8'-1"	7'-1"	7'-4"	7'-1"	6'-2"	6'-4"	6'-4"	5'-7"

Non-Composite (Fully Braced) Table Notes:

- Heights are based on AISI S100-16, North American Specification, and AISI S220-15, North American Standard for Cold-Formed Steel Framing - Nonstructural Members, using steel properties alone.
- Above listed Non-Composite Limiting Heights are applicable when the unbraced length is less than or equal to L_u .
- Heights are limited by moment, deflection, shear, and web crippling (assuming 1" end reaction bearing).

2-1/2" ProSTUD 25 (15mil) Drywall Stud - NON-COMPOSITE Limiting Heights (BRACED at 48" o.c.)

Spacing (inches)	5 psf			7.5 psf			10 psf		
	L/120	L/240	L/360	L/120	L/240	L/360	L/120	L/240	L/360
12	10'-5"	10'-2"	8'-11"	8'-6"	8'-6"	7'-9"	7'-4"	7'-4"	7'-1"
16	9'-0"	9'-0"	8'-1"	7'-4"	7'-4"	7'-1"	6'-5"	6'-5"	6'-5"
24	7'-4"	7'-4"	7'-1"	6'-0"	6'-0"	6'-0"	5'-3"	5'-3"	5'-3"

Non-Composite (Braced at 48" o.c.) Table Notes:

- Heights are based on AISI S100-16, North American Specification, and AISI S220-15, North American Standard for Cold-Formed Steel Framing - Nonstructural Members, using steel properties alone.
- Above listed Non-Composite Limiting Heights are based on discreet stud bracing at 4 ft o.c.
- Heights are limited by moment, deflection, shear, and web crippling (assuming 1" end reaction bearing).

Project Information

Name:
Address:

Contractor Information

Name:
Contact:
Phone:
Fax:

Architect Information

Name:
Contact:
Phone:
Fax: