


# ClarkDietrich® PRODUCT INFORMATION

Example: 362S162-43 (33ksi, CP60) punched

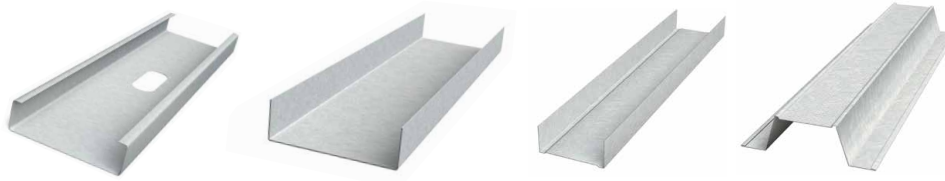

S = Structural stud or joist  
PDS = ProSTUD® drywall stud

T = Structural track  
PDT = ProTRAK® drywall track

U = CRC or U-channel

F = Furring channel

### Punching


Punched studs or joists will be supplied unless the customer indicates unpunched material is required at time of order. All track and channels are unpunched.

### Protective Coating

Structural framing:  
CP60 (CP90 available)  
Drywall framing:  
G40EQ DiamondPlus®,  
G40EQ(G40 or CP60 available)

### KSI -Yield Strength (Fy)

Structural: 33ksi or 50ksi steel  
Drywall: See ProSTUD below.

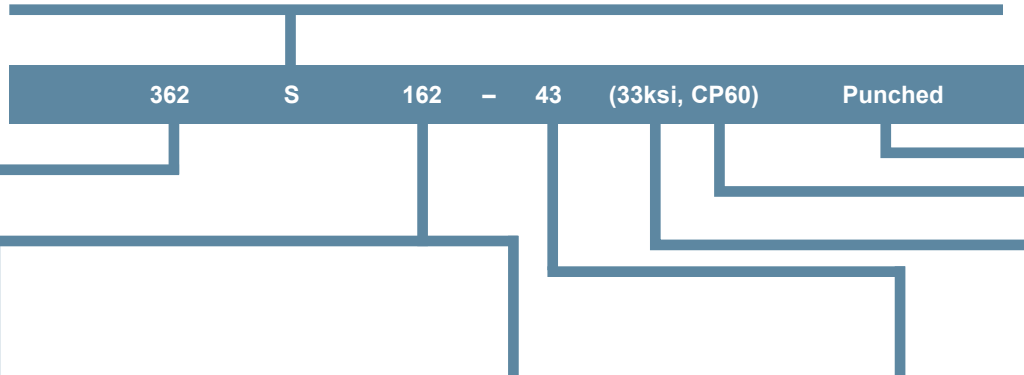

ClarkDietrich structural member depths, flanges & available thickness				ClarkDietrich return lip dimensions			Structural thickness identification and color coding					
Member depths	Flange widths range	Mils range	Gauge range	Flange width	Return lip	Member depths	Member mils	Thickness gauge	Design thickness	Min. thickness	Color code	
(250) 2-1/2"	1-3/8," 1-5/8," 2" & 2-1/2"	33-68	20-14 ga	137 (1-3/8")	3/8"	3-5/8"-8"	33	20	0.0346"	0.0329"	White	
(350) 3-1/2"	1-3/8," 1-5/8," 2" & 2-1/2"	33-68	20-14 ga	162 (1-5/8")	1/2"	2-1/2"-14"	43	18	0.0451"	0.0428"	Yellow	
(362) 3-5/8"	1-3/8," 1-5/8," 2" & 2-1/2"	33-97	20-12 ga	200 (2")	5/8"	3-5/8"-14"	54	16	0.0566"	0.0538"	Green	
(400) 4"	1-3/8," 1-5/8," 2" & 2-1/2"	33-97	20-12 ga	250 (2-1/2")	5/8"	3-5/8"-14"	68	14	0.0713"	0.0677"	Orange	
(550) 5-1/2"	1-5/8," 2" & 2-1/2"	33-97	20-12 ga	300 (3")	5/8"	6"-14"	97	12	0.1017"	0.0966"	Red	
(600) 6"	1-3/8," 1-5/8," 2," 2-1/2" & 3"	33-97	20-12 ga	<b>Old stud/track designations</b>			<b>ClarkDietrich ProSTUD® Drywall framing system thickness</b>					
(800) 8"	1-3/8," 1-5/8," 2," 2-1/2" & 3"	33-97	20-12 ga	<b>Designation</b>	<b>Type</b>	<b>Flange/leg</b>	<b>Member gauge</b>	<b>Mils</b>	<b>KSI</b>	<b>Design thickness</b>	<b>Min. thickness</b>	<b>Color code</b>
(925) 9-1/4"	1-5/8," 2" & 2-1/2"	43-97	18-12 ga	CWN	Stud	1-3/8"	ProSTUD 25	15	50	0.0158	0.0150	None
(1000) 10"	1-5/8," 2," 2-1/2" & 3"	43-97	18-12 ga	CSJ	Stud	1-5/8"	ProSTUD 20	18	70	0.0190	0.0181	Brown
(1200) 12"	1-5/8," 2," 2-1/2" & 3"	54-97	16-12 ga	CSW	Stud	2"	ProSTUD 30MIL	30	33	0.0312	0.0296	Pink
(1400) 14"	1-5/8," 2," 2-1/2" & 3"	54-97	16-12 ga	CSE	Stud	2-1/2"	ProSTUD 33MIL	33	33	0.0346	0.0329	White
				CSS	Stud	3"	ProTRAK (25, 20) = 50ksi			ProTRAK 30mil & 33mil = 33ksi		
				TSB	Track	1-1/4"						
				TSC	Track	2"						
				TSE	Track	3"						

## HOW TO IDENTIFY OUR PRODUCTS

ClarkDietrich has adopted standard nomenclature established by the American Iron and Steel Institute (AISI) for identifying each of its products. Coding of each member consists of four parts, in this order:

- A number which identifies the web depth of the member to two decimal places. 600 = 6.00," 1000 = 10.00," 550 = 5.50," 362 = 3.625," etc.
- A letter that tells you the type of member, such as S = Stud/joist, T = Track, U = U-channel, and F = Furring channel.
- A number that defines the flange dimension in inches to two decimal places. 162 = 1.625," 200 = 2.00," 125 = 1.25," etc.
- A number following a hyphen that denotes the minimum delivered thickness in mils (33mils = 33/1000 inches which is approximately 0.0329"). Minimum delivered thickness is 95% of design thickness.

### Product availability.

Most products manufactured by ClarkDietrich are readily available in all markets, but there can be exceptions. Please contact your ClarkDietrich Sales Representative to make sure the product you need is available in your market area.

### Protective coatings.

**Non-structural products** are coated to meet the requirements of AISI S220, with a G40 or a protective coating with an equivalent corrosion resistance. G40EQ DiamondPlus® available for 15mil & 18mil only. Contact your ClarkDietrich Sales Representative for market availability. ProSTUD® Drywall Framing System meets the Code Compliance Research Report Intertek CRR-0207.

**Structural framing products** are available with a variety of protective coatings that meet the CP60 coating protection level requirements of AISI S240. These coatings may include G60, A60, AZ50 or GF30, all of which satisfy the above referenced standards. CP90 coatings are an enhanced option that can be requested for highly corrosive environments. ClarkDietrich can supply a specific or enhanced coating to meet specific project requirements when requested.

ClarkDietrich is a proud member of the Steel Framing Industry Association (SFIA).