

PRO Splayed Corner Bead

Splayed Corner Bead

PRO Splayed Corner Bead is an adjustable corner bead designed for off-angle outside corner conditions from 120° to 140°. Multiple perforations along the 1-1/4" flanges enhance joint compound bonding. Easy to apply, this vinyl trim can be nailed, stapled or attached with a high tack spray adhesive. Vinyl beads are easily cut with snips or utility knives without distorting the profile.

Product Data & Ordering Information:

Material: 0.040" PVC (Polyvinyl Chloride)
 Dimensions: 1-1/4" leg x 1-1/4" leg

Product code	Flanges	Length	Pcs./Ctn.
PROSB125-8	1-1/4"	8'	70
PROSB125-9	1-1/4"	9'	70
PROSB125-10	1-1/4"	10'	70

ASTM & Code Standards:

- ASTM C1047 - Standard Specification for Accessories for Gypsum Wallboard and Gypsum Veneer Base
- ASTM D3678 Class 2 materials
- Installation: ASTM C840 & C 841 (interior finishes)
- SDS & Product Certification Information is available at www.clarkdietrich.com/SupportDocs


Storage:

All stored materials shall be kept dry. Materials shall be stacked off the ground, supported on a level platform, and protected from the weather.

09.22.00 (Support for Plaster & Gypsum Board)



- Rust proof and dent resistant
- Flexibility allows flush fit on unusual outside corner angles

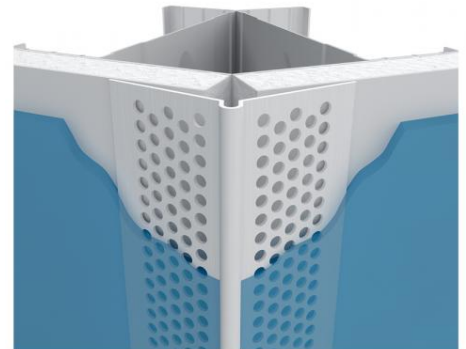

Project Information

Name:
Address:

Contractor Information

Name:
Contact:
Phone:
Fax:

Architect Information

Name:
Contact:
Phone:
Fax: