

LOCTITE[®]

DISTRIBUTED BY:

GRABBER[®]
CONSTRUCTION PRODUCTS

FAST FRAME[™]

COLUMN FRAMING SYSTEM



Frames Columns in 5 Minutes!!!

Henkel

Benefits

- No studs, no track required
- UL[®] Classified
- For use on steel or concrete
- Fits all dimensions of square columns
- Reduces framing time by more than 80%
- Saves up to 40% on overall framing costs



The innovative **Loctite® Fast Frame™** Column Framing System significantly reduces the time and costs associated with framing square concrete and steel columns for drywall installation. The easy-to-use, patent-pending system replaces stud and track installation with revolutionary brackets that are attached to concrete columns using adhesive, or to steel columns using powder-actuated fasteners. The **Loctite® Fast Frame™** Column Framing System fits all square column dimensions and reduces average framing time from 40 minutes with stud and track to just 5 minutes – **that's 8 times faster!**

CONCRETE



For Concrete Columns – Use Loctite® Fast Frame™ Metal Framing Brackets with Loctite® Fast Frame™ Construction Adhesive.




STEP 1
Apply the Loctite® Fast Frame™ Construction Adhesive in an S-shaped pattern to the Loctite® Fast Frame™ Framing Bracket.



STEP 2
Place and align the Loctite® Fast Frame™ Framing Bracket on the corner of the column. Repeat steps 1 and 2 until each Framing Bracket is spaced appropriately. Allow 24 hours drying time.



STEP 3
Install drywall after 24 hour drying time.

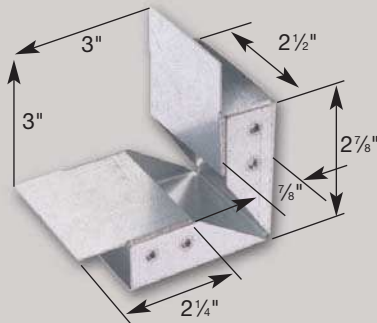

STEEL



For Steel Columns – Use Loctite® Fast Frame™ Metal Framing System Brackets with powder-actuated fasteners.



STEP 1
Place and align the Loctite® Fast Frame™ Framing Bracket on the corner of the steel column.



STEP 2
Attach the Loctite® Fast Frame™ Framing Bracket to the steel column with powder-actuated fasteners. Repeat steps 1 and 2 until each Framing Bracket is spaced appropriately.



STEP 3
Install drywall.

When attached to steel columns with powder-actuated fasteners, Fast Frame™ Metal Framing Brackets meet UL® Classification for Fire Resistance. Visit www.fastframe.loctite.com for more information.



Henkel Corporation
Loctite® Fast Frame™ Framing Brackets
STEEL FRAMING MEMBERS
FIRE RESISTANCE CLASSIFICATION DESIGN NO. X537
SEE UL FIRE RESISTANCE DIRECTORY
30MH

To learn more about the new Loctite® Fast Frame™ Column Framing System, visit www.fastframe.loctite.com or call the Loctite® Light Gauge Steel Construction team at **1-888-LOCTITE (562-8483)**.



Henkel Corporation
Industry & Maintenance
1001 Trout Brook Crossing
Rocky Hill, CT 06067, USA
(888) 562-8483 • www.henkel.us

DISTRIBUTED BY:

GRABBER®
CONSTRUCTION PRODUCTS

800-477-TURN
www.grabberman.com