

ULTRA HP[®] IR / ULTRA HP[®]



Fiberglass-Reinforced Accessory Asphalt Shingles

Our specially constructed ridge cap shingles provide a high-quality alternative to using cut-up roof shingles to protect this important area. The “HP” stands for “High Profile,” meaning they add dimension, depth, and texture to your roof line and rakes. The “IR” indicates compliance with Class 4 Impact Resistance tests⁵, the highest rating available. They’re also available in a limited color range to complement selected IKO laminated shingles. When you’ve built a roof with IKO designer shingles, top its long-lasting good looks with IKO UltraHP IR & UltraHP ridge cap shingles!

Click [here](#) or scan this QR code for product literature, color swatches and color availability.



UltraHP IR & UltraHP are impact-resistant⁵, preformed, two-layer, hip and ridge accessory asphalt shingles, manufactured on a robust fiberglass reinforcement.

1 Features and Benefits

- ✓ Class 4 Impact Resistance⁶ (UltraHP IR only)
- ✓ Preformed And Precut
- ✓ No Cutting Or Folding
- ✓ Blue-Green Algae Resistant
- ✓ Polymer-Modified Coating

2 General Information

Shingles/Bundle	30
Coverage/Bundle	20 linear ft. (6.1 linear m)
Bundles/Pallet	42
Pallet Size	46 x 54 in. (117 x 138 cm)
Product Stock No. (UltraHP IR)	4561XXX
Product Stock No. (UltraHP)	4560XXX

NOTE: XXX refers to numerical product color code. Product color availability varies by region.

3 Product Dimensions

Length	11 1/2 in. (292 mm)
Width	10 in. (254 mm)
Exposure	8 1/4 in. (210 mm)

Product dimensions shown are subject to normal manufacturing tolerances of +/- 1/8 in. (3 mm) on the shingle's length and width.

ULTRA HP® IR / ULTRA HP®

4 Applicable Standards¹

ASTM D3462 Product Standard

ASTM D3018 Product Standard

ASTM D3161 Class F Wind Test

ASTM D7158 Class H Wind Test

ASTM E108 Class A Fire Test²

UL 790 Class A Fire Test²

CAN/ULC S107 Class A Fire Test (Canada)²

UL 2218 Class 4 Impact Resistance Test⁵
(UltraHP IR only)

CSA A123.5 Product Standard (Canada)

Texas Department of Insurance Details [here](#)

NOTE: IKO UltraHP IR / UltraHP asphalt shingles meet or exceed the requirements in the product standards referenced at the time of manufacture.


5 Color Pairings

View All Color Pairings on the next page →

6 Safety Information

CAUTION: Working at heights on sloped-roof surfaces can be dangerous. Do not install until all appropriate safety precautions are followed. Always wear appropriate personal protective equipment (PPE), including appropriate fall protection equipment.

7 Shingle Installation

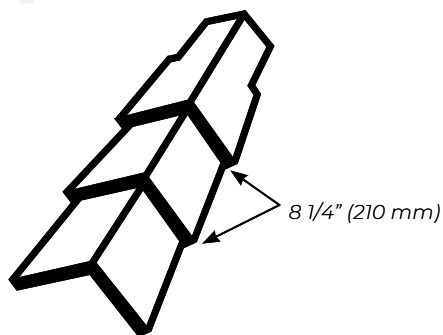

Shingles must be installed according to all of IKO's application instructions. Some select installation requirements are highlighted here:

1. The space beneath the roof deck (e.g., attic) should be thoroughly ventilated to minimum local building code requirements.
2. Apply the shingles with an 8 1/4-inch exposure to the weather (even with the notch on the sides of the shingle).
3. Form the shingle to the roof deck prior to nailing. For lower slopes, it may be necessary to push down slightly on the center of the shingle. For steeper roofs, it may be necessary to push down slightly on the sides of the shingle.
4. When used in conjunction with a ridge vent, a vent width of 9 inches or less is required.
5. Cover the exposed nail heads of the final ridge cap shingle with roofing cement.



This product's Safety Data Sheet (SDS) is available [here](#).

Complete product installation details can be found [here](#).



ULTRA HP® IR / ULTRA HP®

5 Color Pairings

Cambridge⁴ / Cambridge Cool Colors Plus⁴

Amber Burst Cool Plus³
Arctic White Cool Plus³
Beachwood*
Canyon Oak Cool Plus³
Charcoal Grey
Dove White*
Driftwood
Dual Black
Dual Brown
Dual Brown Cool Plus³
Dual Grey
Dual Grey = Shoreline Grey
Earthtone Cedar
Graphite Black Cool Plus³
Harvard Slate
Harvard Slate Cool Plus³
Sand Dune Cool Plus³
Weatherwood
Weatherwood Cool Plus³

Nordic⁴

Cornerstone Wwd / Olde
Style Weatherwood
Driftshake
Glacier
Granite Black
Shadow Brown
Summit Grey = Charcoal Grey

Armourshake⁴

Complementary blend matches

Charcoal Grey = Greystone
Dual Black = Shadow Black
Driftwood = Chalet Wood
Olde Style Weatherwood /
Weatherwood = Weathered Stone

Crowne Slate⁴

Regal Stone
Royal Granite

Royal Estate⁴

Harvest Slate
Mountain Slate
Shadow Slate
Taupe Slate

Dynasty⁴ / Dynasty Cool Colors Plus⁴

Atlantic Blue⁶
Bayshore Cool Plus³ =
Biscayne
Biscayne
Coastal Sands Cool Plus³ =
Amber Burst
Cornerstone Wwd / Olde
Style Weatherwood
Driftshake
Dual Brown Cool Plus³ =
Dual Brown
Emerald Green
Frostone Grey
Glacier
Granite Black
Harbor Black
Monaco Red
Olde Style Weatherwood
Pebble Grey Cool Plus³ =
Dual Grey
Sentinel Slate
Shadow Brown
Graphite Black Cool Plus³ =
Graphite Black
Wwd Cool Plus³ =
Weatherwood

*Available in select markets

The information on this Technical Data Sheet is based upon data considered to be true and accurate at time of issue, based on laboratory tests and production measurements, and is offered solely for the user's consideration, investigation and verification. Nothing contained herein is representative of a warranty or guarantee for which the manufacturer can be held legally responsible. The manufacturer does not assume any responsibility for any misrepresentation or assumptions the reader may formulate. To confirm the most current product technical information and compliances, please contact IKO directly at: **United States 1-888-IKO-ROOF** (1-888-456-7663); **Canada 1-855-IKO-ROOF** (1-855-456-7663).

¹Compliance with listed product standards is based on sampling and testing of products as manufactured. ²When shingles are installed over an approved underlayment. ³Only available in UltraHP. ⁴Please note either UltraHP or UltraHP IR can be used with IKO laminate shingles. However, only UltraHP IR should be used if a full roof system impact rating is required or desired. ⁵IKO UltraHP® IR hip and ridge shingles have a Class 4 impact resistance rating tested against UL 2218, which IKO is pleased to present for the sole purpose of enabling homeowners using these shingles in conjunction with Class 3 or Class 4 impact resistance rated shingles to obtain a discount on their home insurance premiums, if available in their area. This rating is not to be construed as any type of express or implied warranty or guarantee of the impact performance of this shingle by the manufacturer, supplier or installer. ⁶Blue granules may fade after extensive exposure to the sun's ultraviolet rays.

Note: Ultra HP – stocked in select IKO plants and warehouses in Western U.S., in select colors. Ultra HP IR – stocked in select IKO plants and warehouses in U.S./Canada, in select colors.