


ROOF ACCESSORIES—DURA-HATCH DOMED EQUIPMENT SERIES—REHV

Dur-Red's double leaf domed equipment hatches are ideal for equipment installation and servicing from the roof. Now, with R6 polyisocyanurate insulation and durable factory finish powder coat.

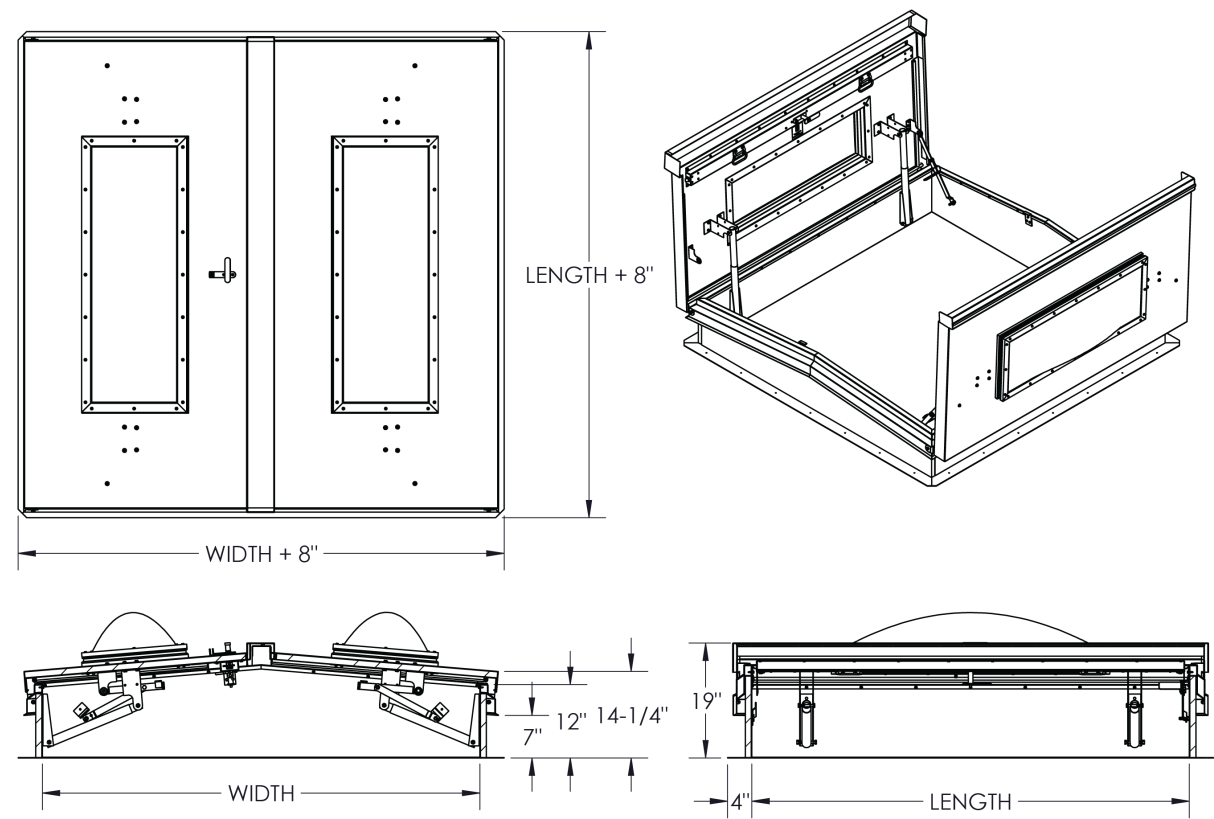

SPECIFICATIONS:

- Material:** Steel- 14 gauge galvalume steel curb and cover with 22 gauge galvalume steel cover liner. Aluminum—11 gauge aluminum curb and cover with 18 gauge aluminum cover liner.
- Finish:** Powder coat gray texture on steel, powder coat silver texture on aluminum.
- Domes:** Clear over white polycarbonate domes
- Gasket:** Weatherproof EPDM sponge rubber adhesive-backed seal
- Insulation:** 1" polyisocyanurate (R-6) on curb and in cover
- Hinges:** Heavy-duty galvalume steel or aluminum hinge with bolt pin
- Hold-Open Arm:** Clear zinc-plated steel hold-open arm
- Latches:** Two point universal spring latches on each cover with exterior and interior handles
- Spring:** Pressure intensifiers with compression springs provide lift assistance
- Sizes:** Minimum: 72" x 72" Maximum: 72" x 96"
- Clear Opening:** Minus 8" on width and minus 8" on length

ACCESSORIES SOLD SEPARATELY:

Bolt-on Safety Railing (RSHWB)



DUR-RED PRODUCTS
 9702 Newton Av S. Bloomington, MN 55431

 800-554-6077
 sales@activarcpg.com
 www.activarcpg.com

Distributor:		Project:
Contractor:		Approved By:
Date:	Quantity:	Architect:
Scale: N/A	Pages: 1 of 2	Item #

© 2025 Activar Construction Products Group, Inc.

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE SOLE PROPERTY OF ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC. ANY REPRODUCTION IN PART OF AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC. IS PROHIBITED.

6/19/2025

COMMON SIZES—REHV

QTY	MODEL	MATERIAL	CURB OPENING	CLEAR OPENING	APPROX WT—lbs
	REHVA-7272ST	Aluminum	72" x 72"	64" x 64"	255
	REHVA-7296ST	Aluminum	72" x 96"	64" x 88"	395
	REHVG-7272GT	Steel	72" x 72"	64" x 64"	520
	REHVGA-7272ST	Steel Curb & Aluminum Cover	72" x 72"	64" x 64"	350
	REHVGA-7296ST	Steel Curb & Aluminum Cover	72" x 96"	64" x 88"	525

MADE-TO-ORDER REHV: EXAMPLE—REHVGA-7474PG-VPCW

REHV	MATERIAL		- WIDTH LENGTH		FINISH	-	OPTIONS			
☐	G	Galvanneal			☐	GT	Powder Coat Gray Texture (Std for REHVG)	☐	CD	Double Wall Curb
☐	A	Aluminum			☐	ST	Powder coat Silver Texture (Std for REHVA, REHVGA)	☐	CM	Curb Mount
☐	GA	Steel Curb, Aluminum Cover						☐	Hxx	Optional Curb Height - Enter Size Below Specify Curb Height from 13" to 22"
								☐	IS	1" Fiberboard Insulated Curb
								☐	IT	2" Polyiso Insulated Curb
								☐	IW	1" x 6" Wood Nailor Top/Polyiso Bottom of Curb
								☐	SS	Stainless Hardware (excluding zinc plated steel center operator)
								☐	VPW	Polycarbonate Single White

It is the responsibility of the customer to communicate specific and detailed product performance requirements that are needed for their application. This document is intended to convey potential product configurations and offerings. It is not to be used to imply or represent a specification or rating, of finished products shipped. Detailed, specific submittals can be created upon request. It is the responsibility of the customer to specify product accordingly to comply with local laws, codes, and ordinances.