

# Marino\WARE® Product Submittal Data


**PRODUCT NAME:** Tabbed Track

**MARINO\WARE PART #** 400TT20

**PROPERTIES:**

<b>A. (in)</b>	4	<b>Yield Strength Fy (KSI)</b>	40
<b>B. (in)</b>	2-1/4	<b>Mils</b>	33
<b>C. (in)</b>	1	<b>Gauge</b>	20
<b>Available Finish</b>	G40, G60	<b>Design Thickness (in)</b>	0.0346
		<b>Minimum Thickness (in)</b>	0.0329

### 09.22.16 Non Structural Metal Framing

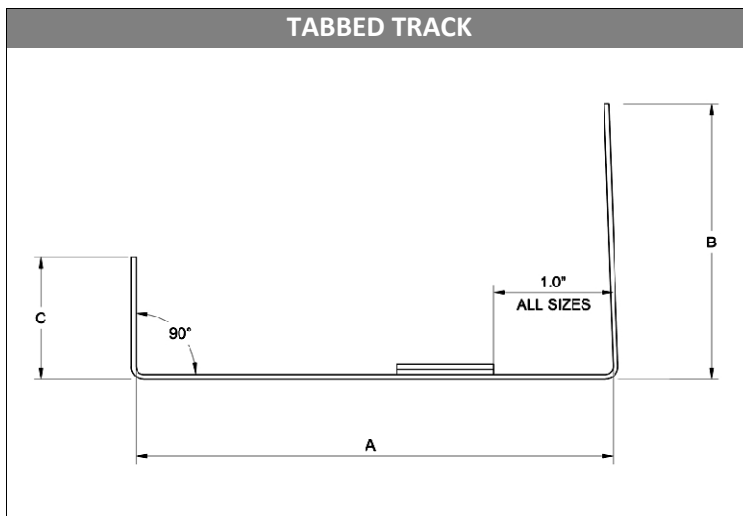

**CODES & STANDARDS**

- AISI S100 - 2001 with 2004 Supplement compliant
- ASTM C 645 (18 mil - 33 mil) compliant. ASTM C 955 (43 mil) compliant
- Galvanized steel sheet meets ASTM A 1003 & A 653

**GREEN INFO** LEED® v3

Available LEED® points in the following categories:

- MR Credit 2 - Construction Waste Management (1-2 points)
- MR Credit 4 - Recycled Content (1-2 points)
- MR Credit 5 - Regional Materials (1-2 points)

- Total Recycled Content: 34.9%
- Post Consumer Content: 24.3%
- Pre Consumer (Post Industrial) Content: 9.4%



[www.marinoware.com](http://www.marinoware.com)

For more information, please contact Marino\WARE Technical Services at 866-545-1545.

This technical information reflects the most current information available and supersedes any and all publications, effective 10/1/2011  
©Copyright 2011 by Ware Industries, Inc. All rights reserved