

Marino\WARE® Product Submittal Data

PRODUCT NAME: 250VS125-33

MARINO\WARE PART # 212VS33

PROPERTIES:

A. Web (in)	2-1/2	Yield Strength Fy (KSI)	33
B. Flange (in)	1-1/4	Design Thickness (in)	0.0346
C. Lip (in)	1/4"	Minimum Thickness (in)	0.0329
Mils	33	Gauge	20 STR
Finish	G60		

SECTION PROPERTIES

GROSS SECTION PROPERTIES

Weight of Member: (lb/ft)	0.610
Cross Sectional Area: A (in ²)	0.178
Moment of Inertia: Ix (in ⁴)	0.183
Radius of Gyration: Rx (in)	1.010
Gross Moment of Inertia: Iy (in ⁴)	0.036
Gross Radius of Gyration: Ry (in)	0.447

EFFECTIVE SECTION PROPERTIES

Moment of Inertia-Deflection: Ix (in ⁴)	0.181
Section Modulus: Sx (in ³)	0.137

MOMENTS

Allowable Bending Moment: Ma (in-k)	2.650
Local Buckling Nominal Moment: Mnl (in-k)	4.530
Distortional Buckling Moment: Mnd (in-k)	4.420

LIMITING HEIGHTS - COMPOSITE (ft-in)

Spacing (in)	5 psf			7.5 psf			10 psf		
	L/120	L/240	L/360	L/120	L/240	L/360	L/120	L/240	L/360
12	19-4	15-4	13-5	16-10	13-5	11-8	15-4	12-2	10-8
16	17-7	13-11	12-2	15-4	12-2	10-8	13-11	11-1	9-8
24	15-4	12-2	10-8	13-5	10-8	9-2	12-0	9-8	-

Composite heights sheathed both sides full height with 5/8" Type X wallboard applied vertically.
Acceptable wallboards are 5/8" type X from: USG, National, GP, Temple, American, Continental & CertainTeec

CODES & STANDARDS



- Meets IBC 2009, 2012, 2015 & FBC 2017
- Meets or tested to: ASTM C 645, C 754, E 90, E 119 & AISI S220-11
- Galvanized steel sheet meets ASTM A 1003 & A 653
- Third Party Code Evaluation Report: ICC ES ESR#2620
- Multiple Fire Rated Assemblies

GREEN INFO

- LEED v3 & LEED v4 credits available
- Contact Technical Services for more information



09.22.16 Non-Structural Metal Stud

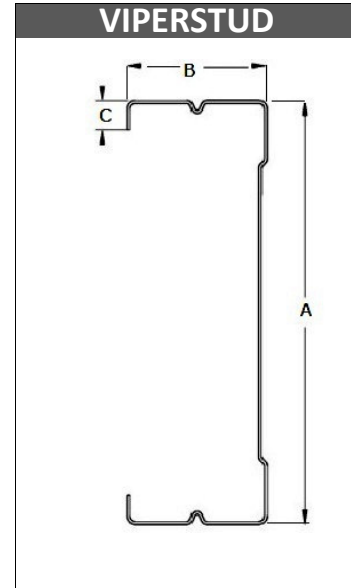

For more information, please contact Marino\WARE Technical Services at 866-545-1545

This technical information reflects the most current information available and supersedes any and all publications, effective 1/30/2018.

©Copyright 2018 by Ware Industries, Inc. All rights reserved