


## Member Designator **800S162-43**

Coating CP60

## Physical Properties

Design Thickness 0.0451 in  
 Mil 43 mil  
 Gauge 18 Gauge  
 Web Width 8.00 in  
 Flange Width 1.625 in  
 Stiffening Lip 0.50 in  
 Yield Strength 33 ksi

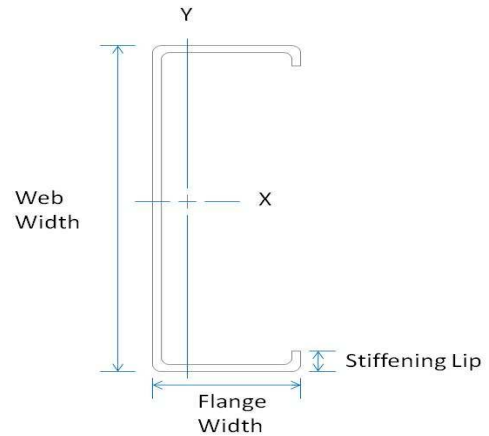

## Gross Properties


Area (in <sup>2</sup> )	Weight (lb/ft)	I <sub>x</sub> (in <sup>4</sup> )	S <sub>x</sub> (in <sup>3</sup> )	R <sub>x</sub> (in)	I <sub>y</sub> (in <sup>4</sup> )	R <sub>y</sub> (in)
0.537	1.83	4.633	1.158	2.937	0.160	0.546

## Effective Properties

I <sub>x</sub> (in <sup>4</sup> )	S <sub>x</sub> (in <sup>3</sup> )	M <sub>a</sub> (in-k)	V <sub>ag</sub> (lb)
4.500	1.019	20.14	1051

## Torsional Properties

J <sup>x1000</sup> (in <sup>4</sup> )	C <sub>w</sub> (in <sup>6</sup> )	X <sub>o</sub> (in)	m (in)	R <sub>o</sub> (in)	β
0.364	2.076	-0.926	0.601	3.128	0.912

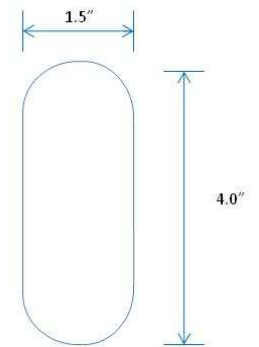

Structural Punch

## Limiting Wall Heights – Curtain Wall

Section	Spacing (in) o.c.	5 psf			15 psf			20 psf			25 psf		
		L/120	L/240	L/360	L/240	L/360	L/600	L/240	L/360	L/600	L/240	L/360	L/600
800S162-43	12	49' 6"	41' 3"	34' 4"	27' 3"	23' 9"	20' 0"	24' 9"	21' 7"	18' 2"	22' 11"	20' 0"	16' 11"
800S162-43	16	44' 11"	37' 8"	31' 2"	24' 9"	21' 7"	18' 2"	22' 5"	19' 7"	16' 6"	20' 10"	18' 2"	15' 4"
800S162-43	24	39' 3"	32' 2"	27' 3"	21' 7"	18' 10"	15' 11"	19' 7"	17' 2"	14' 5"	18' 2"	15' 11"	13' 5"

Section	Spacing (in) o.c.	30 psf			35 psf			40 psf			50 psf		
		L/240	L/360	L/600	L/240	L/360	L/600	L/240	L/360	L/600	L/240	L/360	L/600
800S162-43	12	21' 7"	18' 10"	15' 11"	20' 6"	17' 11"	15' 1"	19' 7"	17' 2"	14' 5"	18' 2"	15' 11"	13' 5"
800S162-43	16	19' 7"	17' 2"	14' 5"	18' 8"	16' 3"	13' 9"	17' 10"	15' 7"	13' 1"	16' 6"	14' 5"	12' 2"
800S162-43	24	17' 2"	14' 11"	12' 7"	16' 3"	14' 2"	12' 0"	15' 7"	13' 7"	11' 5"	14' 3"	12' 7"	10' 8"

## General Notes

- Physical properties and load tables have been calculated in conformance with the 2001 NASPEC for the Design of Cold-Formed Steel Structural Members, including the 2004 Supplement, and the IBC 2006, unless noted otherwise.
- All structural framing members have a protective coating conforming to ASTM C 955.
- Reference ASTM specification A 1003/A 1003 M table 1 for the universe of allowable coatings for light gauge steel framing.
- Stud/joists are manufactured to custom lengths. Stud/joists are manufactured with punched webs unless otherwise specified at time of order.
- Track is produced in standard lengths of 10 feet unless a custom track length is indicated. Track is manufactured with unpunched webs.
- Structural framing members are marked with product information per the requirements of ASTM C 955 section 12.
- All delivered material must be kept dry, preferably by being stored inside a building under a roof. If it is necessary to store material outside, it must be stacked off the ground, properly supported on a level platform, and fully protected from the weather. Reference ASTM C 754 section 8 and ASTM C 1007 section 4.

## LEED Green Building Credits

MR Credit 2: Construction Waste Management – MBA steel framing is 100% recyclable.

MR Credit 4: Recycled Content – MBA steel framing is formed from no less than 25.5% post-consumer and 6.8% pre-consumer recycled content.

MR Credit 5: Regional Materials – MBA has manufacturing facilities in multiple states.