


Sales: (888)248-8076 Fax: (847)680-7883 www.mbastuds.com

Submittal Data – Structural Track

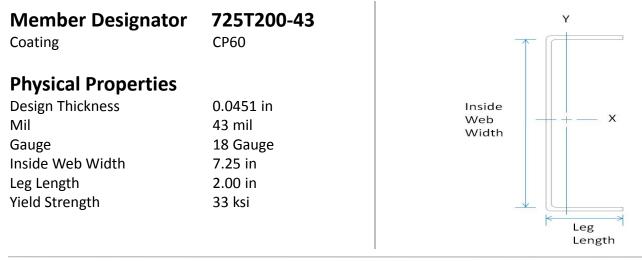

| | Gross Properties | | | | | | |
|------------------|--------------------|---------|--------------------|-------|-------|--------------------|-------|
| Cuese Duenenties | Area | Weight | Ix | Sx | Rx | ly | Ry |
| Gross Properties | (in ⁻) | (lb/ft) | (in ⁴) | (in³) | (in) | (in [⁼]) | (in) |
| | 0.507 | 1.73 | 3.872 | 1.045 | 2.764 | 0.171 | 0.581 |

Effective Properties

| lxe | Sxe | Ma | Vag (Ib) | |
|--------------------|--------------------|--------|-------------|--|
| (in ⁴) | (in ³) | (in-k) | | |
| 3.361 | 0.678 | 13.39 | 1137 | |

Torsional Properties

| Torsional | | | | | | |
|-----------------------|--------------------|--------|-------|-------|-------|--|
| J ^{x1000} Cw | | Xo m | | Ro | β | |
| (in ⁴) | (in ⁶) | (in) | (in) | (in) | | |
| 0.344 | 1.695 | -0.958 | 0.610 | 2.982 | 0.897 | |

General Notes

- 1. Physical properties and load tables have been calculated in conformance with the 2001 NASPEC for the Design of Cold-Formed Steel Structural Members, including the 2004 Supplement, and the IBC 2006, unless noted otherwise.
- 2. All structural framing members have a protective coating conforming to ASTM C 955.
- 3. Reference ASTM specification A 1003/A 1003 M table 1 for the universe of allowable coatings for light gauge steel framing.
- 4. Stud/joists are manufactured to custom lengths. Stud/joists are manufactured with punched webs unless otherwise specified at time of order.
- 5. Track is produced in standard lengths of 10 feet unless a custom track length is indicated. Track is manufactured with unpunched webs.
- 6. Structural framing members are marked with product information per the requirements of ASTM C 955 section 12.
- 7. All delivered material must be kept dry, preferably by being stored inside a building under a roof. If it is necessary to store material outside, it must be stacked off the ground, properly supported on a level platform, and fully protected from the weather. Reference ASTM C 754 section 8 and ASTM C 1007 section 4.

LEED Green Building Credits

MR Credit 2: Construction Waste Management – MBA steel framing is 100% recyclable.

MR Credit 4: Recycled Content – MBA steel framing is formed from no less than 25.5% post-consumer and 6.8% pre-consumer recycled content. MR Credit 5: Regional Materials – MBA has manufacturing facilities in multiple states.

