

Metal Sales Manufacturing Corporation

This specification data sheet is provided by Metal Sales Manufacturing Corporation as a technical support tool incident to the sale of its IC72-Panel, 7/8" Corrugated and PBR-Panel metal panel products. Contact Metal Sales for more information on these and other products.

Telephone: 800.406.7387
 metalsales.us.com

Section 07 42 13 - METAL WALL PANELS

1. PRODUCT NAMES

IC72-Panel, 7/8" Corrugated and PBR-Panel metal wall panels

2. MANUFACTURER

Metal Sales Manufacturing Corporation
 7800 State Road 60
 Sellersburg, IN 47172
 Toll Free: 800.406.7387
 Phone: 502.855.4300
 Fax: 502.855.4200
 Web: metalsales.us.com
 E-Mail: rgage@metalsales.us.com


3. PRODUCT DESCRIPTION

Basic Use

For more than 60 years, Metal Sales has earned a reputation as the premier provider of metal building components and accessories. Metal Sales maintains the industry's largest professional sales and service team, supported by 21 branches located throughout the United States and offers a full line of high quality metal roof and wall panels for agricultural, commercial, architectural, industrial and residential projects of every shape and size for both new construction and retrofit applications. Metal Sales is dedicated to leading the metal building component industry, by setting new standards for operating efficiency, product design, active service management and lasting value.

Manufacturer Memberships and Affiliations

CRRC - Cool Roof Rating Council
 MCA - Metal Construction Association
 NRCA - National Roofing Contractors Association
 ILFI - International Living Future Institute
 MasterSpec

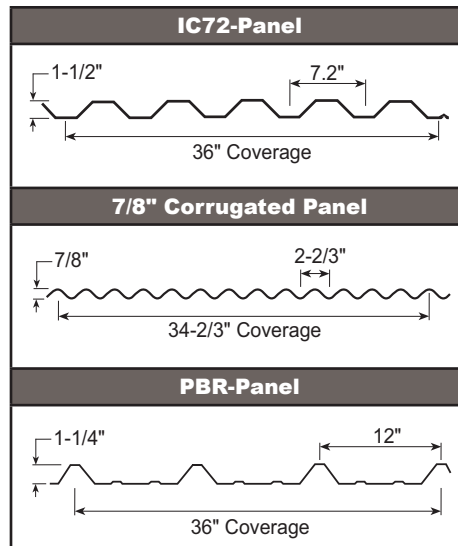

4. TECHNICAL DATA

Applicable Standards

- ASTM A 653 – Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process
- ASTM A 792 – Standard Specification for Steel Sheet, 55% Aluminum-Zinc Alloy-Coated by the Hot-Dip Process
- ASTM B 209 – Standard Specification for Aluminum and Aluminum-Alloy Sheet and Plate
- ASTM D 2244 – Standard Practice for Calculation of Color Tolerances and Color Differences from Instrumentally Measured Color Coordinates
- ASTM D 4214 – Standard Test Methods for Evaluating the Degree of Chalking of Exterior Paint Films
- ASTM E 84 – Standard Test Method for Surface Burning Characteristics of Building Materials
- ASTM E 283 - Standard Test Method for Determining Rate of Air Leakage Through Exterior Windows, Curtain Walls, and Doors Under Specified Pressure Differences Across the Specimen
- ASTM E 330 – Standard Test Method for Structural Performance of Exterior Windows, Doors, Skylights and Curtain Walls by Uniform Static Air Pressure Difference
- ASTM E 331- Standard Test Method for Water Penetration of Exterior Windows, Skylights, Doors, and Curtain Walls by Uniform Static Air Pressure Difference
- ASTM E 1592 – Standard Test Method for Structural Performance of Sheet Metal Roof and Siding Systems by Uniform Static Air Pressure Difference



Silicon Valley Animal Center, Milpitas, CA

Underwriters Laboratories (UL):

- UL 263 - Fire Tests of Building Construction and Materials

Approval Organizations

Miami-Dade County Approval
 ICC-ES Evaluation Report
 2020 Florida Building Code

Physical Properties:

Test reports are available to design professionals upon request.

Note: Industry designation for material thickness is moving away from "gauge" to decimal thickness in inches. Metal Sales recommends use of a minimum thickness requirement of 0.018 inch (0.46 mm) instead of 26 gauge, 0.0230 inch (0.58 mm) instead of 24 gauge, 0.0296 inch (0.75 mm) instead of 22 gauge and 0.0356 inch (0.90 mm) instead of 20 gauge. For Galvalume-coated steel, specify AZ50 for painted material or AZ55 for unpainted material.

Technical Properties for IC72-Panel:

- Panel coverage: 36 inches (914.4 mm)
- Rib Height: 1-1/2 inches (38.1 mm)
- Material: Aluminum-zinc alloy-coated steel sheet, ASTM A 792, AZ50 or AZ55 coating designation, structural quality, Grade 50, 0.0180-inch (0.46-mm), 0.0230-inch (0.58-mm) or 0.0296-inch (0.75-mm) minimum thickness

► Material: Zinc-coated steel sheet, ASTM A 653, G90 coating designation, structural quality, Grade 33, 0.0356-inch (0.90-mm) or 0.0466-inch (1.18-mm) minimum thickness

Not all thicknesses are produced at all branches.

► Material: Aluminum sheet, ASTM B 209, 0.032-inch (0.81-mm) nominal thickness

► Attachment: Exposed, direct-fastened panel

► Application: Designed for application over open framing or solid substrate

► Rib Configuration: Trapezoidal

► Surface Finish: PVDF (Kynar 500) or Acrylic-Coated Galvalume

► Color: Contact Metal Sales for information on color availability.

► Testing: Fire Resistance Rating: Complies with UL 263

Air Leakage: 0.0148 cfm/sq. ft. when tested according to ASTM E 283

Water Penetration: None at 6.24 psf when tested according to ASTM E 331

Technical Properties for 7/8" Corrugated:

► Panel coverage: 34-2/3 inches (880.5 mm)

► Rib Height: 7/8 inch (22.2 mm)

► Material: Aluminum-zinc alloy-coated steel sheet, ASTM A 792, AZ50 or AZ55 coating designation, structural quality, Grade 50, 0.0180-inch (0.46-mm), 0.0230-inch (0.58-mm) or 0.0296-inch (0.75-mm) minimum thickness

► Material: Zinc-coated steel sheet, ASTM A 653, G90 coating designation, structural quality, Grade 33, 0.0356-inch (0.90-mm) minimum thickness

► Material: Aluminum sheet, ASTM B 209, 0.032-inch (0.81-mm) nominal thickness

► Attachment: Exposed, direct-fastened panel

► Application: Designed for application over open framing or solid substrate

► Rib Configuration: Sinusoidal

► Surface Finish: MS Colorfast45, PVDF (Kynar 500) or Acrylic-Coated Galvalume

► Color: Contact Metal Sales for information on color availability.

► Testing: Fire Resistance Rating: Complies with UL 263

Air Leakage: 0.004 cfm/sq. ft. when tested according to ASTM E 283

Water Penetration: None at 12 psf when tested according to ASTM E 331

► Approvals: Code and Testing Agency Approvals: 2020 Florida Building Code Approval 9482.1

Technical Properties for PBR-Panel:

► Panel coverage: 36 inches (914.4 mm)

► Rib Height: 1-1/4 inches (31.8 mm)

► Material: Aluminum-zinc alloy-coated steel sheet, ASTM A 792, AZ50 or AZ55 coating designation,



Silicon Valley Animal Center, Milpitas, CA

structural quality, Grade 50, 0.0180-inch (0.46-mm), 0.0230-inch (0.58-mm) or 0.0296-inch (0.75-mm) minimum thickness

► Material: Aluminum sheet, ASTM B 209, 0.032-inch (0.81-mm) nominal thickness

► Attachment: Exposed, direct-fastened panel

► Application: Designed for application over open framing or solid substrate

► Rib Configuration: Trapezoidal

► Surface Finish: MS Colorfast45, PVDF (Kynar 500) or Acrylic-Coated Galvalume

► Color: Contact Metal Sales for information on color availability.

► Testing: Fire Resistance Rating: Complies with UL 263

► Approvals: Code and Testing Agency Approvals: Miami-Dade County Approval NOA 20-0331.02
2020 Florida Building Code Approval: 9482.4

Environmental Considerations

Construction metals generally are readily recyclable at the end of their service life. The raw materials used in manufacture of metal wall panels also come from recycled sources. Pre-consumer and post-consumer recycled content varies. Consult with manufacturer for more information.

Fire Performance

In accordance with ASTM E 84:

Flame Spread Index: 25 or less (Class A)

Smoke Developed Index: 0

5. INSTALLATION

Handling and Storage

Handle and store product according to Metal Sales recommendations. Deliver materials in manufacturer's original, unopened, undamaged containers with identification labels intact. Store materials above ground, under waterproof covering, protected from exposure to harmful weather conditions and at temperature and humidity conditions recommended by manufacturer. Provide proper ventilation of metal panel system to prevent condensation build-up between each panel and trim or flashing component. Tilt stack to drain in wet conditions. Remove strippable plastic film before storage under high-heat conditions. Store products in manufacturer's unopened packaging until just prior to installation. Exercise caution in unloading and handling metal panel system to prevent bending, warping, twisting and surface damage.

Preparation

Install furring, angles, sub-purlins and other miscellaneous wall panel support members and anchor according to metal wall panel manufacturer's recommendations. Ensure panel support is in-plane. Limit in-plane variance to no more than a total of 1/4 inch (6 mm) on 10 feet (3 m).

Thermal Insulation Installation

Install polyethylene vapor retarder if required. Install blanket insulation if required, in compliance with installation requirements in Division 07 Section "Thermal Insulation".

Metal Wall Panel Installation

Verify that site conditions are acceptable for installation. Do not proceed with installation until unacceptable conditions are corrected. Comply with panel manufacturer's installation instructions including but not limited to special techniques, interface with other work and integration of systems. Fasten metal wall panels to supports with concealed clips at each standing-seam joint at location, spacing and using proper fasteners as recommended by panel manufacturer. Comply with installation tolerances as required.

Accessory Installation

Install accessories using techniques recommended by manufacturer and which will assure positive anchorage to building and weather tight mounting. Provide for thermal movement. Coordinate installation with flashings and other components. For Flashing and Trim, comply with performance requirements, manufacturer's written installation instructions and the SMACNA "Architectural Sheet Metal Manual". Provide concealed fasteners where possible and install units to true level. Install work with laps, joints and seams that will be permanently watertight.

Field Quality Control

If requested by Owner, provide manufacturer's field service consisting of product use recommendations and site visits for inspection of product installation in accordance with manufacturer's instructions.

Precautions, Cleaning and Protection

Touch-up paint is used to cover and protect unexpected scratches on the paint finish that may occur during installation of panel. Touch-up paint will not weather as well or at the same rate as the original system. Test in an area that will not be noticeable. Metallic paint colors are available at an additional charge. Minor differences in color and appearance are normal and to be expected.

To minimize possible differences in appearance, an entire project should be painted at one time, from one batch of paint, using the same application equipment. Additionally, fabricated panels, flat sheet and flashings should be oriented in the same direction.

After installation remove temporary coverings and protection of adjacent work areas. Repair or replace any installed products that have been damaged. Clean installed panels in accordance with manufacturer's instructions prior to Owner's acceptance. Remove and lawfully dispose of construction debris from Project site. Protect installed product and finish surfaces from damage during construction.

Building Codes

Current data on building code requirements and product compliance may be obtained from Metal Sales technical support specialists. Installation must comply with the requirements of authority having jurisdiction.

6. AVAILABILITY AND COST**Availability**

Metal Sales products are nationally distributed and supported from 21 convenient locations nationwide, including Alaska. Manufacturer has the ability to ship worldwide. Contact manufacturer for information on local availability.

Cost

Budget installed cost information may be obtained from a local Metal Sales distributor or directly from the manufacturer.

7. WARRANTY

Special Exposed Panel Finish Warranty: Manufacturer's standard form PVDF (Fluorocarbon System) Warranty for film integrity, chalk rating and fade rating in which manufacturer agrees to repair or replace panels that show evidence of deterioration within specified warranty period. Deterioration shall include, but is not limited to, color fading of more than 5 Hunter units when tested according to ASTM D 2244, chalking in excess of a No. 8 rating when tested according to ASTM D 4214 or cracking, checking, peeling or failure of paint to adhere to bare metal. Warranty Period for film integrity is 45 years and for chalk and fade rating is 35 years. Metal Sales warranty excludes surface deterioration due to physical damage and exposure to salt environments.

Special Exposed Panel Finish Warranty: Manufacturer's standard form (MS Colorfast45) proprietary two coat roll coated System Warranty for film integrity, chalk rating and fade rating in which manufacturer agrees to repair or replace panels that show evidence of deterioration within specified warranty period. Deterioration shall include, but is not limited to, color fading of more than 5 Hunter units on vertical applications or more than 6 Hunter units on non-vertical applications when tested according to ASTM D 2244, chalking in excess of a No. 8 rating on vertical applications or a No. 7 rating on non-vertical applications when tested according to ASTM D 4214, cracking, checking, peeling or failure of paint to adhere to bare metal or perforation. Warranty Period for film integrity is 45 years, chalk and fade rating for 30 years and perforation for 25 years for AZ50 material. Metal Sales warranty excludes surface deterioration due to physical damage and exposure to salt environments.

8. MAINTENANCE

No specific maintenance is required for properly installed Metal Sales wall panel products. Periodic panel inspection to verify system integrity, drainage functionality and repair of storm damage is advised.

9. TECHNICAL SERVICES

Technical assistance, including more detailed information, product literature, test results, project lists, assistance in preparing project specifications and arrangements for application supervision, is available by contacting Metal Sales.

10. FILING SYSTEMS

Additional product information is available from the manufacturer, upon request and from MasterSpec.



Silicon Valley Animal Center, Milpitas, CA