

VERTI-RIB™ Panel

Metal Sales

Striated

THE LOOK OF STANDING SEAM WITHOUT THE ADDED COST

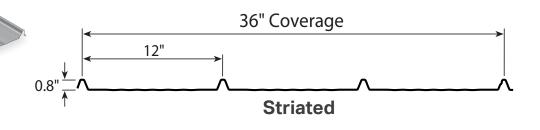

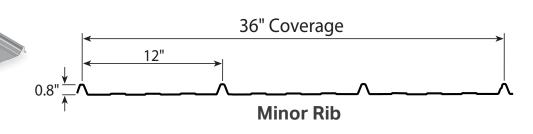

29 26 24 3

- Easy Installation over Open Framing or Solid Substrate
- 3:12 Minimum Roof Slope
- Up to 45 Year Finish Warranties Available
- Residential and Commercial Applications

VERTI-RIB™ Panel

Panel Specifications

Application	Roof and Wall
Min Roof Slope	3:12
Coverage	36"
Rib Height	0.8"
Min Panel Length*	5'-0"
Max Panel Length	45'-0"
Panel Profiles	Striated or Minor Rib
Attachment	Exposed Fastener

Panel Testing

UL 2218	Impact Resistance - Class 4
UL 263	Fire Resistance Rating - per assembly
UL 580	Uplift Resistance
ASTM E 455	Diaphragm Resistance

^{*}Panel lengths under 5'-0" are available for additional charge.

Finish Options

	-	
CF40	Steel Substrate	29 Gauge
	Painted Finish	ColorFit40™
	Paint Finish Warranty	40 Year
ELITE	Steel Substrate	29 Gauge - G100
	Painted Finish	MS Colorfast45®
	Paint Finish Warranty	45 Year
CF45	Steel Substrate	29 or 26 Gauge
	Painted Finish	MS Colorfast45®
	Paint Finish Warranty	45 Year
Pai	Steel Substrate	24 Gauge
	Painted Finish	PVDF
	Paint Finish Warranty	45 Year
ACG	Unpainted	29, 26 or 24 Gauge
	Finish	Acrylic-Coated
	Galvalume® Warranty	45 Year

