

INDUSTRIAL DOWNSPOUT

OPEN DOWNSPOUT, STYLE 1 DOWNSPOUT STRAP VERSION

INSTALLATION INSTRUCTIONS

DETERMINE OUTLET LOCATIONS AND FIELD CUT HOLE IN A NEAT WORKMANLIKE MANNER. INSERT ALUMINUM KYNAR OUTLET, FASTEN WITH TWO RIVETS IN EACH FLANGE AND SEAL, WITH NON-CURING SEALANT

GUTTER (IG-B SHOWN)

OUTLET

LARGE END

STANDARD ELBOW (STYLE A SHOWN)

SMALL END


LARGE END

DOWNSPOUT (12'-0" LENGTHS)


STYLE 1 DOWNSPOUT STRAP
2" WIDE
TYPICAL 3 PER 12'-0" LENGTH
OF DOWNSPOUT. MOUNTED
IN REAR OF DOWNSPOUT

2" WIDE DOWNSPOUT SPACER.
TYPICAL 3 PER 12'-0" LENGTH
OF DOWNSPOUT.

SMALL END
(2" NOTCH PROVIDED)

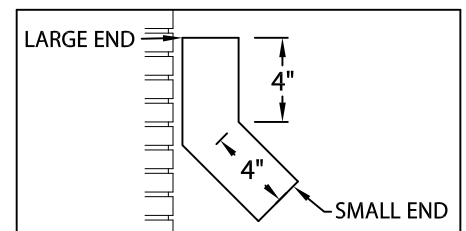

STYLE A DOWNSPOUT

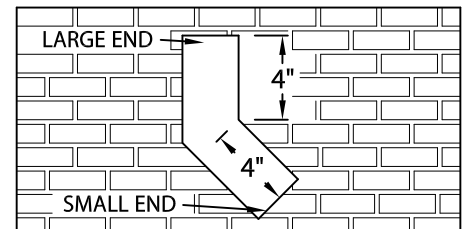

STYLE B DOWNSPOUT

DOWNSPOUT SECTION



1195 PRINCE HALL DRIVE
BELIOT, WI 53511
800-786-1492
WWW.MULEHIDE.COM

DATE: 04/12/24

DRN BY: MLM

CKD BY: MM

SHT.# ____ OF ____

DWG# 52113-42697

A