



Batter Washer

AR Batter Washers are designed to hold a lagstud at any angle up to 45° without need for wedging. Nail holes are provided for attaching the washers to the walers or strongbacks. Multiple lumber grips on the underside prevent slippage when the washers are not nailed. Available for all lagstud sizes.

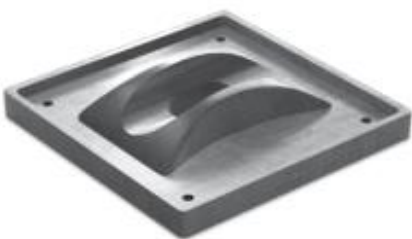

Bolt Diameter		Washer Dimensions		Washer Height	
mm	(in)	mm	(in)	mm	(in)
13 mm	(½")	89 mm x 89 mm	(3½" x 3½")	25 mm	(1")
22 mm	(⅞")	125 mm x 140 mm	(5" x 5½")	36 mm	(1⅞")
25 mm	(1")	165 mm x 165 mm	(6½" x 6½")	41 mm	(1⅝")
29 mm	(1⅛")	165 mm x 165 mm	(6½" x 6½")	39 mm	(1⅝")
35 mm	(1⅜")	170 mm x 170 mm	(6¾" x 6¾")	45 mm	(1¾")
38 mm	(1½")	175 mm x 175 mm	(7" x 7")	45 mm	(1¾")
41 mm	(1⅝")	175 mm x 175 mm	(7" x 7")	45 mm	(1¾")

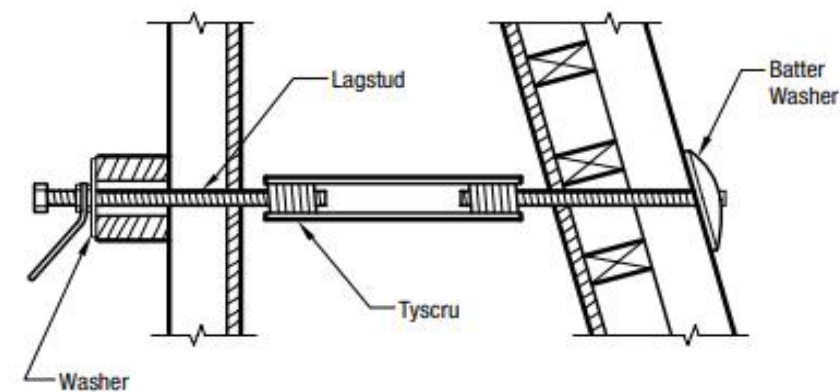

To order, please specify the following information

EXAMPLE

Name Batter Washer
Diameter 20 mm (¾")
Quantity 200