


## PRECAST RELEASE EL

Standard performance, general purpose, chemically and physically active concrete form release agent.

VOLATILE ORGANIC COMPOUND (VOC)  
REGULATORY COMPLIANCE

PRECAST RELEASE EL

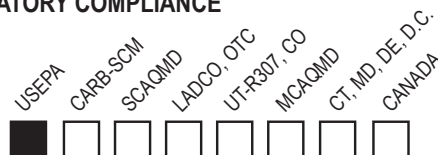

### HOW IT WORKS

PRECAST RELEASE EL (PR EL) contains a physical barrier component, as well as chemically active compounds that react with lime (calcium hydroxide) present in fresh concrete, to yield a slippery soap film on the form surface that prevents concrete sticking and improves form stripping.

### APPLICATIONS

- ◆ Can be used on most form surfaces, except foam or latex.

### ADVANTAGES

- ◆ Provides a crisp, positive release.
- ◆ Reduces form cleaning and maintenance costs. Forms become self-cleaning with continued use.
- ◆ Resists removal by foot traffic and rain.
- ◆ Can be used on forms that have been previously treated with competitive form oils.
- ◆ Ready to use.
- ◆ Product has a low odor.
- ◆ Can be stored at below freezing temperatures.
- ◆ Sprayable down to 0° F (-18° C) (liquid temperature).
- ◆ Protects metal and wood forms from weather damage prior to pour.
- ◆ Will not stain concrete surfaces and concrete can be painted with adequate surface preparation.
- ◆ Use to coat concrete mixing and placing equipment to prevent concrete buildup.
- ◆ Nonstaining form oil.
- ◆ For extremely cold temperatures, use RELEASE AGENT #10 450 or PRECAST RELEASE #80 450.

### ▲ PRECAUTIONS ▲

- ◆ Not generally recommended for use in architectural concrete applications.

### USE INSTRUCTIONS

- ◆ Request current product literature, labels and safety data sheets from manufacturer and read thoroughly before product use.
- ◆ Site environmental conditions, substrate conditions and construction have a major effect on product selection, application methods, procedures and rates, appearance and performance. Product literature provides general information applicable to some conditions. However, an adequate site test application by the purchaser or installer in advance of field scale use is mandatory (irrespective of any other verbal or written representations) to verify that product and quantities purchased can be satisfactorily applied and will achieve desired appearance and performance under intended use conditions.
- ◆ Application rates necessary to optimize performance vary with the form surface condition, porosity, concrete buildup (if any), concrete composition, concrete curing time, and temperatures.
- ◆ Ready to use. Requires no dilution.
- ◆ Can be applied by all conventional methods, but spray application is highly recommended.
- ◆ Apply to clean, reasonably dry forms using care to prevent contact with reinforcing steel.
- ◆ Avoid puddles, runs and excessive spray drift.
- ◆ Typical application rate range on an absorptive surface is 600-800 sf / gal. (15-20 sm / L). Typical application rate on non-absorptive surfaces is 1,500 sf / gal. (37 sm / L).

### TECHNICAL DATA

Color, ASTM D2300	0.5 - 1.0
Clarity	Clear
Odor	Mild
Flash Point	>200° F (94° C)
Bulk Density	7.2 lbs. / gal. (.86 kg / L)
VOC	<370 g / L

PRECAST RELEASE EL

Form Release Agent



chemical solutions to concrete problems

## **PACKAGING**

---

Packaged in 5 gal (19 L) pails, 55 gal (208 L) drums and 275 gal (1,041 L) totes.

## **SHELF LIFE**

---

Shelf life is two years. Use before the "USE BY" date stated on product packaging.

## **HANDLING/STORAGE**

---

Store in a dry location.

## **AVAILABILITY&TECHNICALSERVICES**

---

In addition to corporate offices in Omaha, Nebraska, Nox-Crete Inc. maintains regional offices and distribution centers in principal markets throughout the world. For source or technical information, call 800-669-2738 or 402-341-2080.

## **LIMITED WARRANTY**

---

### **NOTICE-READ CAREFULLY**

#### **CONDITIONS OF SALE**

NOX-CRETE offers this product for sale subject to, and Buyer and all users are deemed to have accepted, the following conditions of sale and limited warranty which may only be varied by written agreement of a duly authorized corporate officer of NOX-CRETE. No other representative of or for NOX-CRETE is authorized to grant any warranty or to waive limitation of liability set forth below.

#### **WARRANTY LIMITATION**

NOX-CRETE warrants this product to be free of manufacturing defects. If the product when purchased was defective and was within use period indicated on container or carton, when used, NOX-CRETE will replace the defective product with new product without charge to the purchaser.

NOX-CRETE makes NO OTHER WARRANTY, either express or implied, concerning this product. There is NO WARRANTY OF MERCHANTABILITY. In no case shall NOX-CRETE be liable for special, indirect or consequential damages resulting from the use or handling of the product and no claim of any kind shall be greater in amount than the purchase price of the product in respect of which damages are claimed.

#### **INHERENT RISKS**

NOX-CRETE MAKES NO WARRANTY WITH RESPECT TO THE PERFORMANCE OF THE PRODUCT AFTER IT IS APPLIED BY THE PURCHASER, AND PURCHASER ASSUMES ALL RISKS ASSOCIATED WITH THE USE OR APPLICATION OF THE PRODUCT.