


TECHNICAL DATA SHEET

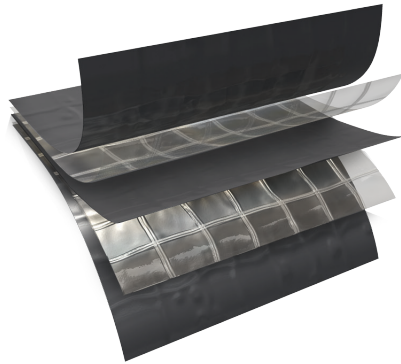

DESCRIPTION

Griffolyn® Type-85 is a 5-ply laminate combining three layers of high density polyethylene and two high-strength cord grids. It is specifically engineered to provide high strength and durability in a lightweight material.

PHYSICAL PROPERTIES AND TYPICAL VALUES

PROPERTY	ASTM TEST METHOD	U.S. VALUE	METRIC VALUE
Weight	D-3776	70 LB/1000 FT ²	34.2 KG/100 M ²
3" Tensile Strength	D-882	250 LBF	1112 N
Puncture Strength	D-4833	70 LBF	311 N
PPT Resistance	D-2582	60 LBF	267 N
Dart Impact Strength	D-1709	5 LBS	2270 g
Cold Impact Strength	D-1790	-60°F	-51°C
Permeance	E-96	0.027 Grain/Hr•Ft ² •in.Hg	1.551 NG/(PA•S•M ²)

Class B, ASTM E-1745-11 Standard Specification for Water Vapor Retarders Used in Contact With Soil or Granular Fill Under Concrete Slabs.

FEATURES AND BENEFITS

- Multiple layers and cord reinforcement resists tears.
- UV stabilization protects the material from degradation during extended exposure to sunlight.
- Cold-crack resistance eliminates failures in extremely cold temperatures.
- Chemically resistant to withstand exposure without significant deterioration.
- Low permeability greatly inhibits moisture transmission.
- Flexibility and light weight allow for easy handling and quick installation.
- Custom fabrication is available to meet your exact specifications.
- High durability allows for significant savings through reuse and fewer replacements.

MORE ▶▶

OUR CUSTOMERS DON'T JUST *cover their business,*
▶ THEY PROTECT IT



SUGGESTED APPLICATIONS

- Pallet, cable reel and drum covers for outside storage.
- Floor covers, dust partitions and cleanroom enclosures.
- Temporary walls, plant dividers, building enclosures and containment tents.
- Architectural vapor retarder for underslab, walls & ceilings and in roofing systems.
- Shipping container covers and liners.
- Soil covers to control leachate for stockpiles and landfills.
- Erosion control and slope protection covers.
- Agricultural storage systems, hay covers and windbreaks.
- Athletic field and equipment covers.

ORDERING INFORMATION

AVAILABLE COLORS:

Black

SIZES:

Rolls are available from 4' x 100' to 40' x 100' in increments of 4' widths. Some sizes available for immediate shipment. Standard length and width tolerances are $\pm 1\%$ (minimum 2")

Custom sizes up to 150' x 200' and custom fabrication are available to meet your exact specifications.

USABLE TEMPERATURE RANGE:

Minimum: -40°F -40°C

Maximum: 170°F 77°C

OUTDOOR EXPOSURE

Under normal continuous exposure the average life expectancy ranges from 36 to 48 months.



REEF INDUSTRIES, INC.

9209 Almeda Genoa Rd. • Houston, Texas 77075

P: 713.507.4251 • F: 713.507.4295

E-mail: ri@reefindustries.com • www.reefindustries.com

TOLLFREE 1.800.231.6074

The information provided herein is based upon data believed to be reliable. All testing is performed in accordance with ASTM standards and procedures. All values are typical and nominal and do not represent either minimum or maximum performance of the product. Although the information is accurate to the best of our knowledge and belief, no representation of warranty or guarantee is made as to the suitability or completeness of such information. Likewise, no representation of warranty or guarantee, expressed or implied, or merchantability, fitness or otherwise, is made as to product application for a particular use.