# **PRODUCT DATA SHEET**

# **QUICK CLIP** INSULATION ATTACHMENT SYSTEM

### **PRODUCT DESCRIPTION**


The Quick Clip insulation retaining system is ideal for holding insulation securely on tilt-up walls. Its quick and easy installation method helps reduce your overall costs. Suitable for use in metal buildings, wood framed and concrete construction.

#### FEATURE AND BENEFITS


- Easy Handling can be cut with standard power saws and two piece design allows for easy installation of the insulation
- Durable PVC is durable and will maintain its attractive finish for years
- Impact-Resistant PVC designed to withstand the impact of a nail gun without splitting
- Easy to Work With can be cut with standard power saws
- **UL Tested** Class A material, tested by Underwriters Laboratories (UL 723 test for surface burning characteristics of building materials). Flame spread is 0 and smoke developed equals 190.

#### INSTALLATION

- Step 1 Align the Quick Clips at widths appropriate for insulation size.
- Step 2 Nail or staple the Quick Clips into place.
- Step 3 Slide/fit insulation into clip.



**Quick Clip Insulation Attachment System** 

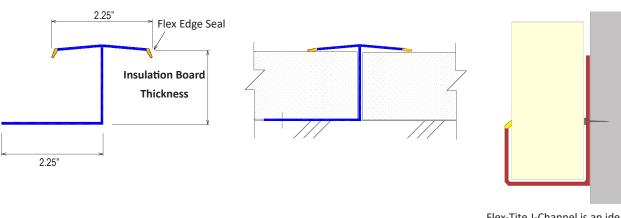


#### Flex-Tite J-Channel is an ideal way to finish edges when used with the Quick Clip System.

# MANUFACTURED BY VICTORY BEAR, A DIVISION OF FUKUVI-USA, INC. / SOLD BY RMAX



# **TWO-PIECE FLEX-TITE INSULATION ATTACHMENT SYSTEM**

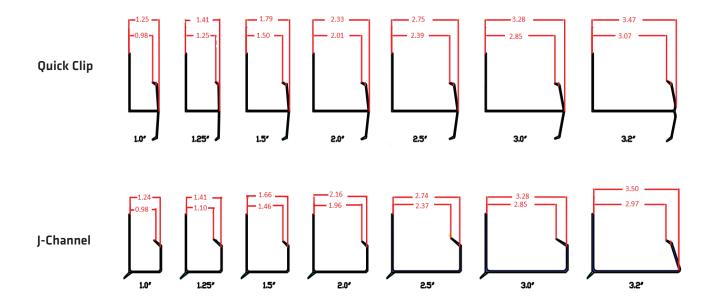

INSULATION BOARD SIZING CHART		
ECOMAXCI <sup>°</sup> FR WHITE THICKNESS	QUICK CLIP PART #	J-CHANNEL PART #
1.0"	1552	1540
1.25″	861	751
1.5″	1551	769
2.0"	1553	1541
2.5″	1555	1153
3.0"	1554	1547
3.2"	1559	1560
All Insulation Retainers are 10ft /niece, 20 nieces/box		

All Insulation Retainers are 10ft./piece, 20 pieces/box.

Storage: material should be stored out of direct sunlight to prevent long-term deterioration or color fading. Pieces can be stacked, but should be stored fully supported to keep them from warping.

PROPERTIES		
Coefficient of Linear Expansion	.0132 inches per degree F	

WARNING: Quick Clip Insulation Clips may exhibit gaps due to differences in the tolerance of the insulation clips and that of the insulation.



Proudly Made and Engineered in the U.S.A.



**RMAX SALES OFFICES / PLANT** 

**Central** 13524 Welch Road Dallas, TX 75244 (P) 972-387-4500 (F) 972-387-4673 East 1649 South Batesville Road Greer, SC 29650 (P) 864-297-1382 (F) 864-234-7548 West 210 Lyon Drive Fernley, NV 89408 (P) 775-575-4849 (F) 775-575-5035 PRODUCT DATA SHEET QUICK CLIP INSULATION CLIP Revision.03-05-2020



rmax@rmax.com / www.rmax.com