



Sikalastic® 500

LIQUID APPLIED SILICONE ROOF COATING

- Single component, Easy to apply, Easy to transport
- Highly UV resistant , Non-yellowing
- Ultra high solids formula
- Excellent adhesion to a variety of roof surfaces
- Retains its integrity from low temperatures to 250°F
- Meets California VOC and SCAQMD, CRRC Rated, Miami Dade Approved
- Resistant to ponding water - Ideal for roof refurbishment solutions
- Seamless weatherproofing system

Sikalastic® 500


EASY TO APPLY, DURABLE, LOW COST MAINTENANCE SYSTEM

APPLICATIONS

- SYSTEM PROVIDES TENACIOUS ADHESION WITH AN EXISTING ROOF SYSTEM TO FORM A MONOLITHIC MEMBRANE
- EXISTING ROOFS INCLUDE BUT ARE NOT LIMITED TO MODIFIED BITUMEN/BUILT-UP ROOFS, CONCRETE, EPDM/HYPALON, PVC, TPO, AND METAL
- LOCAL REINFORCEMENT TO SEAMS AND DETAILS

ADVANTAGES

- ABLE TO WITHSTAND PONDING WATER
- RECOAT TIME MAXIMUM OF 7 DAYS BETWEEN COATS
- UV RESISTANT
- VOC COMPLIANT: PRODUCT IS CERTIFIED TO BE DISTRIBUTED IN 50 STATES
- INFREQUENT AND LOW MAINTENANCE COSTS

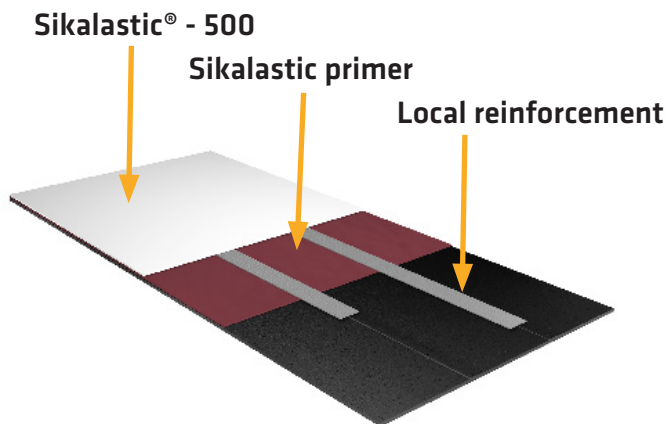

PRIMERS

Sikalastic® - 501 Primer:

metal³, MOD-BIT^{2,3}, BUR^{2,3}, and as a rust inhibitor

Sikalastic® - 502 Primer:

Concrete^{1,3}, brickwork³, wood³, metal³, polyurethane coating/foam³, acrylic coatings³

Sikalastic® - 503 Primer:

PVC/TPO³

Sikalastic® - 504 Primer:

EPDM/Hypalon³

Abrading³:

Is required for metals, lead, aluminum, stainless steel

1. New cementitious substrates must be Portland base and cured a min 14-days
2. The presence of volatiles may cause discoloration of Sikalastic® 500 if not properly primed
3. Surface evaluation and field adhesion testing may be required

COLORS & PACKAGING

White - 5-gal pail (stocked), 50-gal drum (MTO)

Light Grey - 5-gal pail (stocked), 50-gal drum (MTO)

Tan (MTO) - 5-gal pail, 50-gal drum

Custom Colors (MTO) - 5-gal pail (40-gal min)



Our most current general sales conditions shall apply.
Please consult the Product Data Sheets prior to any use and processing



SIKA CORPORATION - ROOFING & WATERPROOFING

100 Dan Road • Canton, MA 02021 • USA

Tel: 888-509-3350

Fax: 781-828-5365

usa.sika.com/roofing

© Sika Corporation / 12.2211.5 / 09/2025

BUILDING TRUST

