


# MIRAFI FW500

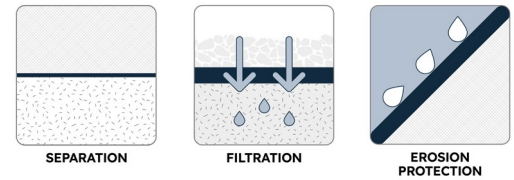

MIRAFI® FW500 geotextile is composed of high-tenacity monofilament and fibrillated polypropylene yarns, which are woven into a stable network such that the yarns retain their relative position. MIRAFI FW500 geotextile is inert to biological degradation and resists naturally encountered chemicals, alkalis, and acids.

TenCate Geosynthetics Americas (A Solmax Company) is accredited by Geosynthetic Accreditation Institute – Laboratory Accreditation Program ([GAI-LAP](#)).

MIRAFI FW500 meets Build America, Buy America Act, Pub. L. No. 117-58, div. G §§ 70901-52. |

MECHANICAL PROPERTIES	TEST METHOD	UNIT	MINIMUM AVERAGE ROLL VALUE	
			MD	CD
Tensile Strength (at ultimate)	ASTM D4595	lbs (N)	375 (1669)	375 (1669)
Tensile Elongation (at ultimate)	ASTM D4632	%	15	7
Trapezoid Tear Strength	ASTM D4533	lbs (N)	120 (534)	120 (534)
CBR Puncture Strength	ASTM D6241	lbs (N)	1200 (5340)	
			MINIMUM ROLL VALUE	
Percent Open Area	COE-02215	%	3	
Permittivity	ASTM D4491	sec <sup>-1</sup>	0.2	
Flow Rate	ASTM D4491	gal/min/ft <sup>2</sup> (l/min/m <sup>2</sup> )	15 (611)	
			MAXIMUM OPENING SIZE	
Apparent Opening Size (AOS)	ASTM D4751	U.S. Sieve (mm)	50 (0.30)	
			MINIMUM TEST VALUE	
UV Resistance (at 500 Hours)	ASTM D4355	% strength retained	70	
PHYSICAL PROPERTIES		UNIT	TYPICAL ROLL VALUE	
Roll Dimensions (width x length)		ft (mm)	15 x 300 (4.57 x 91.4)	
Roll Area		yd <sup>2</sup> (m <sup>2</sup> )	500 (418)	
Roll Weight		lbs (kg)	282 (128)	

365 South Holland Drive Pendergrass, GA 30567

Tel +1 706 693 2226 [www.tencategeo.us](http://www.tencategeo.us)



Solmax is not a design or engineering professional and has not performed any such design services to determine if Solmax's goods comply with any project plans or specifications, or with the application or use of Solmax's goods to any particular system, project, purpose, installation, or specification.  
FGS000016 ETQR19

