

## PRODUCT SPECIFICATION DATA SHEET

# **VR TurfMix**

ENGINEERED GROWING MEDIA FOR VEGETATED ROOF ASSEMBLIES


## PRODUCT DESCRIPTION

**Description** Lightweight engineered substrate mix

of organic and inorganic material that

will support turf type plantings.

Options None

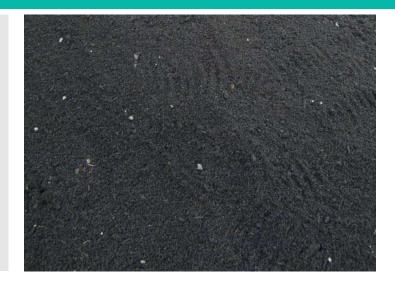

### **PRODUCT PROPERTIES**

**Porosity** 

Pore Volume > 45%

Air Filled Porosity > 10%

Saturated Hydraulic > 15-inches/hr (> 0.010 cm/sec)

Conductivity

Weight

Minimum Weight 40 - 70 lb/ft3

(Dry Weight) (0.64 - 1.12 g/cm<sup>3</sup>)

Maximum Weight 65 - 85 lb/ft3

(Saturated Weight) (1.05 - 1.36 g/cm<sup>3</sup>)

Moisture

Maximum Water 40 - 60%

Holding Capacity

*pH* 6.0 - 8.0

**EC** < 2.5

## Tremco Commercial Sealants & Waterproofing



## PRODUCT SPECIFICATION DATA SHEET

# VR TurfMix

ENGINEERED GROWING MEDIA FOR VEGETATED ROOF ASSEMBLIES

## **GUARANTEE/WARRANTY**

Tremco Incorporated warrants VR TurfMix Growing Media to be free of defects and to meet published physical properties when tested according to ASTM and Tremco standards. Under this warranty, we will provide, at no charge, VR TurfMix Growing Media to replace any VR TurfMix Growing Media proven to be defective when applied in accordance to our written instructions and in applications recommended by Tremco as suitable for this product will be replaced with like product at no charge.

#### THIS IS BUYER'S SOLE AND EXCLUSIVE REMEDY.

All claims concerning product defects must be made in writing within twelve (12) months of shipment. The absence of such claims in writing during this period will constitute a waiver of all claims with respect to such product. This warranty shall be IN LIEU OF any other warranty, express or implied, including but not limited to, any implied warranty of MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.



Tremco Roofing & Building Maintenance