

# TREMCO®

Commercial Sealants & Waterproofing

Tremco offers a broad selection of coatings for vehicular, pedestrian and speciality applications.

Vehicular Coatings





## Vulkem® 350NF / 346 / 346

### Benefits

- UV, impact, abrasion and chemical resistant
- Multiple standard colors available
- Bridges cracks
- Recoatable to extend service life
- Use with Tremco sealants for a comprehensive system warranty
- Safeguards concrete surfaces and steel reinforcement (post tension cables/anchors/rebar, etc.) against environmental contaminants
- Miami-Dade NOA approval and SWRI validation



# VEHICULAR COATINGS Vulkem® 350NF / 346 / 346

## BACKROLL

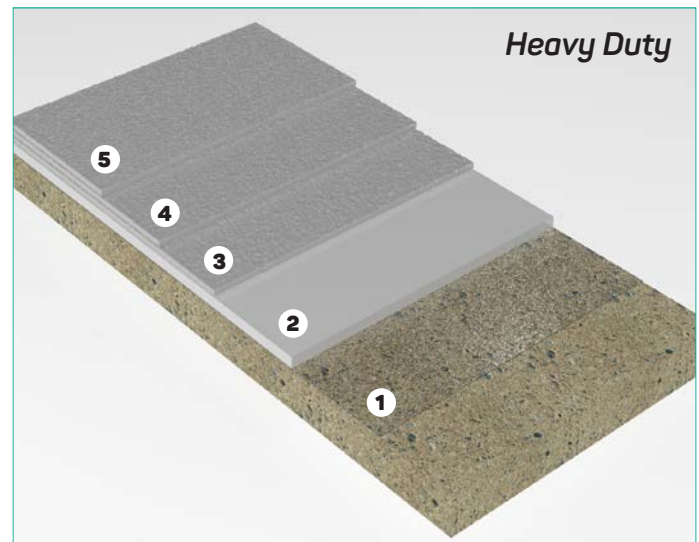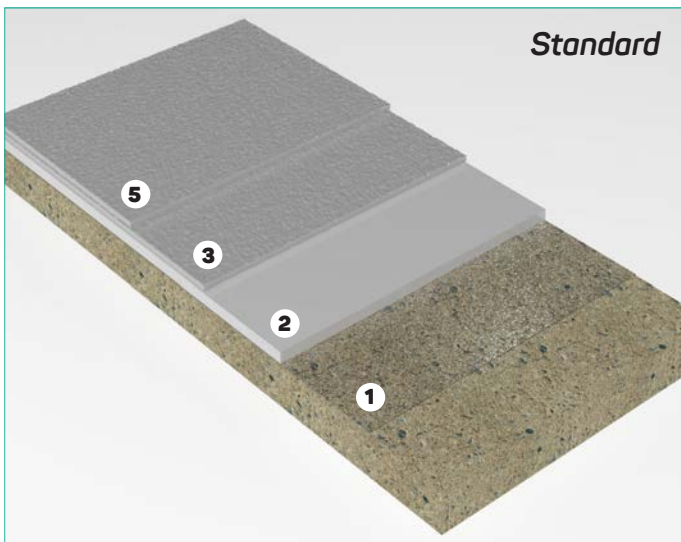

Product	Coverage Rate	Min. Wet Mil	Comments
1 Primer (condition dependent)	400 to 600 ft <sup>2</sup> /gal	N/A	See local Tremco representative
2 Vulkem 350NF	60 to 70 ft <sup>2</sup> /gal	25	See mixing instructions
3 Vulkem 346 seeded with aggregate	100 to 125 ft <sup>2</sup> /gal	15	Unimin 2040 from Junction City, GA
4 <i>Vulkem 346 seeded with aggregate</i>	<i>100 to 125 ft<sup>2</sup>/gal</i>	<i>15</i>	<i>Heavy Duty only</i>
5 Vulkem 346	100 to 150 ft <sup>2</sup> /gal	10 to 12	Vehicular traffic 72 hours after cure

## SEEDED TO REFUSAL

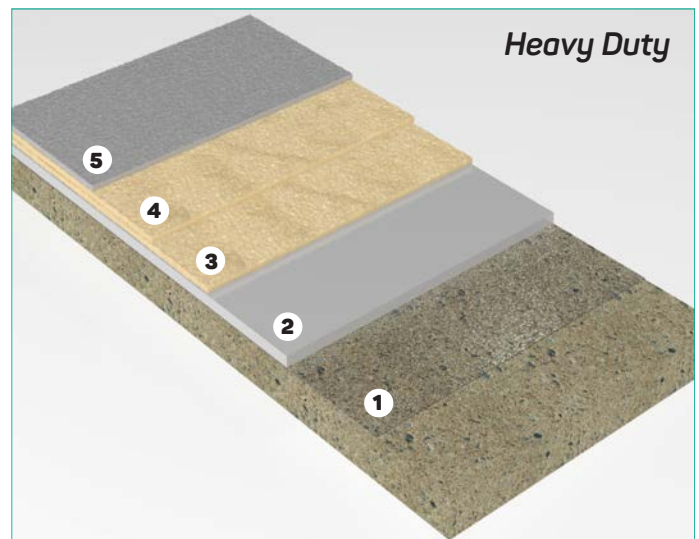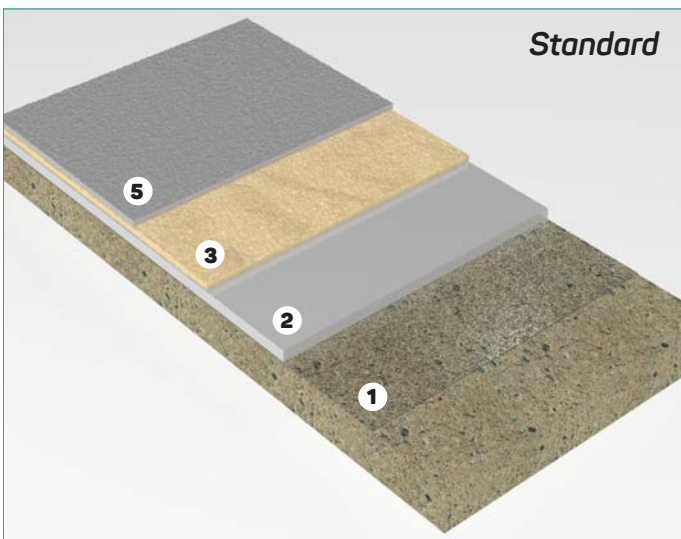

Product	Coverage Rate	Min. Wet Mil	Comments
1 Primer (condition dependent)	400 to 600 ft <sup>2</sup> /gal	N/A	See local Tremco representative
2 Vulkem 350NF	60 to 70 ft <sup>2</sup> /gal	25	See mixing instructions
3 Vulkem 346 seeded to refusal	105 ft <sup>2</sup> /gal	15	Unimin 2040 from Junction City, GA
4 <i>Vulkem 346 seeded to refusal</i>	<i>105 ft<sup>2</sup>/gal</i>	<i>15</i>	<i>Heavy Duty only</i>
5 Vulkem 346	125 to 175 ft <sup>2</sup> /gal	10 to 12	Vehicular traffic 72 hours after cure

Information may vary by region. For specific information, please contact your local Tremco CSW representative.