


SUBMITTAL SHEET

Product(s): 3/4" R. Bullnose Corner Bead

3/4" R. Bullnose Corner Bead

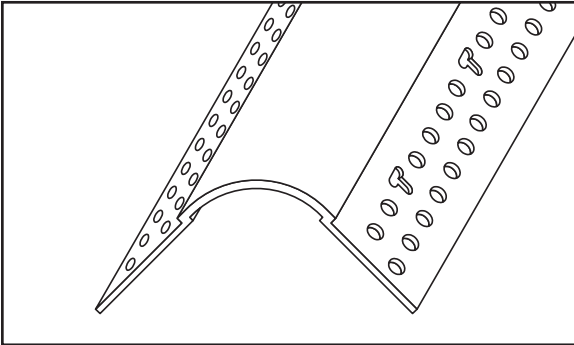

Stock #	Length	Pcs/Box
7008	8'	35
7009	9'	35
7010	10'	35
7012	12'	35

Description: Trim-Tex 3/4" R. Bullnose Corner Bead visually softens corners and adds a traditional or southwestern look. Also available in archway for curved surfaces that can finish a 15" inside or up to 20" outside radius.

Advantages: Qualifies for LEED® points. Made from rust proof, dent resistant PVC to reduce job site and handling damage. Safer than sharp square metal corners. Trim-Tex offers the most complete line of 3/4" R. Bullnose Corner Bead in the industry.

Limitations: Product is designed for interior use only.


Applicable Standards: Rigid PVC products made by Trim-Tex meet ASTM specifications D3678-97, D1784-03, C1047-99 and achieve a Class A rating for flame spread and smoke developed when tested under ASTM E84-10.

Surface Characteristics: Trim-Tex products are made from PVC. PVC does not support combustion and is self extinguishing when the source of flame or heat is removed.

Installation: Snip the bead to length and dry fit. Install with Trim-Tex 847 Spray Adhesive and 1/2" divergent staples. Detailed installation instructions are included with each product.

Finishing: To improve the bondability of drywall compounds, textures, & plaster products to any bead, use MUD-MAX Drywall Compound Additive. For texture finishes, TEX11 Texture Prep is recommended on beads with exposed PVC surfaces such as Bullnose, Super L Beads and Fast Caps. Priming is not required. Always use a high quality paint.

3/4" R. Bullnose Archway Bead

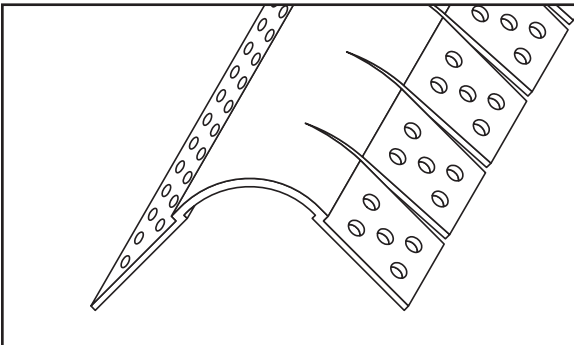

Stock #	Length	Pcs/Box
7108	8'	35
7110	10'	35

Job Name _____

Contractor _____ Date _____

Approvals (Signatures or Stamps)