


# USG DONN® BRAND DX®/DXL™ ACOUSTICAL SUSPENSION SYSTEM


USG Donn® Brand DX®/DXL™  
Acoustical Suspension System/  
USG Eclipse™ Acoustical Panels

TO ORDER SAMPLES, GO TO [USG.COM](http://USG.COM) OR [CGCINC.COM](http://CGCINC.COM)


## STANDARD COLORS<sup>4</sup>

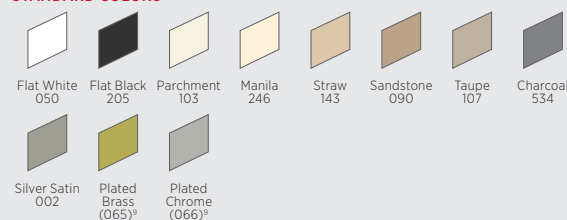

## ADVANTAGE COLORS<sup>4</sup>

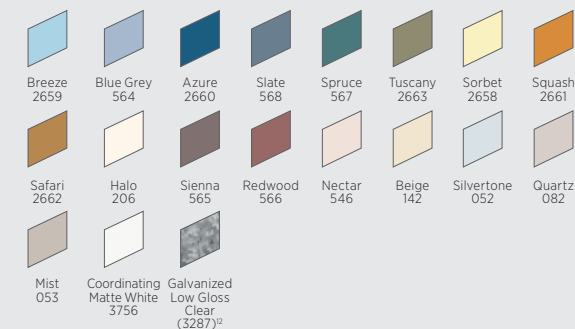


## PREMIUM COLORS

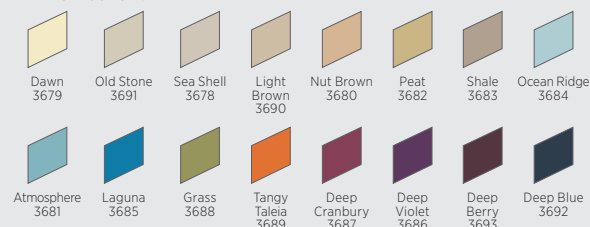


## POWDER-COATED FINISH



## PROFILE



## EDGE DETAIL

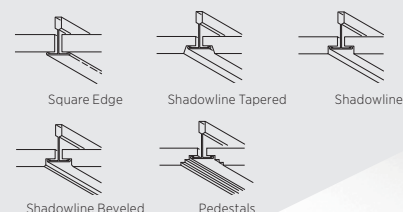

## FEATURES AND BENEFITS

- 15/16" exposed tee system. Components for use in general and fire-rated applications.
- Maximum economy and design simplicity.
- Compatible with USG Logix™ Integrated Ceiling System.
- USG DXL™ system features more than 80 UL designs (up to three hours).
- Cross-tee override-ends resist twisting and give a professionally finished look.
- Meets or exceeds all national code requirements, including seismic.
- Proprietary Quick-Release™ cross tees.
- High recycled content (HRC) available.
- Custom colors available.
- ICC-ES evaluated for seismic installations (ESR-1222).
- USG Donn® Brand DX™/DXL™ Acoustical Suspension System is part of the Ecoblueprint™ portfolio — meeting today's sustainability standards. For sustainability documentation go to [USG.com](http://USG.com) or [CGCInc.com](http://CGCInc.com).

## APPLICATIONS

- Fire-rated interior general-use areas
- USG Logix™ Integrated System

# USG DONN® BRAND DX®/DXL™ ACOUSTICAL SUSPENSION SYSTEM

ORDER SAMPLES/LITERATURE  
USG: usg.com or samplitt@usg.com  
CGC: contact Sales Representative


TECHNICAL SERVICES  
800.USG.4YOU (874-4968)

FOR MOST UP-TO-DATE  
TECHNICAL INFORMATION  
AND LEED REPORT TOOL  
usgdesignstudio.com  
cgcdesignstudio.com



Declare® Labels on select finishes, see usg.com for more details and documentation.

## 15/16" TEE SYSTEM<sup>10</sup>



## MOLDING



ASTM Class	Length	Height	Item No.	Fire Rating <sup>5</sup>	Color <sup>4,9</sup>	Seismic Design Category <sup>1</sup>			Rated Load <sup>2</sup>			
						IBC	ICC-ES Evaluated Installation	4' Hanger Spacing	5' Hanger Spacing	6' Hanger Spacing <sup>8</sup>		
Intermediate Duty	12' 3600 mm	USG 1.64" (42 mm)	DX24	Class A	Flat White Standard Advantage	A-C	7/8" Molding ACM7 Clip	12 lb./LF	6.1 lb./LF	3.6 lb./LF		
		CGC 1.5" (38 mm)	DX/DXL24									
		USG 1.64" (42 mm)	DXL26									
Heavy Duty	12' 3600 mm	CGC 1.5" (38 mm)	DX/DXL24	Class A	Flat White Standard Advantage	A-F	7/8" Molding ACM7 Clip	16 lb./LF	7.3 lb./LF	4.9 lb./LF		
		USG 1.64" (42 mm)	DXL26HRC									
	2' 600 mm	USG 1" (25 mm)	DX216	Class A	Flat White, Standard, Advantage, and Premium							
		CGC 1" (25 mm)	DX/DXL216									
		USG 1" (25 mm)	DX216									
	20"	1" (25 mm)	DX2016	Class A	Flat White, Standard, Advantage, and Premium							
	30"	1" (25 mm)	DX3016									
	3'	1-1/2" (38 mm)	DX324									
	4' 1200 mm	1-1/2" (38 mm)	USG								DXL424 <sup>11</sup>	
			CGC								DX/DXL424	
	4' (1200 mm)	1-1/2" (38 mm)	CGC								DX422 <sup>5,7,9</sup>	
											DX422HRC <sup>5</sup>	
	4' (1200 mm)	1" (25 mm)	DX416								Class A	Flat White, Standard, Advantage, and Premium
	4' (1200 mm)	1-1/2" (38 mm)	DX426 HD								Class A	Flat White, Standard, Advantage, and Premium
	5' (1500 mm)	1-1/2" (38 mm)	DXL524								Class A	Flat White, Standard, Advantage, and Premium
6'	1-1/2" (38 mm)	DX624	Class A	Flat White, Standard, Advantage, and Premium								
8'	1-1/2" (38 mm)	DX824	Class A	Flat White, Standard, Advantage, and Premium								

Wall Angle	Length	Item No.	Color	Shadowline	Wall Angle	Length	Item No.	Color
	12' 3600 mm	M7 M7HRC	Standard Advantage Premium			12' 3600 mm	MS125	Flat White Standard Advantage Premium
	10' 3000 mm	M18	Standard Advantage Premium			12' 3600 mm	MS174	Standard Advantage Premium
	10' 3000 mm	M20SM-2	Standard Advantage Premium			10' 3000 mm	MS274 <sup>5</sup>	
	10' 3000 mm	M20 <sup>5</sup> M20SM/Seismic	Standard Advantage Premium					

**Low Emissions (VOC)**  
CDPH 01350 v1.2-2017 compliance on select finishes, see usg.com for more details and documentation.

**High Recycled Content**  
USG classifies High Recycled Content as greater than 50%. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.



## PHYSICAL DATA/ FOOTNOTES

### Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

AC3167/rev. 2-23  
© 2023 USG Corporation and/or its affiliates. All rights reserved. Printed in U.S.A.

**Product literature and samples**  
Data sheet: AC3167  
USG Logix™ architectural design guide: IS287  
USG Logix™ critical system dimensions: IS609  
Sample flat white—seismic: 271370,  
Sample flat white: 215673,  
Sample main tee: 206563,  
Sample flat black: 205100

**Material**  
Min. G30 hot-dipped galvanized steel body and cap. Baked-on polyester paint.

**Installation**  
Install according to ASTM C636, ASTM E580, C15CA and USG requirements. Alternate installation methods may be used when approved by the authority having jurisdiction.

**Online tools**  
usgdesignstudio.com or cgcdesignstudio.com

**ICC Evaluation Service, LLC Report Compliance**  
For areas under ICC jurisdiction, see ICC-ES Evaluation Report ESR-1222 for allowable values and conditions of use. Reports are subject to reexamination, revision and possible cancellation. Refer to usg.com for most current version.

**ASTM Load Compliance**  
Classified as Light, Intermediate or Heavy Duty when tested in accordance with ASTM C635.

### Notes

- All USG DX®/DXL™ main-tee and cross-tee connections meet IBC requirements for tension and compression strength, as tested per ASTM E3090.
- Load test data shows uniform load in lb./LF based on simple span tests in accordance with ASTM C635 deflection limit of L/360.
- UL fire-rated listing, labeling and follow-up applies only to fire-rated components.
- Color program for imperial only. Consult Customer Service for custom color and metric-tee colors. Upcharges apply to Standard and Advantage colors.
- Non-fire-rated only.
- Non-fire-rated applications may mix USG DX® and DXL™ parts.
- Panels must be specified to be field-cut and field-revealed and to provide widest possible lay-on edge.
- For USG DXL™, channel moldings are also acceptable in some designs. Check *UL Fire Resistance Directory* for molding options.
- Brass and chrome available on limited items.
- Metric sizes listed are available with standard lead times. Other metric sizes available by RTQ.
- Non-Fire Rated DX424 offered for West Coast customers only.
- Galvanized Low Gloss Clear is available in USG Donn® Brand DX® / USG Donn® Brand DXL™ Acoustical Suspension System only.

Manufactured by USG Interiors, LLC  
550 West Adams Street  
Chicago, IL 60661

The trademarks USG, CGC, DONN, DX, DXL, ECLIPSE, ECOBLUEPRINT, FIRECODE, LOGIX, QUICK-RELEASE, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.

