

USG ENSEMBLE® ACOUSTICAL DRYWALL CEILING—DIRECT MOUNT SYSTEM

SEAMLESS APPEARANCE WITH EXCELLENT ACOUSTIC PERFORMANCE



TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM

STANDARD COLOR



Flat White
050

CUSTOM COLORS AVAILABLE



Unlimited
Color Options

FEATURES AND BENEFITS

- Monolithic appearance with fine finish in standard white and custom colors.
- Z-Furring framing system enables the USG Ensemble® ceiling system to be direct mounted to existing ceilings, overhead structures, framing or joists.
- Perforated USG Sheetrock® Brand Ensemble® Four-Sided Taper™ Panels, USG High-NRC Backer Panels and acoustically transparent USG Ensemble™ Spray-Applied Finish optimize sound absorption in the system; NRC 0.80.
- Installs and finishes using traditional drywall techniques and USG Ensemble™ Spray-Applied Finish.
- Backed by USG's design and engineering, certified installer and sales support network and full system warranty.

APPLICATIONS

- Lobbies
- Atria
- Concourses
- Museums
- Performing arts spaces
- Corporate interiors
- Board rooms/
executive offices
- Classrooms/
higher education
- Hospitality
- Restaurants



USG ENSEMBLE® ACOUSTICAL DRYWALL CEILING—DIRECT MOUNT SYSTEM

ORDER SAMPLES/LITERATURE
 USG: samplif@usg.com
 phone: 866 528-7089 | usg.com
 CGC: contact Sales Representative

TECHNICAL SERVICES
 800 USG.4YOU (874-4968)


TECHNICAL INFORMATION
usg.com/ensemble



PRODUCT CERTIFIED FOR LOW CHEMICAL EMISSIONS:
 ULCOM/GG
 UL 2818



Declare.

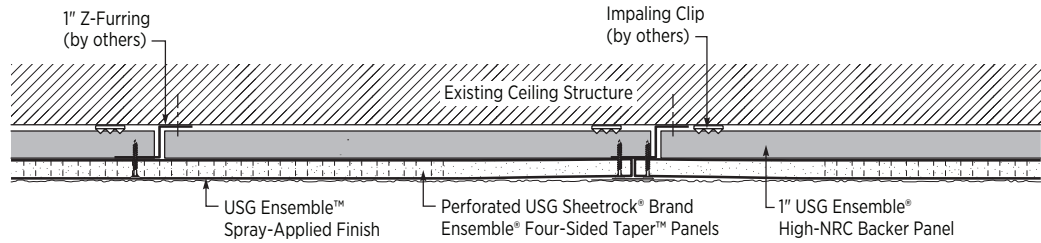

PERFORMANCE DATA

| Base Panel | Furring | Backer Panel | NRC | LR | Fire Performance |
|--|---------|---------------------------|------|-----|------------------|
| 5/8" USG Sheetrock® Brand Ensemble® Four-Sided Taper™ Panels | 1" Z | 1" USG Ensemble® High-NRC | 0.80 | .85 | Class A |

Ensemble Direct Mount shall be properly fastened to framing, and considerations shall be given to the load-carrying capacity of the framing system.

SYSTEM COMPONENTS

*Refer to Z-Furring and Impaling Clip manufacturer's literature.

| Products | Item Number | Sizes | Packaging | Quantity | Notes |
|---|----------------------------|------------------------------------|-------------------------------|--|--|
| 1" 20 ga. Z-Furring* (by others) | — | — | — | — | 24" o.c. framing |
| Insulation Impaling Clip* (by others, AST Acoustics or equal) | — | — | — | — | Two clips for each backer panel |
| 5/8" USG Sheetrock® Brand Ensemble® Four-Sided Taper™ Panels | ENSPNL96, ENSPNL120 | 5/8" x 4' x 8', 5/8" x 4' x 10' | 26-pc. unit | 8'—832 sq. ft./unit 10'—1040 sq. ft./unit | Gypsum panel highly engineered to perform like an acoustical ceiling panel |
| 1" USG Ensemble® High-NRC Backer Panels | ENSHINRC | 1" x 23.5" x 47.75" | 4-pc. unit | 31.3 sq. ft./carton | Acoustical base mat for High-NRC/High-CAC |
| USG Sheetrock® Brand Paper Joint Tape | — | 250' roll | 20 rolls per carton | 5,000 LF/ctn | Specially formulated paper tape |
| USG Sheetrock® Brand All Purpose Joint Compound | USAPJC | 4.5-gal. pail | Single pail 48-pail pallet | 216 gal./pallet | Coverage 100 sq. ft./gal. 450 sq. ft./4.5-gal. pail |
| USG Sheetrock® Brand Ensemble™ Ceiling Compound | ENSCJC | 4.5-gal. pail | Single pail 48-pail pallet | 216 gal./pallet | Coverage 106 sq. ft./gal. 480 sq. ft./4.5-gal. pail |
| USG Ensemble™ Spray-Applied Finish, White, Custom Colors | ENSSPRAF | 4.5-gal. pail | Single pail 48-pail pallet | 216 gal./pallet | Coverage 80-100 sq. ft./4.5-gal. pail |

USG ENSEMBLE® ACOUSTICAL DRYWALL COLOR PROGRAM

The USG Ensemble® Acoustical Drywall Ceiling and Wall systems are available in white and by custom color matching through the following companies:

- Benjamin Moore®
 - Sherwin-Williams®
 - PANTONE®
- How the program works:
1. Minimum order quantity for USG Ensemble™ Spray-Applied Finish is 8 pails.
 2. Request customer color samples through your local USG Ensemble® sales representative.
 3. Allow three weeks to receive custom color sample.
 4. Once the color sample is approved and the order is placed by the purchaser, allow three weeks for the custom-colored USG Ensemble™ Spray-Applied Finish to ship with the USG Ensemble® acoustical drywall order.
 5. The USG Ensemble™ Spray-Applied Finish is similar to flat finish paint in sheen. Different sheens are not offered at this time.
 6. Certain very deep tone colors or certain very bright colors may not be possible to match. USG will be able to determine at the time of the custom color sample request.

PHYSICAL DATA

Design Guide
 Download SC5075 at usg.com/ensemble

ASTME1264 Classification
 Type XX – Gypsum, Pattern G
 Fire Class A

Weight
 Total System weight 3.2 lb/ft²

Maintenance
 Download SC5048 at usg.com/ensemble

ASTM E84 and CAN/ULC S102 surface-burning characteristics
 Class A
 Flame Spread: 25 or less
 Smoke developed: 50 or less

- Limitations**
1. For interior ceilings only.
 2. Not for use in areas subject to continuous high heat and/or humid conditions.
 3. Install according to Section 5 Environmental Conditions listed in ASTM C840.
 4. In order to ensure installed performance, component substitutions should not be permitted.

Notice
 The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

SC3237/rev. 6-22
 © 2022 USG Corporation and/or its affiliates. All rights reserved. Printed in USA

Manufactured by
 USG Interiors, LLC
 550 West Adams Street
 Chicago, IL 60661

The trademarks USG, CGC, COMPASSO, ENSEMBLE, SHEETROCK, FOUR-SIDED TAPER, IT'S YOUR WORLD. BUILD IT., the USG and CGC logos, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.
 Declare is a trademark of International Living Future Institute.
 The trademark BENJAMIN MOORE is a registered trademark of Benjamin Moore & Co. The trademark SHERWIN-WILLIAMS is a registered trademark of The Sherwin-Williams Company. The trademark PANTONE is the property of Pantone LLC.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.

