
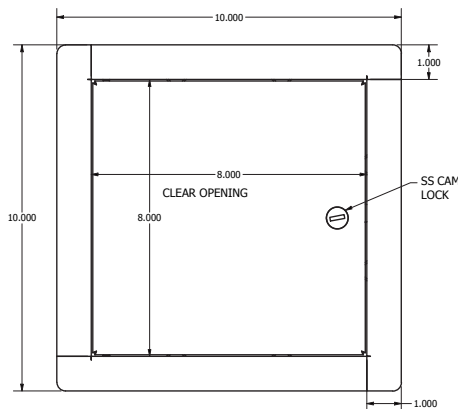


SUBMITTAL SHEET

WALLS & CEILINGS

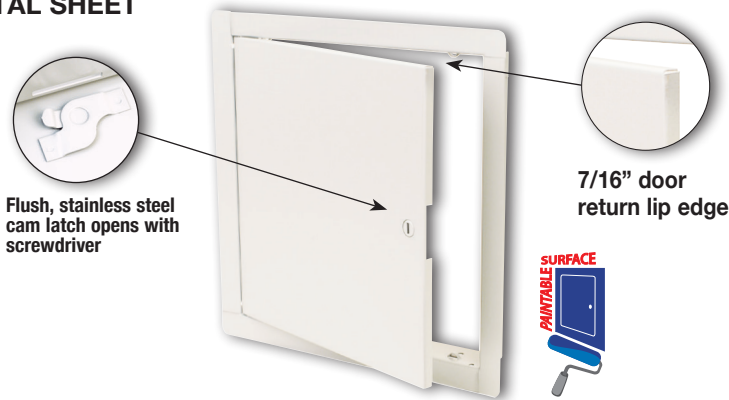

THE WILLIAMS BROTHERS ADVANTAGE


Durability: Taber Abrasion Tested - Withstood 4,550 cycles (ASTM D4060) with a wear index of 91.1 for a durable, long-lasting finish.

Corrosion Resistance: Salt Spray Tested - Withstood 48 hours of ASTM B117 exposure with only slight edge rusting, demonstrating excellent resistance to harsh environments.

UV Resistance: Tested to ASTM G155 & G154 standards - Withstood 48 hours of continuous UV exposure with negligible visual change, ensuring color stability and finish durability in sunlit environments.



SECTION DETAIL

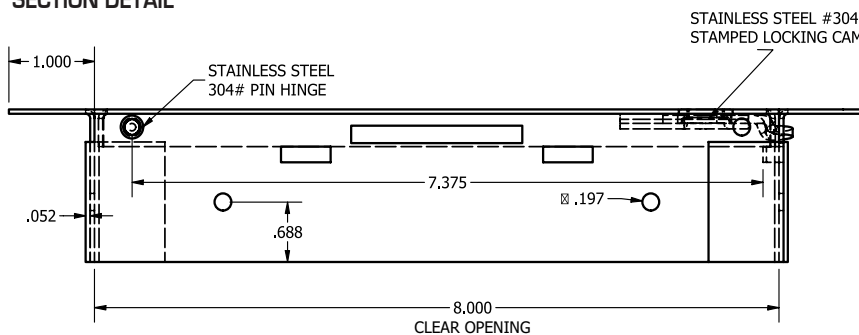

This cost effective access door is made with cold rolled steel and powder coated white baked enamel finish (paintable). This door is for indoor and outdoor use. When price is an issue, bid any job with confidence using the WB-Basic Door.

1. When a door increases in size, more cams are added for security in the ceiling or wall
2. For requests on clear opening after door installed, please email info@wbdoors.com
3. All installation holes must be used for proper door functionality and security
4. For custom sizes, please reach out to info@wbdoors.com
5. Clear opening may be impeded by structural or functional parts on door
6. Drawings of any door can be requested through info@wbdoors.com

Project: _____ Date: _____
Contractor: _____ Architect: _____
Sizes: _____ Quantity: _____ App Initials: _____

1330 Progress Drive • Front Royal, VA 22630 • Phone: 1-800-255-5515 • www.wbdoors.com

SPECIFICATIONS:

Door & Trim: 18 ga. steel

Finish: Primed white baked enamel, paintable surface

Lock: Stainless steel flush cam latch

Hinge: Pin hinge top and bottom. Allows opening to 165°

OPTIONS (at additional cost)

Finishes:

- ☐ Stainless Steel Type 304 No. 4 Satin Finish Brushed
- ☐ Stainless Steel Type 316 No. 4 Satin Finish Brushed

Options: (additional cost)

- ☐ WB Key Cylinder Locks - keyed alike 2 keys per door
- ☐ Custom colors
- ☐ Special sizes available

For clear openings after installation please send request to info@wbdoors.com

✓	Model No.	Door Size W x H	Wall Opening	Cam Latches	Ship Wt. Lbs.
	BASIC 300	6 x 6	6 1/4 x 6 1/4	1	4
	BASIC 300	8 x 8	8 1/4 x 8 1/4	1	5
	BASIC 300	8 x 12	8 1/4 x 12 1/4	1	6
	BASIC 300	8 x 16	8 1/4 x 16 1/4	1	8
	BASIC 300	10 x 10	10 1/4 x 10 1/4	1	6
	BASIC 300	12 x 12	12 1/4 x 12 1/4	1	8
	BASIC 300	12 x 16	12 1/4 x 16 1/4	3	10
	BASIC 300	12 x 18	12 1/4 x 18 1/4	3	11
	BASIC 300	12 x 24	12 1/4 x 24 1/4	4	15
	BASIC 300	14 x 14	14 1/4 x 14 1/4	3	10
	BASIC 300	14 x 24	14 1/4 x 24 1/4	4	14
	BASIC 300	16 x 16	16 1/4 x 16 1/4	3	13
	BASIC 300	16 x 20	16 1/4 x 20 1/4	3	16
	BASIC 300	16 x 24	16 1/4 x 24 1/4	4	17
	BASIC 300	18 x 18	18 1/4 x 18 1/4	3	14
	BASIC 300	18 x 24	18 1/4 x 24 1/4	4	18
	BASIC 300	18 x 36	18 1/4 x 36 1/4	5	29
	BASIC 300	20 x 20	20 1/4 x 20 1/4	3	17
	BASIC 300	20 x 24	20 1/4 x 24 1/4	4	21
	BASIC 300	20 x 30	20 1/4 x 30 1/4	4	23
	BASIC 300	22 x 22	22 1/4 x 22 1/4	4	22
	BASIC 300	22 x 24	22 1/4 x 24 1/4	4	23
	BASIC 300	22 x 30	22 1/4 x 30 1/4	4	25
	BASIC 300	22 x 36	22 1/4 x 36 1/4	4	32
	BASIC 300	24 x 24	24 1/4 x 24 1/4	4	24
	BASIC 300	24 x 30	24 1/4 x 30 1/4	4	27
	BASIC 300	24 x 36	24 1/4 x 36 1/4	4	35
	BASIC 300	24 x 48*	24 1/4 x 48 1/4	5	43
	BASIC 300	30 x 30	30 1/4 x 30 1/4	6	32
	BASIC 300	30 x 36	30 1/4 x 36 1/4	6	39
	BASIC 300	32 x 32	32 1/4 x 32 1/4	6	35
	BASIC 300	36 x 36	36 1/4 x 36 1/4	6	44

* Sizes 36 x 48 or larger ship with approximately 1.5" flange.



The World's Largest Access Door Store.™

