



SUBMITTAL SHEET


Flush, stainless
steel cam latch
opens with screw-
driver

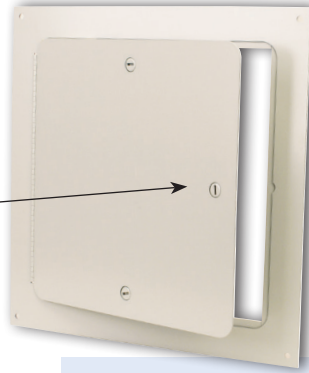

FRONT ELEVATION

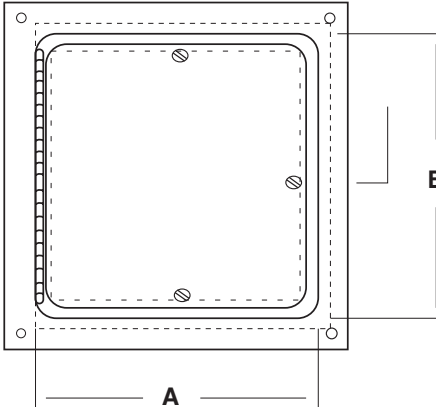

SECTION DETAIL

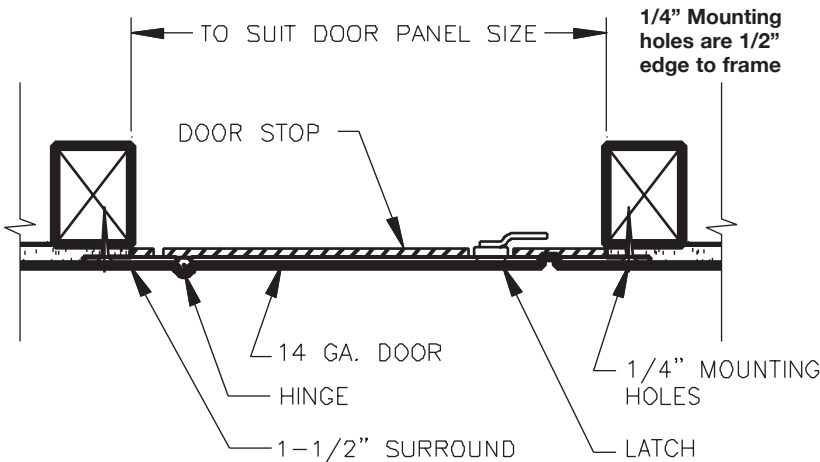

Durability: Taber Abrasion Tested - Withstood 4,550 cycles (ASTM D4060) with a wear index of 91.1 for long-lasting finish.

Corrosion Resistance: Salt Spray Tested - Withstood 48 hours of ASTM B117 exposure with only slight edge rusting, demonstrating excellent resistance to harsh environments.

UV Resistance: Tested to ASTM G155 & G154 standards - Withstood 48 hours of continuous UV exposure with negligible visual change, ensuring color and finish durability in sunlit environments.



SPECIFICATIONS:

Door: 14 ga. steel, 1-1/2" trim

Door Stops: 16 ga. steel on 3 sides of door opening

Finish: Primed white baked enamel, **paintable surface**

Latches: Flush, stainless steel cam latch

Hinge: Full length piano hinge allows door to open to 180°

OPTIONS [at additional cost]

Finishes:

- ☐ Stainless Steel Type 304 No. 4 Satin Finish Brushed
- ☐ Stainless Steel Type 316 No. 4 Satin Finish Brushed

Options: [additional cost]

- ☐ WB Key Cylinder Locks - keyed alike 2 keys per door
- ☐ Neoprene gasket 3 sides
- ☐ Special sizes available

✓	Model No.	Door Size & Opening	Cam Latches	Ship Wt. Lbs.
	SMP 120	6 1/2 x 6 1/2	1	4
	SMP 120	8 1/2 x 8 1/2	1	5
	SMP 120	8 1/2 x 12 1/2	1	6
	SMP 120	8 1/2 x 16 1/2	1	8
	SMP 120	10 1/2 x 10 1/2	3	6
	SMP 120	12 1/2 x 12 1/2	3	8
	SMP 120	12 1/2 x 16 1/2	3	10
	SMP 120	12 1/2 x 18 1/2	3	11
	SMP 120	12 1/2 x 24 1/2	4	15
	SMP 120	14 1/2 x 14 1/2	3	10
	SMP 120	14 1/2 x 24 1/2	3	14
	SMP 120	16 1/2 x 16 1/2	3	13
	SMP 120	16 1/2 x 20 1/2	3	16
	SMP 120	16 1/2 x 24 1/2	4	17
	SMP 120	18 1/2 x 18 1/2	3	14
	SMP 120	18 1/2 x 24 1/2	4	18
	SMP 120	18 1/2 x 36 1/2	5	29
	SMP 120	20 1/2 x 20 1/2	3	17
	SMP 120	20 1/2 x 24 1/2	4	21
	SMP 120	20 1/2 x 30 1/2	4	23
	SMP 120	22 1/2 x 22 1/2	4	22
	SMP 120	22 1/2 x 24 1/2	4	23
	SMP 120	22 1/2 x 30 1/2	4	25
	SMP 120	22 1/2 x 36 1/2	5	32
	SMP 120	24 1/2 x 24 1/2	4	24
	SMP 120	24 1/2 x 30 1/2	4	27
	SMP 120	24 1/2 x 36 1/2	5	35
	SMP 120	24 1/2 x 48 1/2	6	43
	SMP 120	30 1/2 x 30 1/2	6	32
	SMP 120	30 1/2 x 36 1/2	6	39
	SMP 120	32 1/2 x 32 1/2	6	35
	SMP 120	36 1/2 x 36 1/2	7	44
	SMP 120	36 1/2 x 48 1/2	8	57
	SMP 120	48 1/2 x 48 1/2	12	70

When access is a requirement without a framed opening, our precision fit surface mounted access door is the solution in all types of walls and ceilings. The frame is laser cut from one sheet of steel for visual aesthetics with no recess.

1. When a door increases in size, more cams are added for security
2. For requests on clear opening after door installed, please email info@wbdoors.com
3. All installation holes must be used for proper door functionality and security
4. For custom sizes, please reach out to info@wbdoors.com
5. Clear opening may be impeded by structural or functional parts on door
6. Drawings of any door can be requested through info@wbdoors.com

Project: _____ Date: _____
Contractor: _____ Architect: _____
Sizes: _____ Quantity: _____ App Initials: _____

1330 Progress Drive • Front Royal, VA 22630 • Phone: 1-800-255-5515 • www.wbdoors.com



The World's Largest Access Door Store.™

